

ZA13 maratone

PR48

Hearing Aid Battery

Swiss Made



Technical Data Sheet

Specifications

Chemical system	Zinc / Air
Nominal Voltage	1,4 V
Capacity	305 mAh , discharge over 1,500 k Ω 12 hours per day at 20°C to 0,9 V
Self Discharge	Less than 5% per year at 20°C with label applied
Weight	~0,85 g (0.03oz.)

These batteries need air when they are used


Battery compartment must allow free access of air

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Dimensions


(according IEC 60086-2)

Diameter	7.83 mm (0,308")
Height	5.30 mm (0,213")

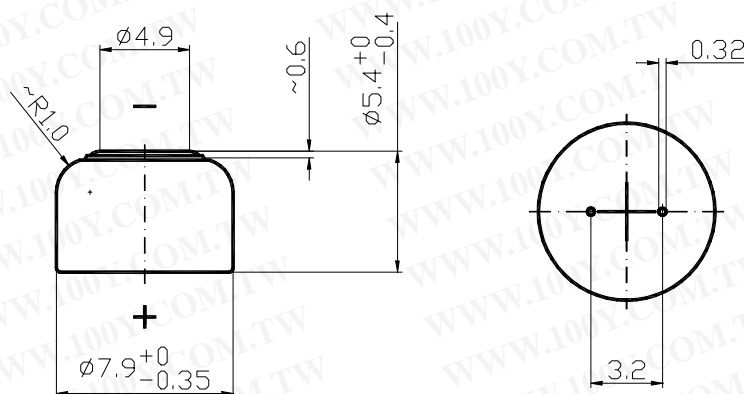


Discharge Curve

Constant Resistance Load
1,500 k Ω

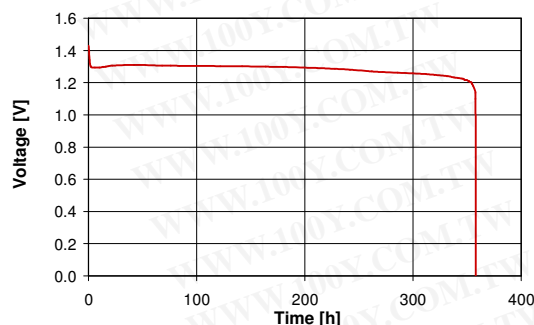

12 hours per day at 20°C, 50% rh
 (according IEC 60086-2)

High Power Load
3 mA current drain, 12 mA puls drain for 100 ms every 2 hours

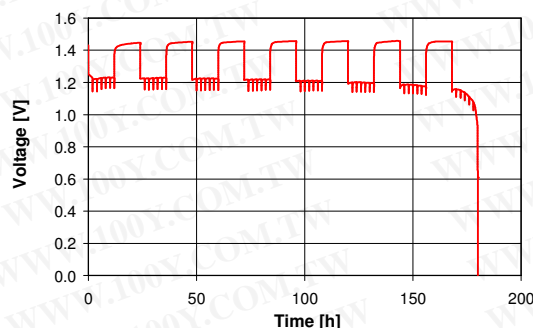

12 hours per day at 20°C, 50% rh
 (according IEC 60086-2, 35/1185/CD)

Information and contents in this data sheet are for reference purpose only. They do not constitute any warranty or representation and are subject to change without notice. For most current information and further details, please contact your Renata representative.

Rev. ZA13.14 03/07