


Lithium Manganese Dioxide Battery

CR1620

■ Dimensions(mm)

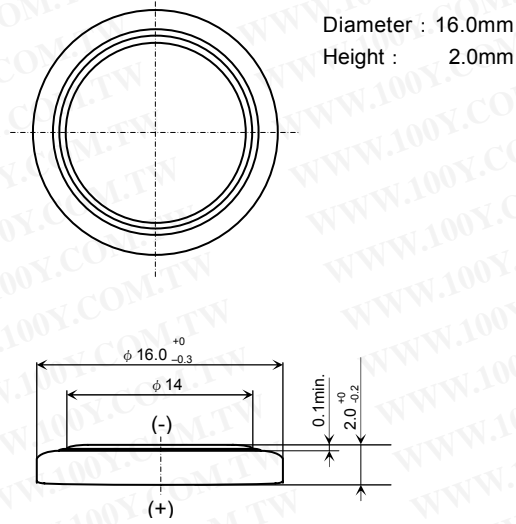

■ Specifications


Nominal Voltage	3V
Nominal Capacity (2.0V cutoff)	78mAh
Standard Discharge Current	0.1mA
Weight	1.2g

Applications


- Electronic Watch or Clock
- Electronic Calculator
- Memory Back-up Power Source for SRAM or Real Time Clock (RTC)

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)


■ Discharge Characteristics

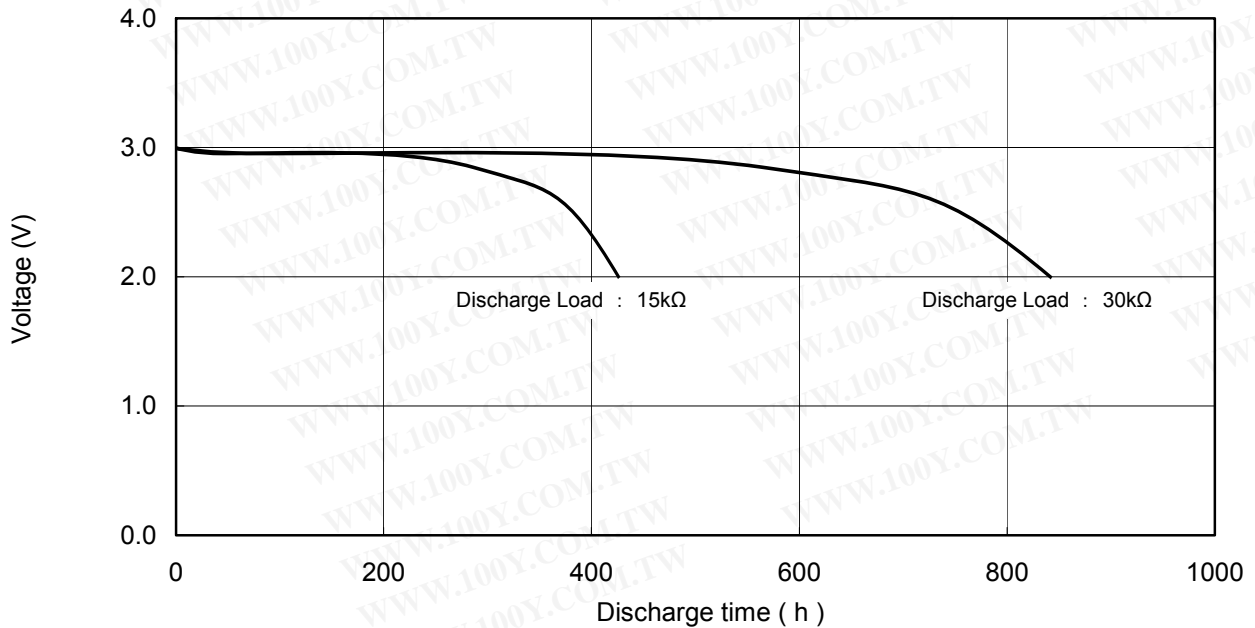


■ Discharge Characteristics on Load

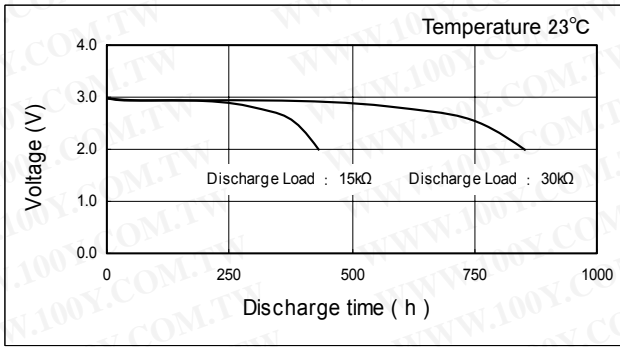


■ Discharge Characteristics on Temperature

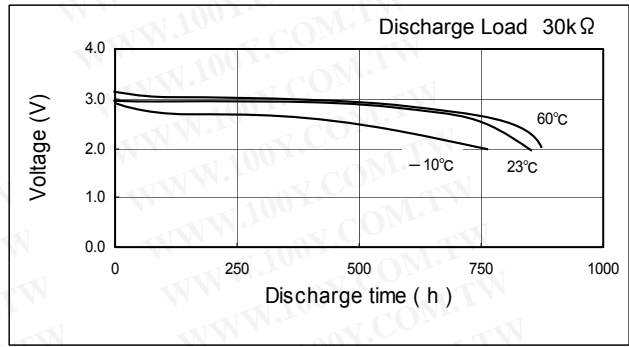


■ Discharge Load vs. Operation Voltage (Discharge depth 40%)

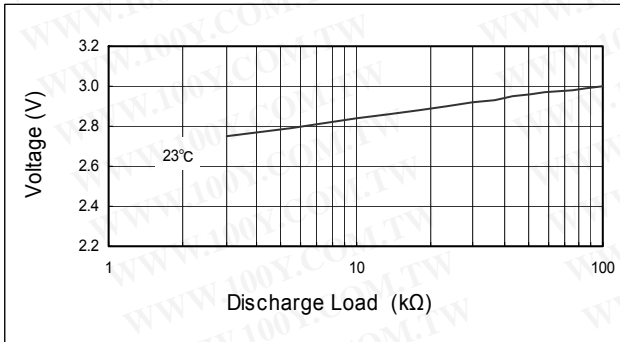


■ Discharge Load vs. Discharge Capacity

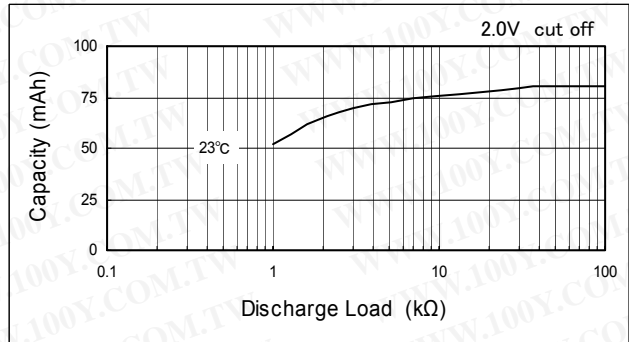

■ Discharge Characteristics on Pulse Load (Discharge depth 40%)

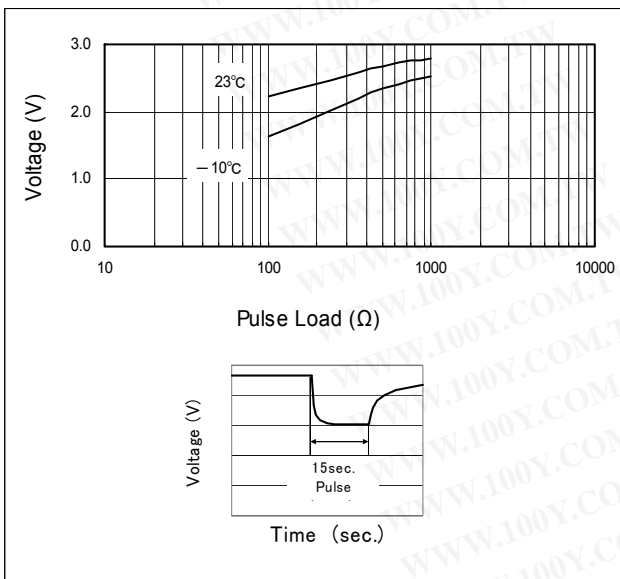

■ Storage Characteristics

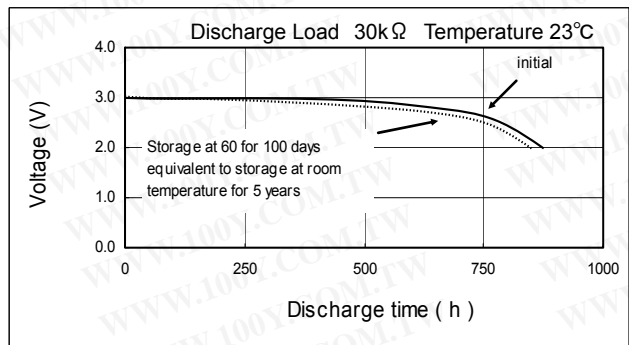

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

* These values are not guarantee.