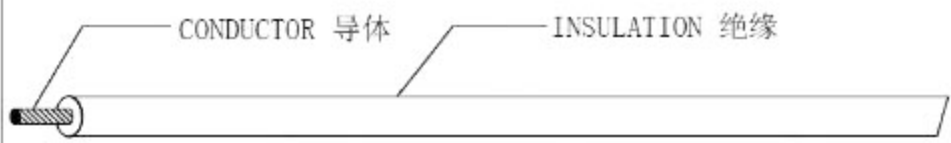


规格承认书

SPECIFICATION FOR APPROVAL

规格型号 SPEC NO.	特软硅胶线系列		
额定温度 RATED TEMPERATURE	200℃	额定电压 RATED VOLTAGE	600V
环保标准 ENVIRONMENTAL STANDARDS	ROHS	参照标准 REFERENCE STANDARD	NOUL
CONSTRUCTION FIGURE 结构简图			

TECHNICAL PARAMETERS 技术参数

AWG 线号数	(NO./mm) (±0.008) 线数/线径	Dia. (mm) 导体外径	Non. Thick. (mm) 平均厚度	Dia. (mm) 成品外径	COND. RESISTANCE 导体电阻 (Ω/KM20℃)	INSU. RESISTANCE 绝缘电阻 (MΩ/KM20℃)	DIELECTRIC TEST 耐压测试 (AC V/min)
30	11/0.08TS	0.31(Ref)	0.40	1.2±0.1	381	10	2000
28	16/0.08TS	0.37(Ref)	0.40	1.3±0.1	239	10	2000
26	30/0.08TS	0.48(Ref)	0.40	1.5±0.1	150	10	2000
24	40/0.08TS	0.58(Ref)	0.40	1.6±0.1	94.2	10	2000
22	60/0.08TS	0.72(Ref)	0.40	1.7±0.1	59.4	10	2000
20	100/0.08TS	0.92(Ref)	0.40	1.8±0.1	36.7	10	2000
19	120/0.08TS	1.01(Ref)	0.40	2.0±0.1	34.6	10	2000
18	150/0.08TS	1.28(Ref)	0.50	2.3±0.1	26.0	10	2000
17	210/0.08TS	1.40(Ref)	0.50	2.7±0.1	18.3	10	2000
16	252/0.08TS	1.66(Ref)	0.50	3.0±0.15	14.6	10	2000
15	300/0.08TS	1.80(Ref)	0.50	3.2±0.15	13.7	10	2000
14	400/0.08TS	2.09(Ref)	0.76	3.5±0.15	8.96	10	2000
13	500/0.08TS	2.30(Ref)	0.76	3.8±0.15	8.21	10	2000
12	680/0.08TS	2.73(Ref)	0.76	4.5±0.15	5.64	10	2000
11	750/0.08TS	2.90(Ref)	1.0	5.0±0.2	5.09	10	2000
10	1050/0.08TS	3.43(Ref)	1.0	5.4±0.2	3.546	10	2000
9	1300/0.08TS	3.70(Ref)	1.0	5.7±0.2	2.813	10	2000
8	1650/0.08TS	4.00(Ref)	1.0	6.0±0.2	2.230	10	2000
7	2100/0.08TS	4.85(Ref)	1.0	7.5±0.25	1.768	10	2000
6	3200/0.08TS	6.0(Ref)	1.0	8.5±0.25	1.403	10	2000
5	3400/0.08TS	6.18(Ref)	1.0	8.7±0.3	1.113	10	2000
4	4300/0.08TS	6.97(Ref)	1.0	9.0±0.3	0.8820	10	2000
3	5000/0.08TS	7.60(Ref)	1.5	10.7±0.3	0.7950	10	2000
2	6700/0.08TS	8.70(Ref)	1.5	12.5±0.3	0.5548	10	2000

特软硅胶系列

商品全名	规格	外径	单位	
特软硅胶线30A	11/0.08TS	1.2	300M/R	
特软硅胶线28A	16/0.08TS	1.3	300M/R	
特软硅胶线26A	30/0.08TS	1.5	300M/R	
特软硅胶线24A	40/0.08TS	1.6	300M/R	
特软硅胶线22A	60/0.08TS	1.7	300M/R	
特软硅胶线20A	100/0.08TS	1.8	300M/R	
特软硅胶线18A	150/0.08TS	2.3	200M/R	
特软硅胶线16A	252/0.08TS	3.0	200M/R	
特软硅胶线14A	400/0.08TS	3.5	200M/R	
特软硅胶线12A	680/0.08TS	4.5	100M/R	
特软硅胶线10A	1050/0.08TS	5.4	100M/R	
特软硅胶线8A	1650/0.08TS	6.0	100M/R	
特软硅胶线6A	3200/0.08TS	8.5	100M/R	
特软硅胶线4A	4300/0.08TS	9.0	100M/R	
特软硅胶线2A	6700/0.08TS	12.5	100M/R	
特软硅胶线1A	10640/0.08TS	15.8	50M/R	

耐高温特软硅胶线

耐温：200°C
-60°

紫/灰
红/黑/白/蓝/绿/黄/棕/橙

耐高低温/0.08铜丝/柔软耐折

特软硅胶线



抗氧化镀锡铜导线

0.08mm镀锡铜线芯
接触空气不易氧化



互绞合缠绕工艺

导线紧密绞合
降低信号干扰，提升导电性能



进口硅胶原料



耐高温
200°C



耐低温
-60°C



节能环保

柔软硅胶绝缘体

柔软耐折
高强柔韧性不易断



耐高温 耐低温

高温+200°C 阻燃绝缘
低温-60°C 冬天也柔软



多种型号规格

美标品质 值得信赖

