


Copper Braid Shield Control Cable

鋁箔 + 銅網編織隔離控制電纜

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Stranded Conductor			No of	Insulation Thickness	Insulation Diameter	Overall Diameter	Part No.
斷面積	線號	線數/線徑	Core	絕緣厚度	芯線外徑	完成外徑	紀泰 產品編號
MM ²	AWG	NO/MM	芯數	MM	MM	MM	BS 系列
1.25	16	50/0.18 或 7/0.45	2C	0.55	2.5	7.4	BS125-02C
			3C	0.55	2.5	8.0	BS125-03C
			4C	0.55	2.5	8.8	BS125-04C
			5C	0.55	2.5	10.0	BS125-05C
			6C	0.55	2.5	11.0	BS125-06C
			7C	0.55	2.5	11.0	BS125-07C
			8C	0.55	2.5	11.8	BS125-08C
			10C	0.55	2.5	13.4	BS125-10C
			12C	0.55	2.5	13.8	BS125-12C
			16C	0.55	2.5	15.6	BS125-16C
20C	0.55	2.5	16.7	BS125-20C			

Construction:

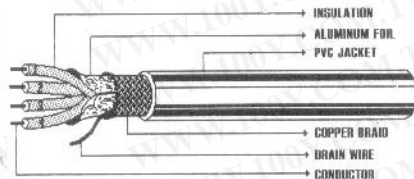

產品特性：

- 導體：裸軟銅線絞合
- 芯線：PVC、PE絕緣，顏色或號碼識別
- 遮蔽：鋁箔加裸軟銅線，遮蔽率100%
- 外被：PVC、PE被覆
- 導體電阻最大：
 - 0.5mm²(20A WG):36.9Ω/km20°C
 - 0.75mm²(18A WG):22.6Ω/km20°C
 - 1.25mm²(16A WG):14.2Ω/km20°C
 - 2.00mm²(14A WG):8.88Ω/km20°C
- 絕緣電阻最小：50MΩ/km以上(20°C)
- 耐溫：60°C，亦可指定80°C，90°C，105°C
- 耐電壓：600V
- 亦可指定耐燃 耐油抗螞蟻和老鼠破壞PVC外被材質