DATE: <u>12/30/2011</u>

cosmo

ELECTRONICS CORPORATION

Photocoupler:

KMOC3011

NO.60P47001

REV.

SHEET 1 OF 6

CO

特力材料886-3-5753170

胜特力电子(深圳) 86-755-83298787 Http://www.100y.com.tw

胜特力电子(上海) 86-21-34970699

Non Zero Crossing Optoisolators TRIAC Driver Output (600V Volts Peak)

Features

- 1. Pb free and RoHS compliant.
- 2. Compact dual-in-line package.
- 3. 600V peak blocking voltage.
- 4. Isolation voltage between input and output (Viso: 5300Vrms).
- 5. Safety Approval:

UL approved: No.E169586 CUL approved: No.E169586 VDE approved: No.101347

For 115/240 Vac(rms) Application :

- 1. Solenoid/Valve Controls.
- 2. Lighting Controls.
- 3. Static Power Switches.
- 4. AC Motor Drives.
- 5. Temperature Controls.
- 6. E.M. Contactors.
- 7. AC Motor Starters.
- 8. Solid State Relays.
- 9. Programmable controllers.

DATE: 12/30/2011

cosmo

ELECTRONICS CORPORATION

Photocoupler:


KMOC3011

NO.60P47001

REV.


SHEET 2 OF 6

1. OUTSIDE DIMENSION: UNIT (mm)

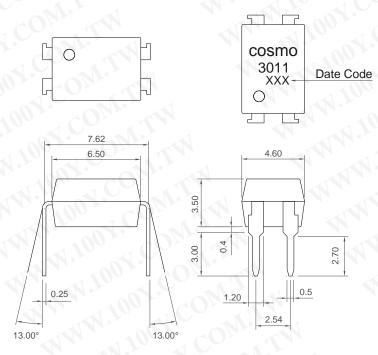

TOLERANCE: ±0.2mm

2. SCHEMATIC: TOP VIEW



- 1. Anode
- 2. Cathode
- 3. Main Terminal
- 4. Main Terminal

DATE: 12/30/2011

cosmo

Photocoupler:

NO.60P47001
SHEET 3 OF 6

REV.

ELECTRONICS CORPORATION

KMOC3011

Absolute Maximum Ratings

	Parameter	Symbol	Rating	Unit
Input	Forward current	JF .	50	mA
	Peak forward current	Iғм	(10)	Α
	Reverse voltage	VR	6 0	V
	Power dissipation	Po	70	mW
Output	Off-State Output Terminal voltage	VDRM	600	VPEAK
	On-State R.M.S. Current	IT(RMS)	100	mA
	Peak Repetitive Surge Current (PW=10ms.DC 10%)	Ітѕм	100	A
	Power dissipation	PD	300	mW
N	Total power dissipation	Ptot	330	mW
	Isolation voltage 1 minute	Viso	5300	Vrms
	Operating temperature	Topr	-40 to +100	$^{\circ}$ C
	Storage temperature	Tstg	-55 to +125	√ ℃
Mr.	Soldering temperature 10 second	Tsol	260	$^{\circ}$ C

• Electro-optical Characteristics

	Parameter	Symbol	Conditions	Min.	Тур.	Max.	Unit
Input	Forward voltage	VF	IF=10mA	-	1.2	1.4	٧
	Reverse current	lR	VR=6V	-14	-	10	uA
Output	Peak Blocking Current	IDRM	VDRM=600V	- 1	-	500	nA
	ON-State Voltage	Vтм	ITM=100mA	-	1.6	3	V
Tranfer charac- teristics	Holding Current	lΗ	The off		0.1	-	mΑ
	Critical rate of rise of OFF-state voltage	dV/dt	VDRM= $(1/\sqrt{2})$ *Rated	600		-	V/uS
		Riso	DC500V	5x10 ¹⁰	10 ¹¹	c1 -	Ohm
	Minimum trigger current	İFT	Main Terminal Voltage=3V	O_{Σ}	-	10	mA
	Turn-on time	Ton	VD=6V,RL=100Ohm,IF=20mA	-01	1	100	uS

DATE: 12/30/2011

cosmo

ELECTRONICS CORPORATION

Photocoupler:

KMOC3011

NO.60P47001

SHEET 4 OF 6

REV.

Fig.1 Forward Current vs.

Ambient Temperature




Fig.2 On-State Voltage vs.
Ambient Temperature




Fig.3 On-State R.M.S. Current vs. Ambient Temperature




Fig.4 Holding Current vs.

Ambient Temperature




Fig.5 Peak Forward Current vs. Duty Ratio





Fig.6 Forward Current vs. Forward Voltage



DATE: 12/30/2011

cosmo

ELECTRONICS CORPORATION

Photocoupler:

KMOC3011

NO.60P47001

REV.

SHEET 5 OF 6

Fig.7 Trigger Current vs.
Ambient Temperature





Fig.8 Leakage with LED off vs. Ambient Temperature



DATE: <u>12/30/2011</u>

cosmo

ELECTRONICS CORPORATION

Photocoupler:

KMOC3011

NO.60P47001

REV.

SHEET 6 OF 6

NOTICE

The information contained in this document is intended to be a general product description and is subject to change without notice. Please contact cosmo in order to obtain the latest device data sheets before using any cosmo device. cosmo does not assume any responsibility for use of any circuitry described. No circuit patent licenses are implied. This publication is the property of cosmo. No part of this publication may be reproduced or copied in any form or by any means, or transferred to any third party without the prior written consent of cosmo Electronics Corporation.

The devices listed in this document are designed for general applications only in electronic equipment. No devices shall be deployed which require higher level of reliability such as:

- Medical and other life support equipments.
- Space application.
- Telecommunication equipment (trunk lines).
- Nuclear power control equipment.

Unless it received prior written approval from cosmo.

cosmo takes no responsibility for damages arise form the improper usage of our device. Please contact cosmo for further information regarding the above notices.