


KONTEC Series P-100 Sensor Controller

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)


FEATURES

1	■ Broad Power Input Voltage Range Broad power input Voltage ranging from 100V to 240V AC/DC.	
2	■ Easy Use One touch switching to change output phase.	
3	■ Protection Circuit Built-in short-circuit protection circuit for 12V DC output.	4
		■ Timer Function available Selectable time functions include: On-delay, Off-delay, and One-shot switch are available for P-100D Type.

SPECIFICATIONS

Item	Model	General type P-100	Timer Built-in Type P-100D
Power Input Voltage		100-240V, AC/DC, 50/60Hz	
Power Consumption		< 3VA	
DC Power Output		12V ± 10%DC, 100mA max. with short-circuit protective circuit	
Output Capacity		Each controller for one photoelectric switch	
Control Output		One set output relay • Response time: 20milliseconds • Spot contacts Rate: 250V 3A. AC (resistive Load)	
Delay Time Function		None	On-delay, Off-delay &. One-shot
Power Indicator		Red LED used	
Operating Indicator		Red LED used, light on at output relay energized	
Housing Material		Gray ABS w/8 pin terminal block	

DIMENSIONS (in millimeter)

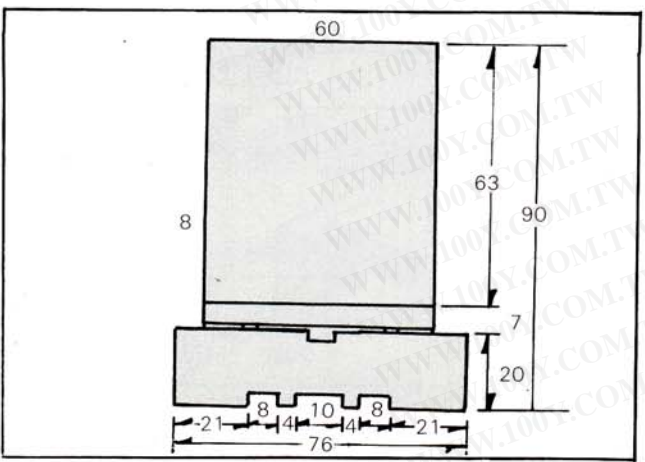

WIRING

