

New MOS FET Relay with Low Output Capacitance and ON Resistance ($C \times R = 10\text{pF} \cdot \Omega$) in a 40-V Load Voltage Model

- Output capacitance of 1 pF (typical) allows high-frequency applications.
- Leakage current of 1.0 nA max. when output relay is open.

Application Examples

- Semiconductor inspection tools
- Measurement devices
- Broadband systems
- Data loggers

List of Models

Contact form	Terminals	Load voltage (peak value)	Model	Number per stick	Number per tape
SPST-NO	Surface-mounting terminals	40 VAC	G3VM-41GR6	100	---
			G3VM-41GR6(TR)	---	2,500


Dimensions

Note: All units are in millimeters unless otherwise indicated.

G3VM-41GR6




Note: The actual product is marked differently from the image shown here.

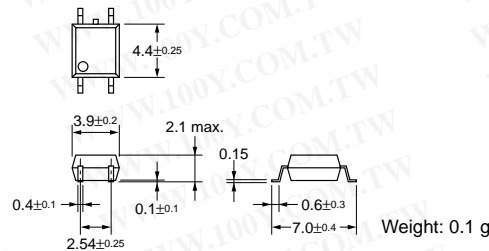


Terminal Arrangement/Internal Connections (Top View)

G3VM-41GR6



Actual Mounting Pad Dimensions (Recommended Value, Top View)

G3VM-41GR6



Absolute Maximum Ratings (Ta = 25°C)


Item		Symbol	Rating	Unit	Measurement Conditions
Input	LED forward current	I_F	50	mA	
	Repetitive peak LED forward current	I_{FP}	1	A	100 μs pulses, 100 pps
	LED forward current reduction rate	$\Delta I_F/^{\circ}\text{C}$	-0.5	mA/ $^{\circ}\text{C}$	Ta ≥ 25 $^{\circ}\text{C}$
	LED reverse voltage	V_R	5	V	
	Connection temperature	T_j	125	$^{\circ}\text{C}$	
Output	Output dielectric strength	V_{OFF}	40	V	
	Continuous load current	I_O	120	mA	
	ON current reduction rate	$\Delta I_{ON}/^{\circ}\text{C}$	-1.2	mA/ $^{\circ}\text{C}$	Ta ≥ 25 $^{\circ}\text{C}$
	Connection temperature	T_j	125	$^{\circ}\text{C}$	
Dielectric strength between input and output (See note 1.)		V_{I-O}	1,500	Vrms	AC for 1 min
Operating temperature		T_a	-20 to +85	$^{\circ}\text{C}$	With no icing or condensation
Storage temperature		T_{stg}	-55 to +125	$^{\circ}\text{C}$	With no icing or condensation
Soldering temperature (10 s)		---	260	$^{\circ}\text{C}$	10 s

Note: 1. The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

Electrical Characteristics (Ta = 25°C)

Item	Symbol	Minimum	Typical	Maximum	Unit	Measurement conditions
Input	LED forward voltage	V_F	1.0	1.15	1.3	V
	Reverse current	I_R	---	10	μA	$V_R = 5\text{ V}$
	Capacity between terminals	C_T	15	---	pF	$V = 0, f = 1\text{ MHz}$
	Trigger LED forward current	I_{FT}	---	4	mA	$I_O = 100\text{ mA}$
Output	Maximum resistance with output ON	R_{ON}	10	15	Ω	$I_F = 5\text{ mA}, I_O = 120\text{ mA}, t < 1\text{ s}$
	Current leakage when the relay is open	I_{LEAK}	---	1.0	nA	$V_{OFF} = 30\text{ V}, T_a = 50^\circ\text{C}$
	Capacity between terminals	C_{OFF}	1.0	2.0	pF	$V = 0, f = 100\text{ MHz}, t < 1\text{ s}$
Capacity between I/O terminals		C_{I-O}	0.8	---	pF	$f = 1\text{ MHz}, V_s = 0\text{ V}$
Insulation resistance		R_{I-O}	1,000	---	MΩ	$V_{I-O} = 500\text{ VDC}, \text{RoH} \leq 60\%$
Turn-ON time		t_{ON}	---	0.5	ms	$I_F = 10\text{ mA}, R_L = 200\text{ Ω}, V_{DD} = 20\text{ V}$ (See note 2.)
Turn-OFF time		t_{OFF}	---	0.5	ms	

Note: 2. Turn-ON and Turn-OFF Times



Recommended Operating Conditions


Use the G3VM under the following conditions so that the Relay will operate properly.

Item	Symbol	Minimum	Typical	Maximum	Unit
Output dielectric strength	V_{DD}	---	---	32	V
Operating LED forward current	I_F	10	---	30	mA
Continuous load current	I_O	---	---	120	mA
Operating temperature	T_a	25	---	60	°C

Engineering Data

Load Current vs. Ambient Temperature

G3VM-41GR6

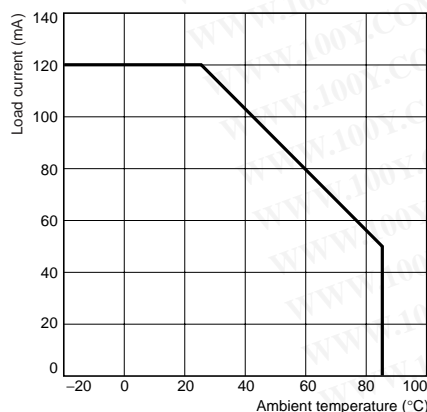

Safety Precautions

Refer to page 6 for precautions common to all G3VM models.

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)