

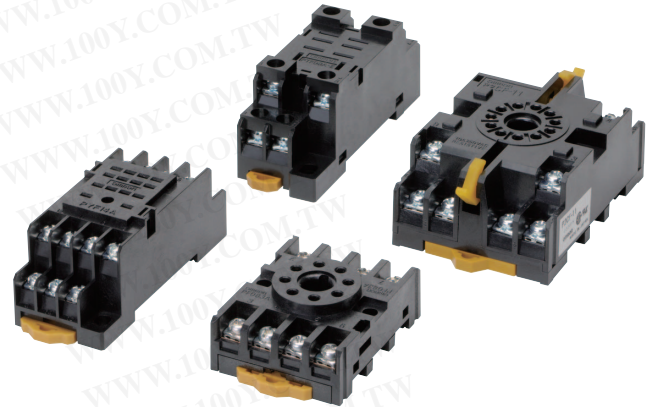
Common Sockets

CSM_common_sockets_DS_E_3_15

A Wide Variety of Square and Round Sockets in Front-mounting and Back-mounting Models

- Models available with finger protection.
- Hold-down Clips and Short Bars for PYFZ/PYF Sockets are also available.
- New screwless models available.














勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)



For the most recent information on models that have been certified for safety standards, refer to your OMRON website.

Ordering Information





















Square Sockets

Model	P2RF (front-mounting), page 8			P2R (back-mounting), pages 11 and 12			P7TF (front-mounting), page 12
Number of pins				Solder terminals	PCB terminals		
5 pins	P2RF-05 Approx. 27 g	P2RFZ-05-E Approx. 30 g	P2RF-05-E* Approx. 38 g	P2R-05A Approx. 5 g	P2R-05P Approx. 5 g	P2R-057P Approx. 5.5 g	P7TF-05 Approx. 28 g
							
8 pins	P2RF-08 Approx. 33 g	P2RFZ-08-E Approx. 38 g	P2RF-08-E* Approx. 38 g	P2R-08A Approx. 5 g	P2R-08P Approx. 5 g	P2R-087P Approx. 5.5 g	—
							

Note: 1. The structure of □-E models provides finger protection. Round terminals cannot be used. Use forked crimp terminals.

2. To remove the Relay, pull the lever on the Socket with your fingers supporting the lever and the opposite side of the Relay case, and jiggle the Relay.















* Use a #1 Phillips screwdriver to tighten the screws on this Socket.

Model Number of pins	PYF (front-mounting), pages 13 to 14		PY (back-mounting), pages 16 to 14				
			Solder terminals		Wrapping terminals		PCB terminals
8 pins	PYF08A Approx. 32 g	PYF08M Approx. 26 g	PY08 Approx. 8 g	PY08-Y1 PY08-Y3	PY08QN Approx. 12 g PY08QN2	PY08QN-Y1 PY08QN2-Y1	PY08-02 #2 Approx. 7.2 g
	 PYF08A-E #1	 PYFZ-08 Approx. 32 g					
11 pins	PYF11A Approx. 43 g		PY11 Approx. 9 g	PY11-Y1	PY11QN PY11QN2	PY11QN-Y1 PY11QN2-Y1	PY11-02 #2
							
14 pins	PYF14A Approx. 49 g	PYFZ-14 Approx. 50 g	PY14 Approx. 10 g	PY14-Y1 PY14-Y3	PY14QN Approx. 14 g PY14QN2	PY14QN-Y1 PY14QN2-Y1 PY14QN-Y3 PY14QN2-Y3	PY14-02 #2
	 PYF14A-E #1	 PYFZ-14-E #1 Approx. 50 g					

Note: The structure of □-E models provides finger protection. Round terminals cannot be used. Use forked crimp terminals.

*1. Use a #1 Phillips screwdriver to tighten the screws on this Socket.


*2. The structure does not resist flux. Manual soldering is recommended for this product.

Model Number of pins	PTF (front-mounting), pages 18 to 15		PT (back-mounting), pages 19 to 16		
			Solder terminals	Wrapping terminals	PCB terminals
8 pins	PTF08A Approx. 47 g 	PTF08A-E *1 	PT08 Approx. 11 g 	PT08QN Approx. 10.4 g 	PT08-0 *2 Approx. 8 g 
11 pins	PTF11A Approx. 61 g 		PT11 Approx. 13 g 	PT11QN 	PT11-0 *2 Approx. 12.2 g 
14 pins	PTF14A Approx. 77 g 	PTF14A-E *1 	PT14 Approx. 17 g 	PT14QN Approx. 20 g 	PT14-0 *2 Approx. 16.2 g 

Note: The structure of □-E models provides finger protection. Round terminals cannot be used. Use forked crimp terminals.



























* Use a #1 Phillips screwdriver to tighten the screws on this Socket.

* The structure does not resist flux. Manual soldering is recommended for this product.

Model Number of pins	P7LF (front-mounting), page 20
6 pins	P7LF-06 Approx. 60 g 


Note: Refer to *Models with Standards Certification* for detailed information on the models of Common Sockets that are certified for standards.

Round Sockets

Model Number of pins	PF (front-mounting), page 21	P2CF (front-mounting), page 22	PFA (front-mounting), page 23	P3G (back-mounting), page 24	PL (back-mounting), page 25		
					Solder terminals	Wrapping terminals	PCB terminals
8 pins	PF083A Approx. 34 g 	P2CF-08 Approx. 55 g 	8PFA Approx. 57 g 	P3G-08 Approx. 40 g 	PL08 Approx. 14 g 	PL08-Q Approx. 15 g 	PLE08-0 Approx. 10.6 g 
	PF083A-E * 	P2CF-08-E 	8PFA1 Approx. 66 g 	Note: The Y92A-48G Terminal Cover can be used to provide finger protection.			
	PF085A Approx. 40 g 						
11 pins	PF113A Approx. 47 g 	P2CF-11 Approx. 70 g 	11PFA Approx. 74 g 	P3GA-11 Approx. 47 g 	PL11 Approx. 15 g 	PL11-Q Approx. 18.5A 	PLE11-0 Approx. 10.8 g 
	PF113A-E * 	P2CF-11-E 		Note: The Y92A-48G Terminal Cover can be used to provide finger protection.			
14 pins	---	---	14PFA Approx. 104 g 	---	PL15 Approx. 28 g 	---	---
20 pins	---	---	---	---	PL20 Approx. 17 g 	---	---

Note: The structure of □-E models provides finger protection. Round terminals cannot be used. Use forked crimp terminals.
* Use a #1 Phillips screwdriver to tighten the screws on this Socket.

Terminal Cover

Model	Y92A-48G
Appearance	

Note: Refer to Models with Standards Certification for detailed information on the models of Common Sockets that are certified for standards.

Hold-down Clips For Square Sockets

(Unit: mm)

PKC One Set (2 Clips) 	PTC-1 	PYC-A1 Approx. 0.54 g One Set (2 Clips) 	PYC-A2 One Set (2 Clips) 	PYC-E1 One Set (2 Clips) 	PYC-P Approx. 1.4 g
PYC-P2 Approx. 1.2 g 	PYC-S Approx. 1.8 g 	PYC-1 Approx. 6 g 	PYC-2 	PYC-3 	PYC-5
PYC Approx. 0.2 g 	Y92H-1 	Y92H-3 One Set (2 Clips) 	Y92H-4 		

For Round Sockets

PFC-A1 Approx. 2.2 g One Set (2 Clips) 	PFC-A6 Approx. 2.4 g One Set (2 Clips) 	PFC-A7 Approx. 3.0 g One Set (2 Clips) 	PLC Approx. 2.4 g One Set (2 Clips) 	PLC-1 Approx. 2.6 g One Set (2 Clips) 	PLC-7 Approx. 3.0 g One Set (2 Clips)
PLC-8 Approx. 6.4 g One Set (2 Clips) 	PLC-10 Approx. 2.0 g One Set (2 Clips) 	PLC-12 Approx. 5.4 g One Set (2 Clips) 			

Applicable Hold-down Clips

For Square Sockets

Sockets Applicable models	PYFZ-□ PYF□A PTF□A	PYF08M	PY□(QN) PT□(QN)	PY□-02 PT□-0
MY□, MY□N, MY□-D, MY2□-CR, MY4□-CR, MY4Z□-CR, MY□-TU, MY2K, MY□N-D2, LY□, LY□N, LY□-TU, MYQ□, G3H(D) Series, G3F(D) Series, G3FM, and G9H	PYC-A1	PYC PYC-P	PYC-P PYC-S	PYC-P
MY□ * LY□		---	PYC-P2	
MY4H		---	PYC-P	
MY2Z□-CR MY3□-CR LY□-CR	Y92H-3	---	PYC-1	
G7K	PKC	---		
H3Y	Y92H-3	Y92H-4		

Note: The □ in the model number is replaced with 08, 11, or 14.

* If you use a Hold-down Clip with the MY2I, you cannot use the PYF08A.
Use the PYF14A.

For Round Sockets

Sockets Applicable models	PF083A PF113A	PL08 (-Q) PL11 (-Q)	PLE08-0 PLE11-0	P2CF-11
61F-03B, -04B	PFC-A1	PLC	PLC-10	---
61F-GP-N, -GPN-BT 61F-GP-N8 ?61F-APN2	PFC-N8	PHC-5		
MK2P Series, MK2KP, MK3P□(-US), and G3B(D) Series	PFC-A1	PLC		
MK3ZP MK3LP		PLC-1		
MYA-NA1, -NB1 MYA-LA1, -LB1 MYA-NA2, -NB2 MYA-LA2, -LB2	PFC-A6	PLC-7	---	---
MYA-LA12, -LB12	PFC-A7	PLC-8	---	---
APR-S	PFC-A6	PLC-7	---	---
APR-S380/-S440	---	---	---	Y92H-1
LG2	PFC-A7	PLC-8	---	---
K6EL	---	Y92H-1	---	---

Note: 1. The 8PFA(1), 11PFA, and 14PFA are held with hooks.

2. The PL15, PL20, and PF202, as well as models not given in the above table, require panel processing for installation.

3. The PF085A Hold-down Clip is included with the H3M and H2A. It is an option (sold separately) for the H2C.

Specifications

Socket Characteristics

Model	Continuous carry current	Dielectric strength	Insulation resistance*	Remarks
P2RFZ-05-E	10 A	Between contact terminals of same polarity: 1,000 VAC for 1 min Between coil and contact terminals: 4,000 VAC for 1 min	1,000 MΩ min.	
P2RFZ-08-E	5 A	Between contact terminals of different polarity: 3,000 VAC for 1 min Between contact terminals of same polarity: 1,000 VAC for 1 min Between coil and contact terminals: 4,000 VAC for 1 min	1,000 MΩ min.	
P2RF-05(-E)	10 A	Between contact terminals of same polarity: 1,000 VAC for 1 min Between coil and contact terminals: 4,000 VAC for 1 min	1,000 MΩ min.	
P2RF-08(-E)	5 A	Between contact terminals of different polarity: 3,000 VAC for 1 min Between contact terminals of same polarity: 1,000 VAC for 1 min Between coil and contact terminals: 4,000 VAC for 1 min	1,000 MΩ min.	
P2R-05P	10 A	Between contact terminals of same polarity: 1,000 VAC for 1 min Between coil and contact terminals: 4,000 VAC for 1 min	1,000 MΩ min.	
P2R-08P	5 A	Between contact terminals of different polarity: 3,000 VAC for 1 min Between contact terminals of same polarity: 1,000 VAC for 1 min Between coil and contact terminals: 4,000 VAC for 1 min	1,000 MΩ min.	
P2R-057P	10 A	Between contact terminals of same polarity: 1,000 VAC for 1 min Between coil and contact terminals: 5,000 VAC for 1 min	1,000 MΩ min.	
P2R-087P	5 A	Between contact terminals of different polarity: 3,000 VAC for 1 min Between contact terminals of same polarity: 1,000 VAC for 1 min Between coil and contact terminals: 5,000 VAC for 1 min	1,000 MΩ min.	
P2R-05A	10 A	Between contact terminals of same polarity: 1,000 VAC for 1 min Between ground terminals: 1,500 VAC for 1 min Between coil and contact terminals: 4,000 VAC for 1 min	1,000 MΩ min.	
P2R-08A	5 A	Between contact terminals of different polarity: 3,000 VAC for 1 min Between contact terminals of same polarity: 1,000 VAC for 1 min Between ground terminals: 1,500 VAC for 1 min Between coil and contact terminals: 4,000 VAC for 1 min	1,000 MΩ min.	
P7TF-05	5 A	Between terminals: 2,000 VAC for 1 min	1,000 MΩ min.	
PYFZ-08(-E)	10 A	Between contact terminals of different polarity: 2,250 VAC for 1 min Between contact terminals of same polarity: 2,250 VAC for 1 min Between coil and contact terminals: 2,250 VAC for 1 min	1,000 MΩ min.	
PYF08A(-E)	7 A	Between terminals: 2,000 VAC for 1 min	1,000 MΩ min.	The continuous carry current of 10 A for the PYF08S is for an ambient temperature of 55°C. At an ambient temperature of 70°C, the value is 7 A.
PYF11A	5 A	Between terminals: 2,000 VAC for 1 min	1,000 MΩ min.	
PYFZ-14(-E)	6 A	Between contact terminals of different polarity: 2,250 VAC for 1 min Between contact terminals of same polarity: 2,250 VAC for 1 min Between coil and contact terminals: 2,250 VAC for 1 min	1,000 MΩ min.	
PYF14A(-E)	3 A	Between terminals: 2,000 VAC for 1 min	1,000 MΩ min.	
PY08(-Y1)(-Y3)	7 A	Between terminals: 1,500 VAC for 1 min	1,000 MΩ min.	
PY08QN(-Y1)	7 A	Between terminals: 1,500 VAC for 1 min	100 MΩ min.	
PY08-02	7 A	Between terminals: 1,500 VAC for 1 min	100 MΩ min.	
PY11(-Y1)	5 A	Between terminals: 1,500 VAC for 1 min	100 MΩ min.	
PY11QN(-Y1)	5 A	Between terminals: 1,500 VAC for 1 min	100 MΩ min.	
PY11-02	5 A	Between terminals: 1,500 VAC for 1 min	100 MΩ min.	
PY14(-Y1)(-Y3)	3 A	Between terminals: 1,500 VAC for 1 min	100 MΩ min.	
PY14QN(-Y1)	3 A	Between terminals: 1,500 VAC for 1 min	100 MΩ min.	
PY14-02	3 A	Between terminals: 1,500 VAC for 1 min	100 MΩ min.	
PTF□□A(-E)	10 A	Between terminals: 2,000 VAC for 1 min	100 MΩ min.	
PT□□	10 A	Between terminals: 2,000 VAC for 1 min	100 MΩ min.	
PT□□QN	10 A	Between terminals: 2,000 VAC for 1 min	100 MΩ min.	
PT□□-0	10 A	Between terminals: 2,000 VAC for 1 min	100 MΩ min.	
P7LF-06	30 A	Between contact terminals of different polarity: 2,000 VAC for 1 min Between contact terminals of same polarity: 2,000 VAC for 1 min Between coil and contact terminals: 4,000 VAC for 1 min	1,000 MΩ min.	
PF□□□A(-E)	5 A	Between terminals: 2,000 VAC for 1 min	1,000 MΩ min.	
P2CF-□(-E)	5 A	Between terminals: 2,000 VAC for 1 min	1,000 MΩ min.	
8PFA(1)	10 A	Between terminals: 2,000 VAC for 1 min	1,000 MΩ min.	
11PFA(1)	10 A	Between terminals: 2,000 VAC for 1 min	1,000 MΩ min.	
P3G(A)-□	6 A	Between terminals: 2,000 VAC for 1 min	1,000 MΩ min.	
PL□(-Q)	10 A	Between terminals: 2,000 VAC for 1 min	1,000 MΩ min.	
PLE□□-0	10 A	Between terminals: 2,000 VAC for 1 min	1,000 MΩ min.	

*The insulation resistance was measured with a 500-VDC insulation resistance meter at the same places as those used for measuring the dielectric strength.

Safety Precautions

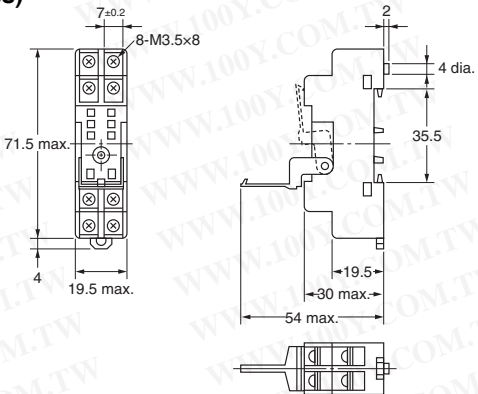


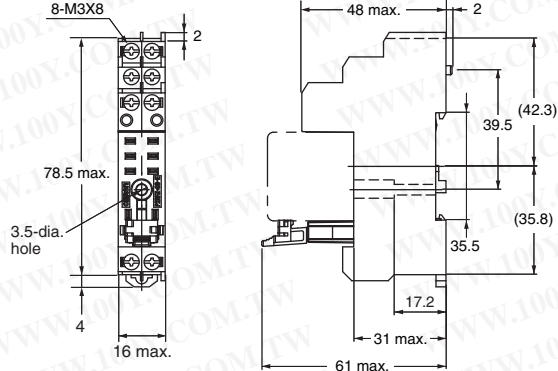

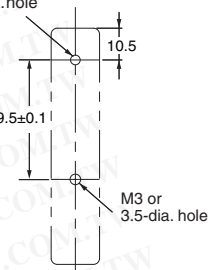
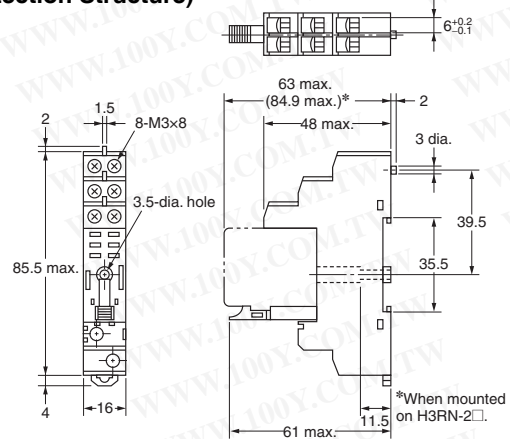


Refer to *Common Relay Precautions* for general precautions.

Dimensions

P2RF

(Unit: mm)


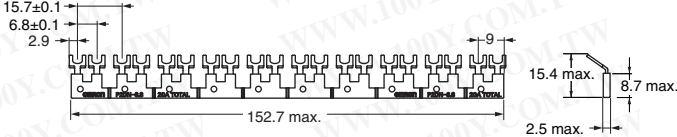

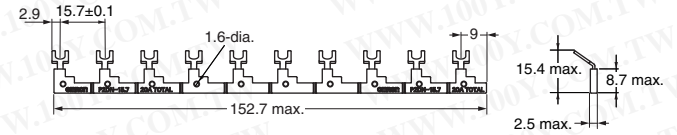
Dimensions	Terminal Arrangement/ Internal Connections	Mounting Hole Dimensions
P2RF-05 (One Pole)	<p>(Top View)</p>	<p>(Top View)</p> <p>Note: Track mounting is also possible.</p>
P2RFZ-05-E (One Pole) (Finger Protection Structure)	<p>(Top View)</p>	<p>(Top View)</p> <p>Note: Track mounting is also possible.</p>
P2RF-05-E (One Pole) (Finger Protection Structure)	<p>(Top View)</p> <p>Note: Figures in parentheses indicate DIN standard numbers.</p>	<p>(Top View)</p> <p>Note: Track mounting is also possible.</p>

Dimensions	Terminal Arrangement/ Internal Connections	Mounting Hole Dimensions
P2RF-08 (Two Poles)  <p>7\pm0.2 8-M3.5\times8 71.5 max. 4 19.5 max. 2 4 dia. 35.5 19.5 30 max. 54 max.</p>	 <p>(Top View)</p>	 <p>(Top View)</p> <p>Note: Track mounting is also possible.</p>
P2RFZ-08-E (Two Poles) (Finger Protection Structure)  <p>8-M3\times8 2 78.5 max. 3.5-dia. hole 4 16 max. 48 max. 2 39.5 (42.3) 35.5 (35.8) 17.2 31 max. 61 max.</p>	 <p>(Top View)</p>	 <p>(Top View)</p> <p>Note: Track mounting is also possible.</p>
P2RF-08-E (Two Poles) (Finger Protection Structure)  <p>6\pm0.2 63 max. (84.9 max.)* 48 max. 2 3 dia. 39.5 35.5 11.5 61 max. 85.5 max. 2 1.5 8-M3\times8 3.5-dia. hole 4 16 *When mounted on H3RN-2□.</p>	 <p>(Top View)</p> <p>Note: Figures in parentheses indicate DIN standard numbers.</p>	 <p>(Top View)</p> <p>Note: Track mounting is also possible.</p>

Note: If an I/O SSR or Indicator Module is used, the polarity of terminal 1 is negative.

Accessories for Screw Terminal Sockets (P2RFZ-□-E)


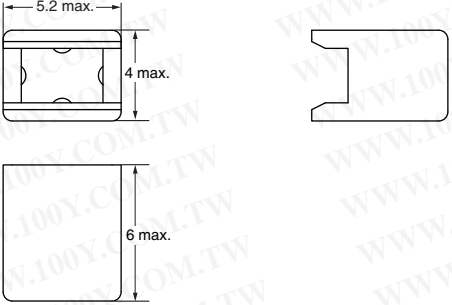
Short Bars

Pitch	Applicable models	Appearance	Dimensions (mm)	Model	Maximum carry current
6.8 mm	P2RFZ-05-E P2RFZ-08-E		 15.7±0.1 6.8±0.1 2.9 152.7 max. 9 15.4 max. 8.7 max. 2.5 max.	P2DN-6.8-100S	20 A
15.7 mm			 2.9 15.7±0.1 1.6-dia. 152.7 max. 9 15.4 max. 8.7 max. 2.5 max.	P2DN-15.7-100S	

Note: Each Short Bar set comes with 20 Caps.

Accessories for Short Bars (P2DN)

Cap

Applicable models	Appearance	Dimensions (mm)	Model
P2RFZ-05-E P2RFZ-08-E		 5.2 max. 4 max. 6 max.	P2DN-CP100

P2R

(Unit: mm)

Dimensions	Terminal Arrangement/ Internal Connections	PCB Dimensions
P2R-05P (One Pole)	<p>(Bottom View)</p>	<p>(Bottom View)</p>
P2R-08P (Two Poles)	<p>(Bottom View)</p>	<p>(Bottom View)</p>
P2R-057P (One Pole)	<p>(Bottom View)</p>	<p>(Bottom View)</p>
P2R-087P (Two Poles)	<p>(Bottom View)</p>	<p>(Bottom View)</p>

Note: If an I/O SSR or Indicator Module is used, the polarity of terminal 1 is negative.

P2R

(Unit: mm)

Dimensions	Terminal Arrangement/ Internal Connections	Mounting Hole Dimensions
P2R-05A (One Pole)	<p>(Bottom View)</p>	<p>(Use panel with thickness of 1.6 to 2.0 mm.)</p>
P2R-08A (Two Poles)	<p>(Bottom View)</p>	<p>(Use panel with thickness of 1.6 to 2.0 mm.)</p>

Note: If an I/O SSR or Indicator Module is used, the polarity of terminal 1 is negative.

P7TF

(Unit: mm)

Dimensions	Terminal Arrangement/ Internal Connections	Mounting Hole Dimensions
P7TF-05	<p>(Top View)</p>	<p>(Top View)</p> <p>Note: Track mounting is also possible. * We recommend that you use washers if you use M3 bolts or screws. Washers are not required with M4 bolts or screws.</p>

Note: If an I/O SSR or Indicator Module is used, the polarity of terminal 1 is positive.

PYFZ/PYF

(Unit: mm)

Dimensions		Terminal Arrangement/Internal Connections	Mounting Hole Dimensions
PYFZ-14 		 (Top View)	 (Top View) Note: Track mounting is also possible.
PYFZ-14-E (Finger Protection Structure) 			
PYF14A 		 (Top View)	 (Top View) Note: Track mounting is also possible.
PYF14A-E (Finger Protection Structure) 			




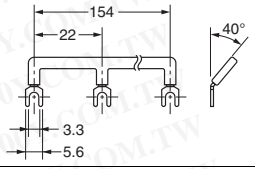



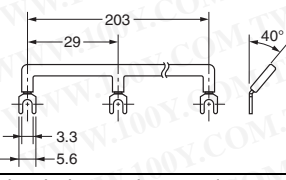
Relay Sockets and Short Bars for PYFZ/PYF

Bridges within the Same Socket

Pitch	Applicable models	Appearance	Dimensions (mm)	Model	Specifications
7 mm	PYFZ-14 PYF14A			PYD-020B□(2P)	Max. carry current: 20 A (18 A at 70°C) Ambient operating temperature: -40 to 70°C (with no icing or condensation) Ambient operating humidity: 45% to 85% (with no icing or condensation) Conductor material: Brass Conductor surface treatment: Nickel plating Package qty: 50/bag
				PYD-030B□(3P)	


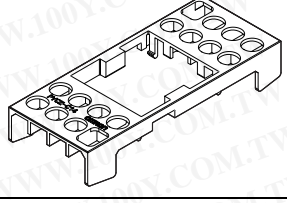
Note: The □ in the model number is replaced with the insulation color specification code. B: Black, Y: Yellow

Bridges between Adjacent Sockets

Pitch	Applicable models	Appearance	Dimensions (mm)	Model	Specifications
22 mm	PYFZ-08 PYF08A			PYD-025B□(2P)	Max. carry current: 20 A (18 A at 70°C) Ambient operating temperature: -40 to 70°C (with no icing or condensation) Ambient operating humidity: 45% to 85% (with no icing or condensation) Conductor material: Brass Conductor surface treatment: Nickel plating Package qty: 10/bag
				PYD-085B□(8P)	
29 mm	PYFZ-14 PYF14A			PYD-026B□(2P)	Max. carry current: 20 A (18 A at 70°C) Ambient operating temperature: -40 to 70°C (with no icing or condensation) Ambient operating humidity: 45% to 85% (with no icing or condensation) Conductor material: Brass Conductor surface treatment: Nickel plating Package qty: 10/bag
				PYD-086B□(8P)	

Note: The □ in the model number is replaced with the insulation color specification code. B: Black, S: Blue, R: Red

Terminal Covers for PYFZ-08/PYFZ-14

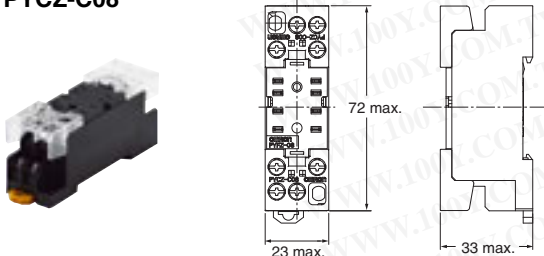
Applicable models	Appearance	Model
PYFZ-08		PYCZ-C08 (2 pcs/set)
PYFZ-14		PYCZ-C14 (1 pcs/set)

Note: These covers cannot be used for PYF08A and PYF14A.
Use these covers in a combination with PYFZ-08 and PYFZ-14.

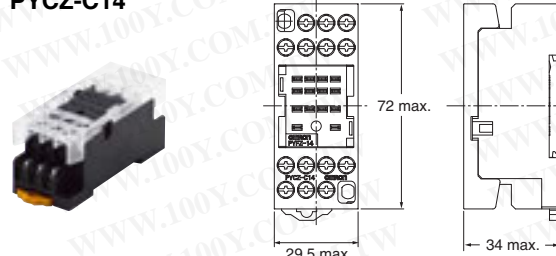
Dimensions with terminal cover

(Unit: mm)

PYCZ-C08

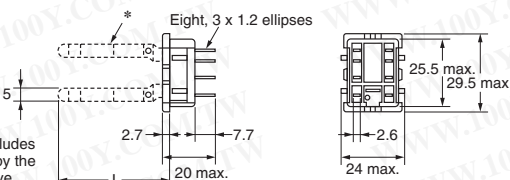

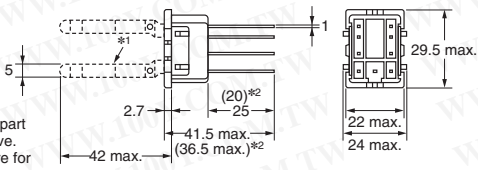

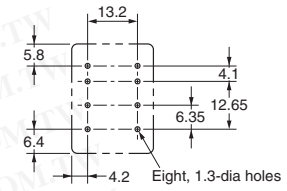
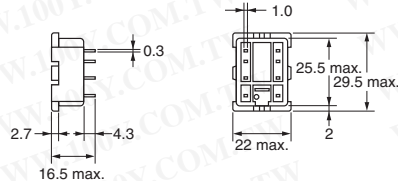
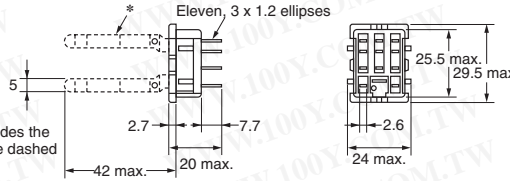

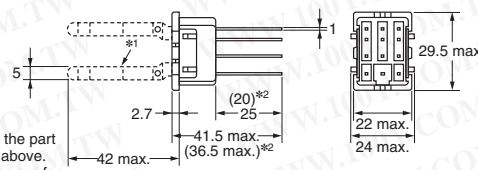

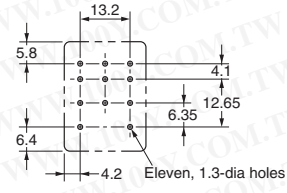
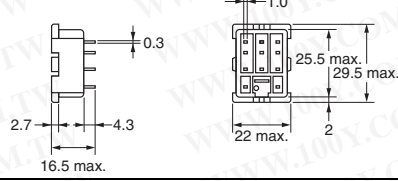


PYCZ-C14



PY

(Unit: mm)

Dimensions	Terminal Arrangement/ Internal Connections	Mounting hole and PCB dimensions
PY08 PY08-Y1 (L = 42 max.) PY08-Y13 (L = 60 max.)  <p>*The PY08-Y1 includes the part outlined by the dashed lines above.</p>		
PY08QN PY08QN2 PY08QN-Y1 PY08QN2-Y1  <p>*1. The PY08QN(2)-Y1 includes the part outlined by the dashed lines above. *2. The figures in the parentheses are for the PY08QN2(-Y1).</p>	 (Bottom View)	
PY08-02 <p>* The structure does not resist flux. Manual soldering is recommended for this product.</p> 		
PY11 PY11-Y1  <p>*The PY11-Y1 includes the part outlined by the dashed lines above.</p>		
PY11QN PY11QN2 PY11QN-Y1 PY11QN2-Y1  <p>*1. The PY11QN(2)-Y1 includes the part outlined by the dashed lines above. *2. The figures in the parentheses are for the PY11QN2(-Y1).</p>	 (Bottom View)	
PY11-02 <p>* The structure does not resist flux. Manual soldering is recommended for this product.</p> 		

Dimensions	Terminal Arrangement/ Internal Connections	Mounting hole and PCB dimensions
<p>PY14 PY14-Y1 (L = 42 max.) PY14-Y3 (L = 60 max.)</p> <p>*The PY14-Y□ includes the part outlined by the dashed lines above.</p>		
<p>PY14QN PY14QN2 PY14QN-Y1 (L = 42 max.) PY14QN2-Y1 (L = 42 max.) PY14QN-Y3 (L = 60 max.) PY14QN2-Y3 (L = 60 max.)</p> <p>*1. The PY14QN-Y□ and PY14QN2-Y□ include the part outlined by the dashed lines above. *2. The figures in the parentheses are for the PY14QN2(-Y□).</p>	<p>(Bottom View)</p>	
<p>PY14-02</p> <p>* The structure does not resist flux. Manual soldering is recommended for this product.</p>		

- Note:**
1. Use a panel with a thickness of 1 to 2 mm when mounting a Socket on it.
 2. You can use the PY14-Y1 or PY14QN-Y1 for the MY4 Series, MY4H, MYQ4(Z), or MY2K.
 3. You can use the PY14-Y3 or PY14QN-Y3 for H3Y Timers.

PTF

(Unit: mm)



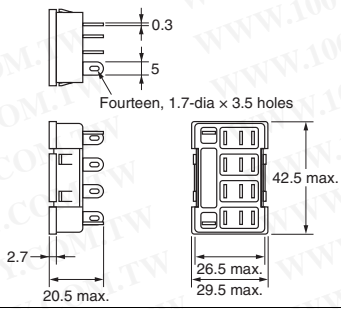
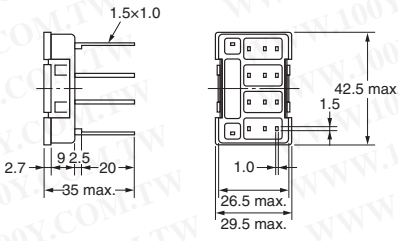
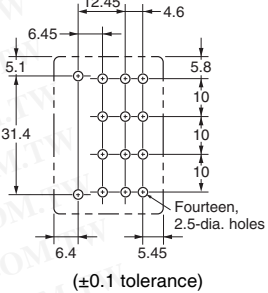
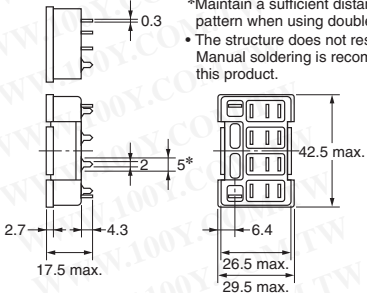
Dimensions	Terminal Arrangement/ Internal Connections	Mounting Hole Dimensions
PTF08A 	<p>(Top View)</p>	<p>(Top View)</p> <p>Note: Track mounting is also possible.</p>
PTF08A-E (Finger Protection Structure) 	<p>(Top View)</p>	<p>(Top View)</p> <p>Note: Track mounting is also possible.</p>
PTF11A 	<p>(Top View)</p>	<p>(Top View)</p> <p>Note: Track mounting is also possible.</p>
PTF14A 	<p>(Top View)</p>	<p>(Top View)</p> <p>Note: Track mounting is also possible.</p>
PTF14A-E (Finger Protection Structure) 	<p>(Top View)</p>	<p>(Top View)</p> <p>Note: Track mounting is also possible.</p>

Note: If you use the PTF08A, PTF08A-E, or PT08 with an LY1 Relay, connect the following terminal pairs: 1-2, 3-4, and 5-6 (for usage at 10 A or higher).

PT

(Unit: mm)

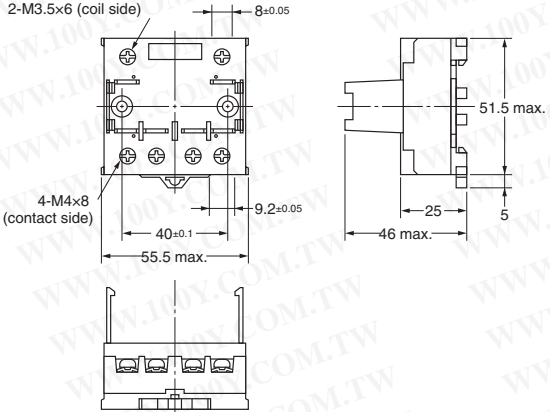


Dimensions		Terminal Arrangement/ Internal Connections	Mounting hole and PCB dimensions
PT08 	PT08QN 	 (Bottom View)	
	PT08-0 		
PT11 	PT11QN 	 (Bottom View)	
	PT11-0 		

Dimensions		Terminal Arrangement/ Internal Connections	Mounting hole and PCB dimensions
PT14	PT14QN	 (Bottom View)	
			 (±0.1 tolerance)
PT14-0  <div>*Maintain a sufficient distance from the pattern when using double-sided PCBs. • The structure does not resist flux. Manual soldering is recommended for this product.</div>			

Note: Use a panel with a thickness of 1 to 2 mm when mounting a Socket on it.

P7LF

(Unit: mm)

Dimensions	Terminal Arrangement/ Internal Connections	Mounting Hole Dimensions
P7LF-06 	 (Top View)	

PF

(Unit: mm)

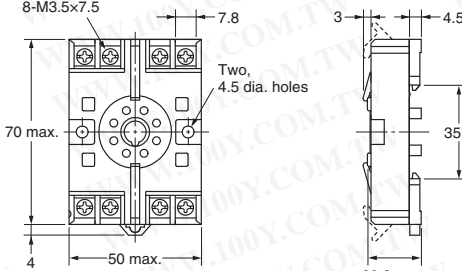


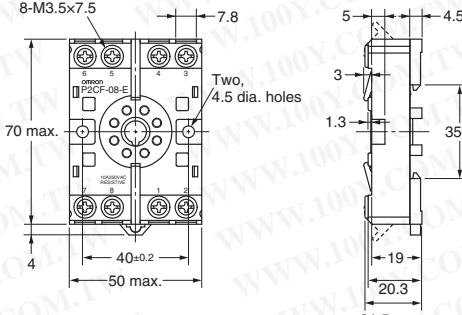

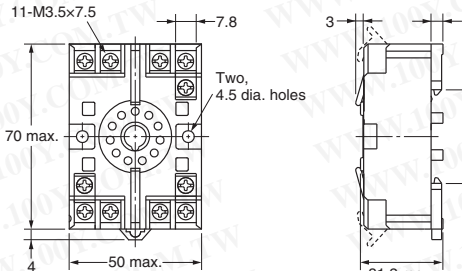


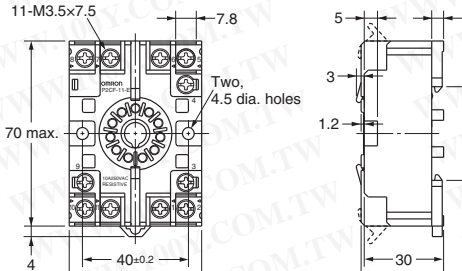

Dimensions	Terminal Arrangement/ Internal Connections	Mounting Hole Dimensions
PF083A 		
PF083A-E 	 (Top View)	 Note: Track mounting is also possible.
PF085A 	 (Top View)	
PF113A 		
PF113A-E 	 (Top View)	 Note: Track mounting is also possible.

Note: 1. For the PF083A and PF113A, the Socket key slot is on the top. (Applicable model: MK)

2. The structure of □-E models provides finger protection. Round terminals cannot be used. Use forked crimp terminals.

P2CF

(Unit: mm)

Dimensions	Terminal Arrangement/ Internal Connections	Mounting Hole Dimensions
<p>P2CF-08</p> 	 <p>(Top View)</p>	 <p>Two M4 or 4.5-dia. holes 40±0.2</p>
<p>P2CF-08-E</p> 	 <p>(Top View)</p>	<p>Note: Track mounting is also possible.</p>
<p>P2CF-11</p> 	 <p>(Top View)</p>	 <p>Two M4 or 4.5-dia. holes 40±0.2</p>
<p>P2CF-11-E</p> 	 <p>(Top View)</p>	<p>Note: Track mounting is also possible.</p>

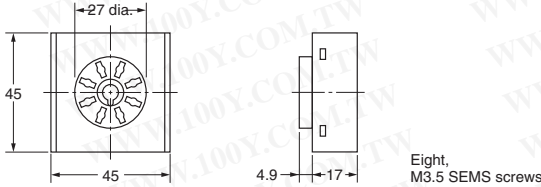

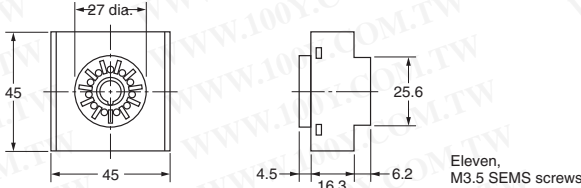

PFA

(Unit: mm)

Dimensions	Terminal Arrangement/ Internal Connections	Mounting Hole Dimensions
8PFA 	 (Top View)	 Note: Track mounting is also possible.
8PFA1 	 (Top View)	 Note: Track mounting is also possible.
11PFA 	 (Top View)	 Note: Track mounting is also possible.
14PFA 	 (Top View)	 Note: Track mounting is also possible.


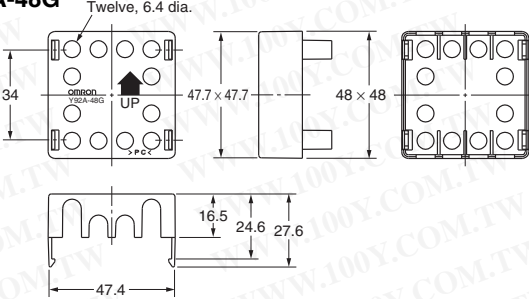
P3G/P3GA

(Unit: mm)

Dimensions	Terminal Arrangement/ Internal Connections	Mounting Hole Dimensions
P3G-08  <p>Note: The Y92A-48G Terminal Cover can be used to implement finger protection.</p>	 <p>(Bottom View)</p>	---
P3GA-11  <p>Note: The Y92A-48G Terminal Cover can be used to implement finger protection.</p>	 <p>(Bottom View)</p>	---

Terminal Cover

(Unit: mm)

Appearance	Dimensions
	Y92A-48G 

PL

(Unit: mm)

Dimensions	Terminal Arrangement/ Internal Connections	Mounting hole and PCB dimensions (bottom view)
PL08 		<p>Two, 3.5 dia. or M3 device mounting holes</p> <p>Two, 3.5 or M3 Socket mounting holes</p> <p>L = 40 mm MK2(Z)P L = 74 mm PU, AMD-S, MM2(X)P, CZ, STP, H3L, TDS, DTS, DSP, TDF, TDV L = 86 mm 61F-GP/-APN, G4Q-212S, RD2P, RDA, TDA, AGF, SE, SAD, K2CU, SDV-F</p>
PL08-Q 	 (Bottom View)	<p>Two 3.5-dia. or two M3 Socket mounting holes</p> <p>MK2(Z)P</p>
PLE08-0 		<p>Two 3.5-dia. Hold-down Clip mounting holes</p> <p>MK2(Z)P</p>
PL11 		<p>Two, 3.5 dia. or M3 device mounting /Hold-down Clip mounting holes</p> <p>Two, 3.5 dia. or M3 Socket mounting holes</p> <p>L = 40 mm MK3P MK2KP L = 74 mm MM3P MK2(X)KP</p>
PL11-Q 	 (Bottom View)	<p>L = 42 mm MK3ZP MK3LP</p>
PLE11-0 		<p>Two, 3.5-dia. holes Applicable model/Hold-down Clip mounting holes</p> <p>L = 40 mm MK3P MK2KP L = 42 mm MK3ZP MK3LP</p>
PL15 	 (Bottom View)	<p>Two, 3.5 dia. or M3 device mounting holes</p> <p>Two, 3.5 dia. or M3 Socket mounting holes</p> <p>MM3XP MM4(X)P MM3(X)KP MM4(X)KP</p>

Dimensions	Terminal Arrangement/ Internal Connections	Mounting hole and PCB dimensions (bottom view)
PL20 	<p>(Bottom View)</p>	<p>* Relay mounting holes are not required for the LDNP.</p>

Note: When mounting, pay due attention to the direction of the key groove of applicable Relays.

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)