



- **1 A** switching at up to **40 W**, carrying **3 A**
- Highest quality instrumentation grade switches
- Small size
- Internal mu-metal magnetic screen
- One or two switches in a single package
- **Form A** (energise to make) or **Form B** (energise to break) configurations
- **3, 5, 12** or **24 V** coils with optional internal diode
- **Additional build options are available**
- Many benefits compared to industry standard relays **(see last page)**
- Suitable for high power applications and in many cases, may be used as an alternative to mercury wetted reed relays

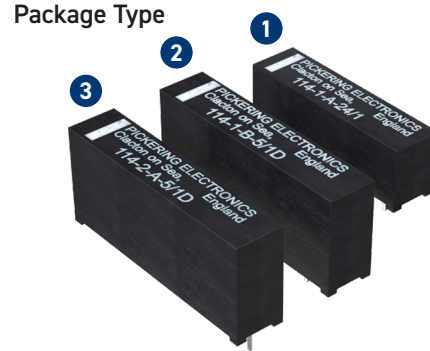

Unusually for high power relays, the Series 114 feature sputtered ruthenium contacts instead of the more common electroplated rhodium or tungsten types. This also makes them suitable for low level or "dry" switching. They are able to switch a.c. mains voltages so are suitable for interfacing to larger electromechanical relays or contactors. It is important however, to suppress back EMFs from inductive loads. This is achievable by using an RC snubber, varistor or similar voltage limiting device.

The range features an internal mu-metal screen to minimize problems that would otherwise be experienced due to magnetic interaction when they are closely stacked. Form A versions may be stacked side-by-side. Due to the fact that the Form B types feature an internal biasing magnet, a gap of 0.4 inches minimum should be left between adjacent relays.

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

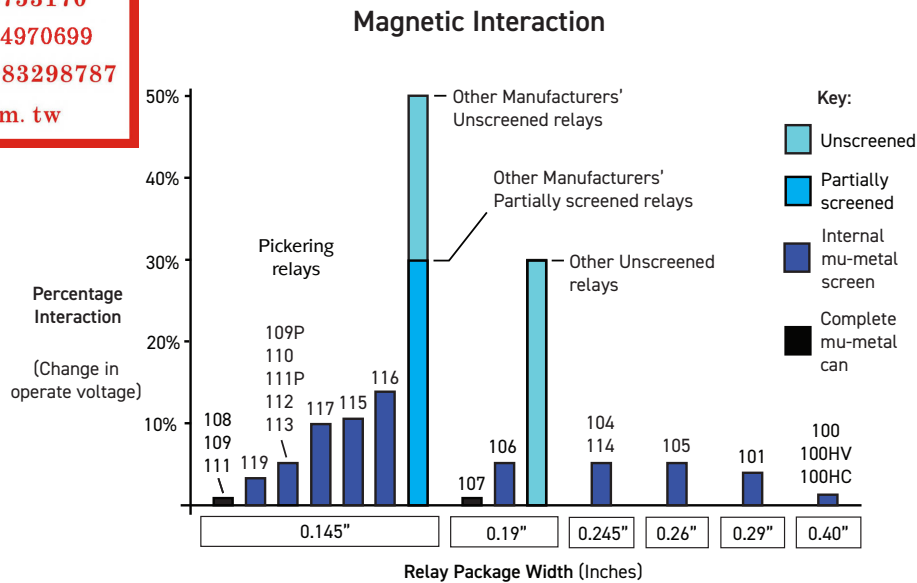

This chart demonstrates the percentage changes in operate voltage due to magnetic interaction depending on the level of magnetic screening offered from the relay package. For more information on magnetic interaction [click here](#).

## Switch Ratings - Dry Switches

1 Form A (energise to make)	1 Form B (energise to break)	2 Form A (energise to make)
200 VDC or 240VAC at 40 W 500 V min stand-off	200 VDC or 240VAC at 40 W 500 V min stand-off	200 VDC or 240VAC at 40 W 500 V min stand-off

### Series 114 switch ratings - contact ratings for each switch type

Switch No	Switch form	Power rating	Max. switch current	Max. carry current	Max. switching volts	Min. stand-off volts	Life expectancy ops typical (see Note <sup>1</sup> )	Operate time inc bounce (max)	Release time	Special features
1	A or B	40 W	1.0 A	3.0 A	200 V DC 240 V AC RMS	500	10 <sup>8</sup>	1.0 ms	0.5 ms	General purpose

#### Note<sup>1</sup>: Life Expectancy

The life of a reed relay depends upon the switch load and end of life criteria. For example, for an 'end of life' contact resistance specification of 1 Ω, switching low loads (10 V at 10 mA resistive) or when 'cold' switching, typical life is approx 1 x 10<sup>9</sup> ops. At the maximum load (resistive), typical life is 10 x 10<sup>7</sup> ops. In the event of abusive conditions, e.g. high currents due to capacitive inrushes, this figure reduces considerably. Pickering will be pleased to perform life testing with any particular load condition.

### Operating Voltages

Coil voltage - nominal	Must operate voltage - maximum at 25°C	Must release voltage - minimum at 25°C
3V	2.25 V	0.3 V
5V	3.75 V	0.5 V
12V	9 V	1.2 V
24V	18 V	2.4 V

### Environmental Specification/Mechanical Characteristics

In the table below, the upper temperature limit can be extended to +125 °C if the coil drive voltage is increased to accommodate the resistance/temperature coefficient of the copper coil winding. This is approximately 0.4% per °C. This means that at 125 °C the coil drive voltage will need to be increased by approximately 40 x 0.4 =16% to maintain the required magnetic drive level. Please contact [sales@pickeringrelay.com](mailto:sales@pickeringrelay.com) for assistance.

Operating Temperature Range	-20 °C to +85 °C
Storage Temperature Range	-35 °C to +100 °C
Shock Resistance	50 g
Vibration Resistance (10 - 2000 Hz)	20 g
Soldering Temperature (max) (10 s max)	270 °C
Washability (Proper drying process is recommended)	Fully Sealed

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

### Dry Relay: Series 114 Coil data and type numbers

Device Type	Type Number	Coil (V)	Coil resistance	Max. contact resistance (initial)	Insulation resistance (minimum at 25 °C) (see Note <sup>4</sup> )		Capacitance (typical) (see Note <sup>2</sup> )	
					Switch to coil	Across switch	Closed switch to coil	Across open switch
1 Form A, Switch No. 1 Package Type 1	114-1-A-3/1D	3	75 Ω	0.15 Ω	10 <sup>12</sup> Ω	10 <sup>12</sup> Ω	2.0 pF	0.1 pF
	114-1-A-5/1D	5	250 Ω					
	114-1-A-12/1D	12	750 Ω					
	114-1-A-24/1D	24	2000 Ω					
1 Form B Switch No. 1 Package Type 2	114-1-B-5/1D	5	350 Ω	0.20 Ω	10 <sup>12</sup> Ω	10 <sup>12</sup> Ω	2.0 pF	0.1 pF
	114-1-B-12/1D	12	1000 Ω					
	114-1-B-24/1D	24	2200 Ω					
2 Form A Switch No. 1 Package Type 3	114-2-A-5/1D	5	150 Ω	0.25 Ω	10 <sup>12</sup> Ω	10 <sup>12</sup> Ω	See Note <sup>3</sup>	See Note <sup>3</sup>
	114-2-A-12/1D	12	350 Ω					
	114-2-A-24/1D	24	1000 Ω					

When an internal diode is required, the suffix D is added to the part number as shown in the table.

#### Note<sup>2</sup>: Capacitance across open switch

The capacitance across the open switch was measured with other connections guarded.

#### Note<sup>3</sup>: Capacitance values

The value will depend upon on the mode of connection/guarding of unused terminals. Please contact technical sales for details.

#### Note<sup>4</sup>: Insulation resistance

Insulation resistance will reduce at higher temperatures. For more information on temperature effects **click here**, or **contact Pickering** for more in depth guidance.


The technical information shown in this data sheet could contain inaccuracies or typographical errors. This information may be periodically changed or updated and these changes will be included in future versions of this data sheet.

For different values, latest specifications and product details, please contact your local Pickering sales office.

For **FREE** evaluation samples go to: [pickeringrelay.com/samples](http://pickeringrelay.com/samples)

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

### Pin Configuration and Dimensional Data (dimensions in inches, millimeters in brackets)

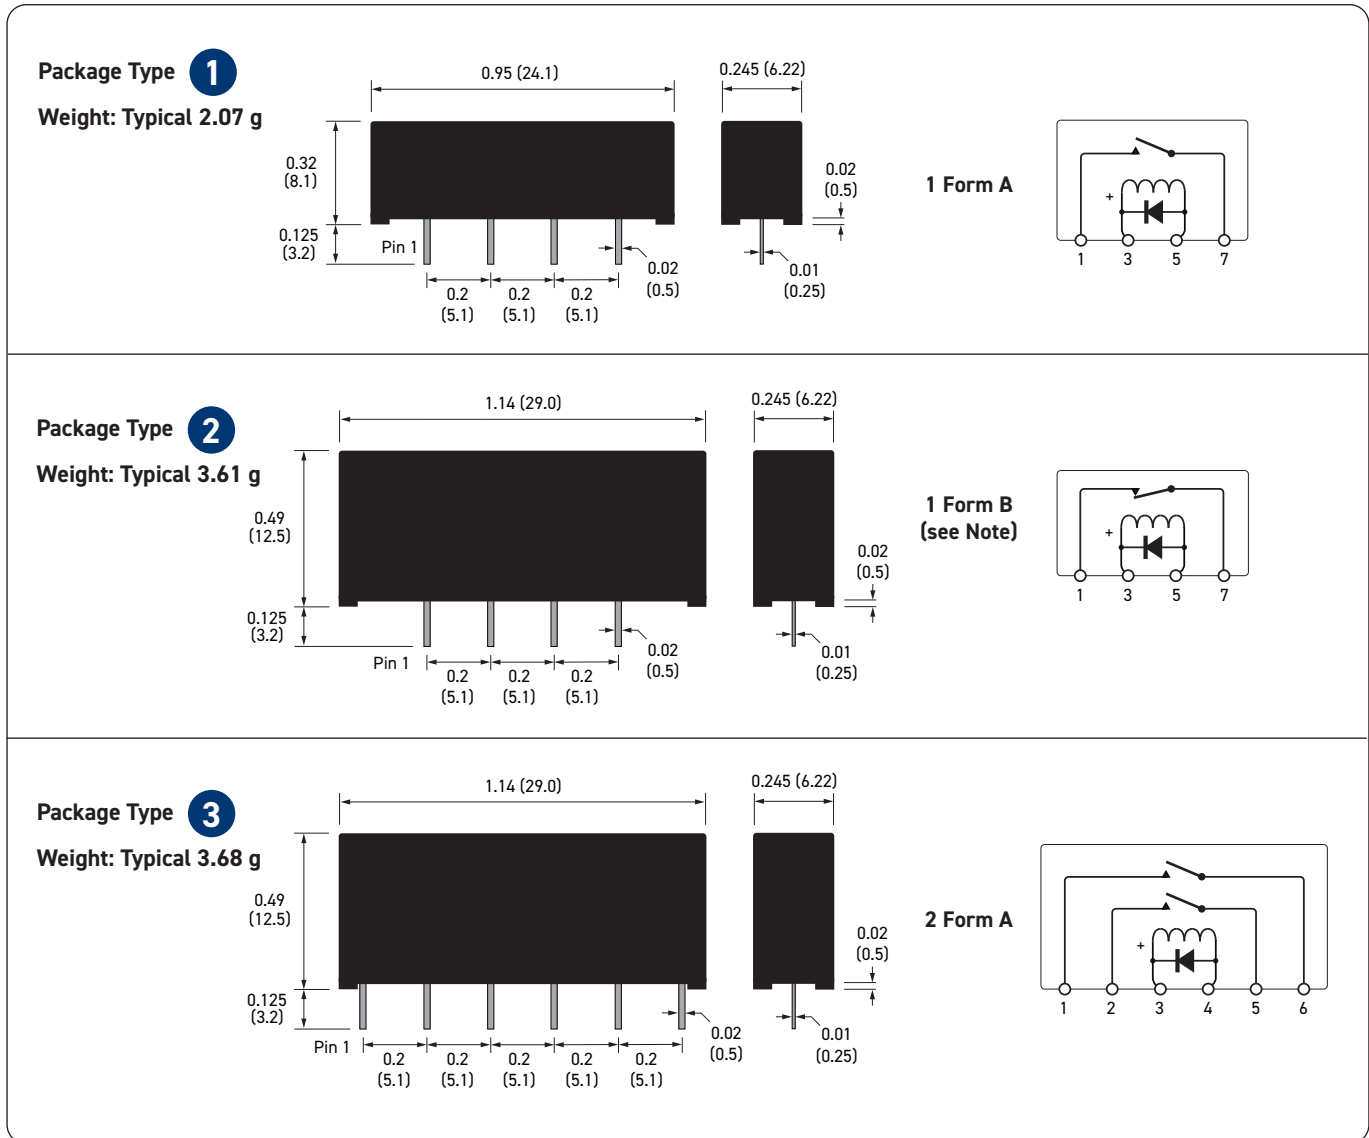







**Important:** Where the optional internal diode is fitted or for all Form B types, the correct coil polarity must be observed, as shown by the + symbol on the schematics.

Due to the presence of an internal biasing magnet, Form B relays have a higher level of magnetic interaction than Form A types. A space of 0.4 inches minimum should therefore be left between adjacent parts.

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

### Similar Relays Comparison

If the Series 114 is unsuitable for your application, Pickering also manufactures another series of reed relays with similar characteristics, but in different package sizes.

Series Name		114-1-A	114-1-B	114-2-A	100HC-1-A	100HC-1-B	100HC-2-A
Physical Outline							
Depth	mm (inches)	6.3 (0.245)	6.3 (0.245)		10.2 (0.40)	10.2 (0.40)	
Width		24.1 (0.95)	29.0 (1.14)		24.1 (0.95)	29.0 (1.14)	
Height		8.2 (0.32)	12.5 (0.49)		12.7 (0.50)	15.2 (0.60)	
Package Volume (mm <sup>3</sup> )		① 1245	② 2284	③ 2284	3122	4496	4496
Typical Weights (g)		2.07	3.61	3.68	6.99	8.75	8.75
Contact Configuration		1-A (SPST)	1-B (SPNC)	2-A (DPST)	1-A (SPST)	1-B (SPNC)	2-A (DPST)
Reed Switch Type		Dry			Dry		
Stand-off Voltage (V)		500			500		
Switching Voltage (V)		200 DC/240 AC RMS			200 DC/240 AC RMS		
Switching Current (A)		1			1		
Carry Current (A)		3			3		
Switch Power (W)		40			40		

### Reed Relay Selection Tool

Because Pickering offer the largest range of high-quality reed relays, sometimes it can be difficult to find the right reed relay you require. That is why we created the Reed Relay Selector, this tool will help you narrow down our offering to get you the correct reed relay for your application. To try the tool today go to: [pickeringrelay.com/reed-relay-selector-tool](http://pickeringrelay.com/reed-relay-selector-tool)

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

### Standard Build Options

The Series 114 Reed Relays are available with a number of standard build options to tailor them to your specific application. These options are detailed in the table below. If you decide to go ahead and specify one, or more, of these options you will be allocated a unique part number suffix.


Mechanical Build Options	Electrical Build Options
Special pin configurations or pin lengths	Different coil resistance
Special print with customer's own part number or logo	Different stand-off or switching voltage
Custom packaging possibility	Operate or de-operate time
<div style="border: 2px solid red; padding: 5px; text-align: center;"> <p>勝特力材料 886-3-5753170                      勝特力电子(上海) 86-21-34970699                      勝特力电子(深圳) 86-755-83298787                      Http://www.100y.com.tw</p> </div>	Pulse capability
	Enhanced specifications
	Non-standard coil voltages and resistance figures
	Special Life testing under customer's specific load conditions
	Specific environmental requirements
	Controlled thermal EMF possibility

### Customization

If your specific requirements are not met by standard relay, or any of the standard build options, please speak to us to discuss producing a customized reed relay to service your specific application: [pickeringrelay.com/contact](http://pickeringrelay.com/contact)

### 3D Models

Interactive 3D models of the complete range of Pickering relay products in STEP, IGS and SLDPRN formats can be downloaded from the website: [pickeringrelay.com/3d-models](http://pickeringrelay.com/3d-models)

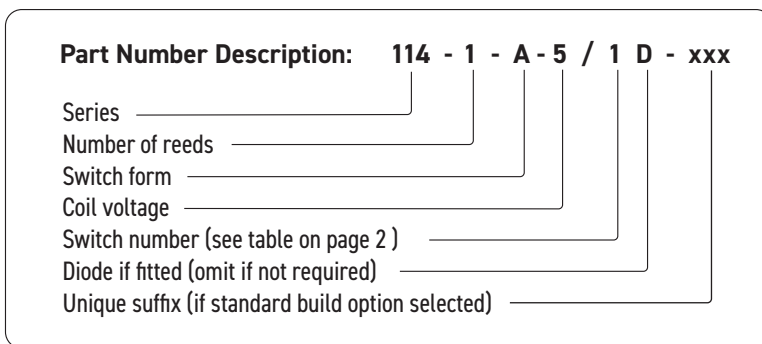

### Help

If you need any technical advice or other help, please do not hesitate to contact our Technical Sales Department. We will always be pleased to discuss Pickering relays with you. email: [techsales@pickeringrelay.com](mailto:techsales@pickeringrelay.com)












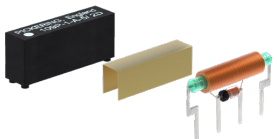

### Contact Us

UK Headquarters - email: [sales@pickeringrelay.com](mailto:sales@pickeringrelay.com) | Tel. +44 1255 428141  
 USA - email: [ussales@pickeringrelay.com](mailto:ussales@pickeringrelay.com) | Tel. +1 781 897 1710  
 Germany - email: [desales@pickeringtest.com](mailto:desales@pickeringtest.com) | Tel. +49 89 125 953 160  
 France - email: [frsales@pickeringtest.com](mailto:frsales@pickeringtest.com) | Tel. +33 9 72 58 77 00  
 Nordic - email: [ndsales@pickeringtest.com](mailto:ndsales@pickeringtest.com) | Tel. +46 340 69 06 69  
 Czech Republic: [czsales@pickeringtest.com](mailto:czsales@pickeringtest.com) | Tel. +420 558-987-613  
 China - email: [chinasales@pickeringtest.com](mailto:chinasales@pickeringtest.com) | Tel. +86 4008 799 765

For a full list of agents, distributors and representatives visit: [pickeringrelay.com/agents](http://pickeringrelay.com/agents)



# 10 Key Benefits of Pickering Reed Relays

Key Benefit	Pickering Reed Relays	Typical Industry Reed Relays	
<b>1</b> Instrumentation Grade Reed Switches	Instrumentation Grade Reed Switches with vacuum sputtered Ruthenium plating to ensure stable, long life up to 5x10E9 operations.	Often low grade Reed Switches with electroplated Rhodium plating resulting in higher, less stable contact resistance.	
<b>2</b> Formerless Coil Construction	Formerless coil construction increases the coil winding volume, maximizing magnetic efficiency, allowing the use of less sensitive reed switches resulting in optimal switching action and extended lifetime at operational extremes.	Use of bobbins decreases the coil winding volume, resulting in having less magnetic drive and a need to use more sensitive reed switches which are inherently less stable with greatly reduced restoring forces.	  Pickering former-less coil      Typical industry coil wound on bobbin
<b>3</b> Magnetic Screening	Mu-metal magnetic screening (either external or internal), enables ultra-high PCB side-by-side packing densities with minimal magnetic interaction, saving significant cost and space. <b>Pickering Mu-Metal magnetic screen - interaction approx. 5%</b>	Lower cost reed relays have minimal or no magnetic screening, resulting in magnetic interaction issues causing changes in operating and release voltages, timing and contact resistance, causing switches to not operate at their nominal voltages. <b>Typical industry screen - interaction approx. 30%</b>	  X-Ray of Pickering mu-metal magnetic screen      X-Ray of typical industry magnetic screen
<b>4</b> SoftCenter™ Technology	<b>SoftCenter™</b> technology, provides maximum cushioned protection of the reed switch, minimising internal lifetime stresses and extending the working life and contact stability.	Transfer moulded reed relays (produced using high temperature/pressure), result in significant stresses to the glass reed switch which can cause the switch blades to deflect or misalign leading to changes in the operating characteristics, contact resistance stability and operating lifetime.	  Pickering soft center protection of the reed switch      Typical industry thermo-setting hard moulded protection of the reed switch
<b>5</b> 100% Dynamic Testing	100% testing for all operating parameters including dynamic contact wave-shape analysis with full data scrutiny to maintain consistency.	Simple dc testing or just batch testing which may result in non-operational devices being supplied.	<b>Dynamic Contact Resistance Test</b> 
<b>6</b> 100% Inspection at Every Stage of Manufacturing	Inspection at every stage of manufacturing maintaining high levels of quality.	Often limited batch inspection.	
<b>7</b> 100% Thermal Cycling	Stress testing of the manufacturing processes, from -20°C to +85°C to -20°C, repeated 3 times.	Rarely included resulting in field failures.	
<b>8</b> Flexible Manufacturing Process	Flexible manufacturing processes allow quick-turn manufacturing of small batches.	Mass production: Usually large batch sizes and with no quick-turn manufacturing.	
<b>9</b> Custom Reed Relays	Our reed relays can be customized easily, e.g. special pin configurations, enhanced specifications, non-standard coil or resistance figures, special life testing, low capacitance, and more.	Limited ability to customize.	
<b>10</b> Product Longevity	Pickering are committed to product longevity; our reed relays are manufactured and supported for more than 25 years from introduction, typically much longer.	Most other manufacturers discontinue parts when they reach a low sales threshold; costing purchasing and R&D a great deal of unnecessary time and money to redesign and maintain supply.	

For more information go to: [pickeringrelay.com/10-key-benefits](http://pickeringrelay.com/10-key-benefits)



勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

© 2022 Pickering Electronics. All Rights Reserved. Pickering Electronics maintains a commitment to continuous product development, consequently we reserve the right to vary from the description given in this data sheet.