


# NAIS

## LONG LIFE RELAY

# NR-RELAYS



mm inch

## FEATURES

- Sealed construction for automatic wave soldering and cleaning
- Latching types available
- High sensitivity — TTL direct drive possible
- High speed — Up to 500 cycle/sec. operations
- Wide switching range and high welding resistance  
Gold cobalt (AuCo) contact permits
- Wider switching range from low level up to high current: 10  $\mu$ A to 1 A
- Higher sticking resistance to inrush current
- Stable contact resistance from initial stage throughout life

## SPECIFICATIONS

### Contact

Arrangement	1 Form C		
Initial contact resistance, max. (By voltage drop 6 V DC 1 A)	60 m $\Omega$		
Initial contact pressure	Approx. 5 g .18 oz		
Contact material	Gold cobalt		
Electrostatic capacitance	Contact-Contact	Sealed type	3 pF
		Magnetically sealed type	4 pF
	N.O. contact-coil	Sealed type	4 pF
		Magnetically sealed type	5 pF
	N.C. contact-coil	Sealed type	5 pF
		Magnetically sealed type	6 pF
Nominal switching capacity		1A 20 VDC, 0.3A 110 VAC	
Rating (resistive)	Max. switching power		33 VA, 20 W
	Max. switching voltage		110 V AC, 30 V DC
	Max. switching current		AC 0.3 A, DC 1 A
	Min. switching power		Approx. 100 mV 10 $\mu$ A
	Mechanical (at 500 cps.)		10 <sup>9</sup>
Expected life (min. operations)	Electrical (resistive)	1 A 20 V DC/ 0.3 A 110 V AC	10 <sup>6</sup> (at 1 cps.)
		0.5 A 30 V DC/ 0.1 A 110 V AC	3 $\times$ 10 <sup>6</sup> (at 2 cps.)
		0.25 A 30 V DC/ 0.25 A 30 V AC	5 $\times$ 10 <sup>6</sup> (at 5 cps.)
		0.2 A 24 V DC/ 0.2 A 24 V AC	10 <sup>7</sup> (at 25 cps.)
		0.1 A 12 V DC/ 0.1 A 12 V AC	5 $\times$ 10 <sup>7</sup> (at 50 cps.)
		0.1 A 9 V DC/ 0.1 A 9 V AC	10 <sup>8</sup> (at 100 cps.)

### Coil (polarized) (at 25°C 77°F)

Minimum operating power	Single side stable	72 to 133 mW
	1 coil latching	41 to 45 mW
	2 coil latching	72 to 107 mW
Nominal operating power	Single side stable	147 to 300 mW
	1 coil latching	74 to 153 mW
	2 coil latching	147 to 331 mW

### Characteristics (at 25°C 77°F)

Max. operating speed		500 cps. (mechanical)
Initial insulation resistance*1		Min. 1000 M $\Omega$ at 500 V DC*2
Initial breakdown voltage*3	Between live parts and ground	1,000 Vrms
	Between open contact	350 Vrms (500 V DC)
	Between contact and coil	1,000 Vrms
Operate time*4 (at nominal voltage)		Max. 3 ms (Approx. 1 ms)
Release time (without diode)*4 (at nominal voltage)		Max. 2 ms (Approx. 0.5 ms)
Contact bounce time	Single side stable	Approx. 0.5 ms
	1-coil /2-coil latching	Approx. 0.3 ms
Temperature rise		Max. 35°C at 0.5 W operating power Max. 65°C at 1 W operating power
Shock resistance	Functional*5	Min. 980 m/s <sup>2</sup> {100 G}
	Destructive*6	Min. 980 m/s <sup>2</sup> {100 G}
Vibration resistance	Functional*7	98 m/s <sup>2</sup> {10 G}, 10 to 55 Hz at double amplitude of 1.6 mm*8
	Destructive	117.6 m/s <sup>2</sup> {12 G}, 10 to 55 Hz at double amplitude of 2 mm
Conditions for operation, transport and storage*9 (Not freezing and condensing at low temperature)	Ambient temp.	-55°C to +65°C*10 -67°F to +149°F
	Humidity	5 to 85% R.H.
Unit weight		Approx. 7 g .25 oz

### Remarks

- \* Specifications will vary with foreign standards certification ratings.  
 \*1 Measurement at same location as "Initial breakdown voltage" section  
 \*2 Min. 500M $\Omega$  at 100 V DC between coils of 2 coil latching type  
 \*3 Detection current: 10mA, Except for between coils of 2 coil latching type  
 \*4 Excluding contact bounce time  
 \*5 Half-wave pulse of sine wave: 6ms; detection time: 10 $\mu$ s  
 \*6 Half-wave pulse of sine wave: 6ms  
 \*7 Detection time: 10 $\mu$ s  
 \*8 Although NR relays are rated at 10 G/55 cps. vibration resistance, they will withstand up to 60 G/2,000 cps., provided they receive additional support such as anchoring to the PC board with epoxy resin.  
 \*9 Refer to 5. Conditions for operation, transport and storage mentioned in AMBIENT ENVIRONMENT (Page 61)  
 \*10 Total temperature (ambient temperature plus temperature rise in coil) should not exceed 90°C 194°F for single side stable, and 105°C 221°F for latching relays. See Reference Data for determination of coil voltage versus temperature.

## TYPICAL APPLICATIONS

Telecommunications equipment, alarm devices, machine tools, NC machines, automatic warehouse control, conveyors, air-conditioners, pressing machines, tex-

tile machinery, elevators, control panels, pin-board programmers, parking meters, industrial robots, detectors, annunciators, optical instruments, business machines,

time recorders, cash registers, copiers, vending machines, medical equipment.

## ORDERING INFORMATION

EX. NR- H L2 D 12V

Types of case
H: Sealed S: Magnetically sealed

Operating function
Nil: Single side stable L: 1 coil latching L2: 2 coil latching

Coil voltage (DC)
5, 6, 12, 24, 42 V

- (Notes) 1. Power types and 1 Form A types are available on request.  
2. For UL/CSA recognized types, delete "N" at head portion of part No. and add suffix UL/CSA, when ordering. Ex. RSD-12V UL/CSA  
3. Standard packing Carton: 50 pcs., Case: 500 pcs.

## TYPES AND COIL DATA (at 25°C 77°F)

### Single side stable (NR-SD)

Nominal coil voltage, V DC	Pick-up voltage, V DC (max.)	Drop-out voltage, V DC (min.)	Maximum allowable voltage, V DC (40°C 104°F)	Coil resistance, Ω (±10%)	Nominal operating power, mW	Inductance, Henrys
5	3.5	0.5	13	170	147	0.050
6	4.7	0.6	14	220	164	0.075
12	9.3	1.2	28	890	162	0.3
24	16	2.4	42	2,000	288	0.66
42	28	4.2	85	8,000	221	2.7

### 1 coil latching (NR-SLD)

Nominal coil voltage, V DC	Pick-up voltage, V DC (max.)	Maximum allowable voltage, V DC (40°C 104°F)	Coil resistance, Ω (±10%)	Nominal operating power, mW	Inductance, Henrys
5	3.5	18	340	74	0.12
6	4.3	20	450	80	0.16
12	8.0	30	1,500	96	0.66
24	17	75	6,000	96	2.4
42	23	110	12,000	147	3.9


### 2 coil latching (NR-SL2D)

Nominal coil voltage, V DC	Pick-up voltage, V DC (max.)	Maximum allowable voltage, V DC (40°C 104°F)	Coil resistance, Ω (±10%)		Nominal operating power, mW	Inductance, Henrys
			Set coil	Reset coil		
5	3.5	13.0	170	170	147	0.024
6	4.3	14.0	225	225	160	0.04
12	8.0	26.0	650	650	230	0.14
24	17.0	50.0	2,700	2,700	213	0.35
42	23.0	75.0	5,500	5,500	321	0.8

(Note) Maximum allowable operating power: 1000 mW at 25°C 77°F.

## DIMENSIONS

mm inch

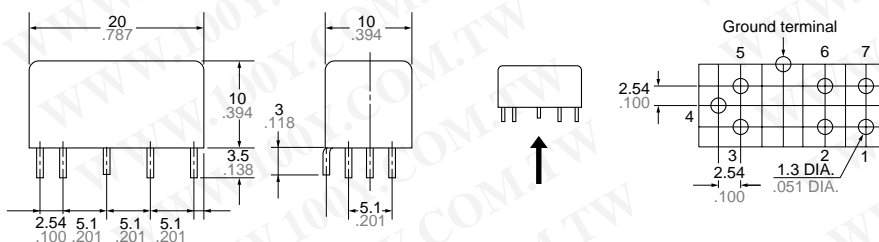

### Terminal dimensions (Except soldering)

Terminal No.	Thickness	Width
1, 7	0.5 .020	0.6 .024
4	0.3 .012	0.7 .028
2, 3, 5, 6, ground terminal	0.5 DIA. .020 DIA.	

Soldering: 0.3 .012 max.




General tolerance: ±0.5 ±0.20

Tolerance: ±0.2 ±0.08

# DIFFERENCES BETWEEN NR RELAYS AND REED RELAYS

	NR relays	Reed relays
Structure		
Contact arrangement	1 Form C	1 Form A or 1 Form B
Contact capacity	20 W (high contact pressure)	5 to 15 W
Operating function	Single side stable Latching	Single side stable
"Getter" hole	Yes	No


"Getter" holes are formed on both pole shoes to obtain uniform contact resistance throughout life. Film-forming phenomena on contacts is thus fully prevented.

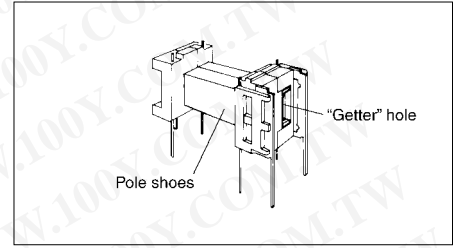

## REFERENCE DATA

### 1.-(1) Contact reliability


Test sample: NR-SD-24V 54 pcs.  
 Circuits: (A) Following figure with diode  
 (B) Following figure without diode

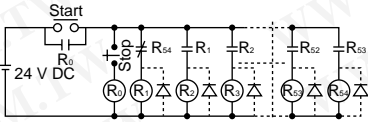


Item to be checked: Detect with the circuit stopped  
 Circuits:  
 (A) Diode provided: The circuit does not stop throughout 100 million times.  
 (B) Diode not provided:  $\lambda_{60} = 2.5 \times 10^{-8}$  times

### 1.-(2) Contact reliability TEST CONDITION


Sample: NR-SD-24V, 10 pcs.  
 Contact voltage: 100 mV  
 Contact current: 10 $\mu$ A  
 Cycle rate: 50 cps.  
 Detection level: 100  $\Omega$   
 Testing operation:  $3 \times 10^7$   
 $m = 1.9$   
 $\sigma = 2.5 \times 10^7$   
 $\mu = 4.7 \times 10^7$   
 95% reliability limit:  $1.15 \times 10^7$   
 (Mean time between failure)

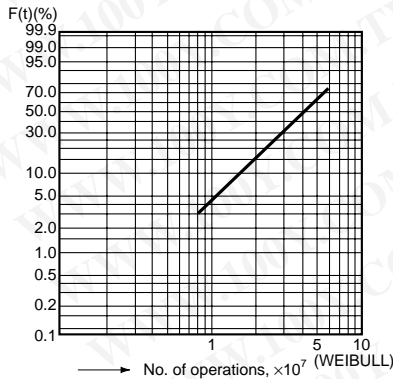


### 2. Coil temperature rise (under saturated condition)

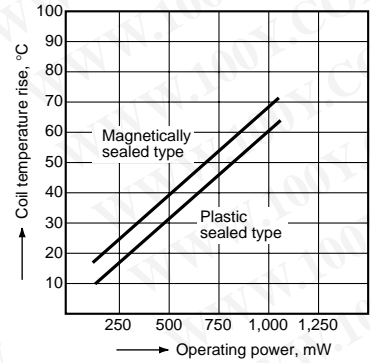


### 3.-(1) Operate time including bounce time (Single side stable)

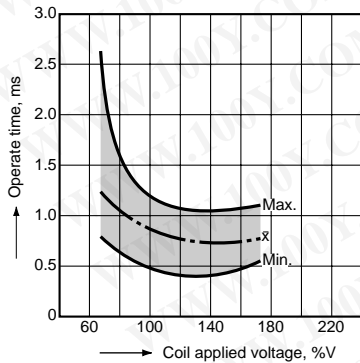


### 3.-(2) Operate time including bounce time (2 coil latching)

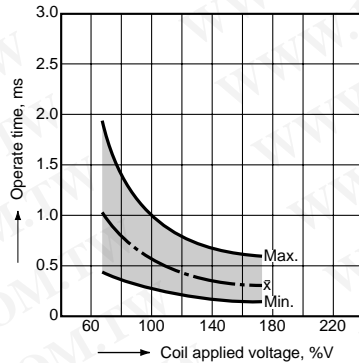


### 4. Release time including bounce time (Single side stable)

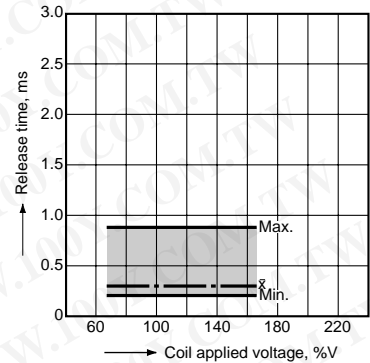


5.-(1) Leaving at high temperature  
(Change of pick-up and drop-out voltages)  
Tested sample: NR-SD-24V, 30 pcs.  
Condition: Deenergized leaving at 90°C 194°F  
(constant temperature)

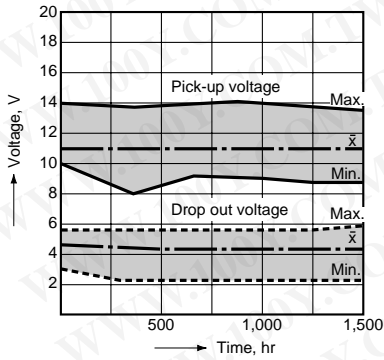

5.-(2) Leaving at high temperature  
(Change of contact resistance)  
Tested sample: NR-SD-24V, 30 pcs.  
Condition: Deenergized leaving at 90°C 194°F  
(constant temperature)

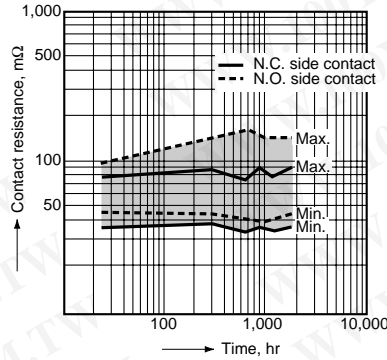


6. High frequency characteristics  
Tested sample: NR-SD-24V  
Tested condition:

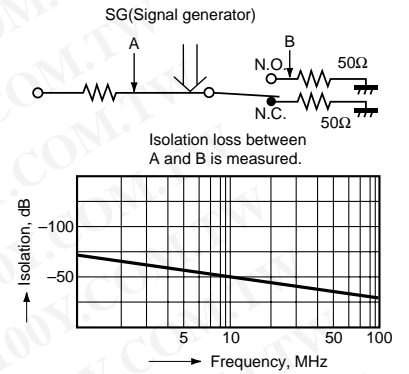


7. Contact sticking resistance  
TEST CONDITION

The purpose of this test was to confirm contact sticking resistance and contact stability against coil ripples.  
Tested Sample: NR-SD-24V, 10 pcs.  
Test method: Following coil ripples were applied.  
Test period: 500 hours

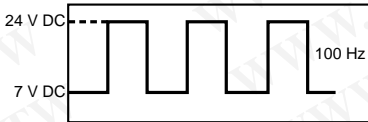

TEST RESULT


No occurrence of sticking was observed.  
Contact resistance: Fig. 1  
NR-SD-24V: 29 mΩ to 30.4 mΩ

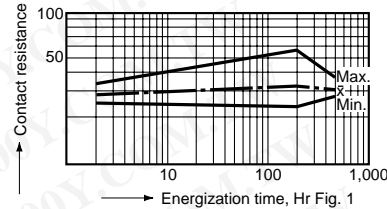


In actual application, above coil ripples should be avoided and use of a capacitor in the circuit is recommended to keep the ripple factor below 5%.

8. Distribution of contact resistance


Tested sample: NR-SD-24V (WG type) 105 pcs.

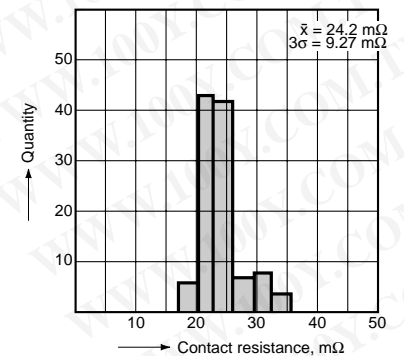

9.-(1) Rate of change in pick-up and drop-out voltage (Single side stable)

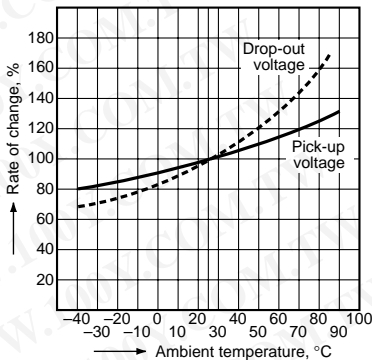


9.-(2) Rate of change in pick-up voltage (2 coil latching)

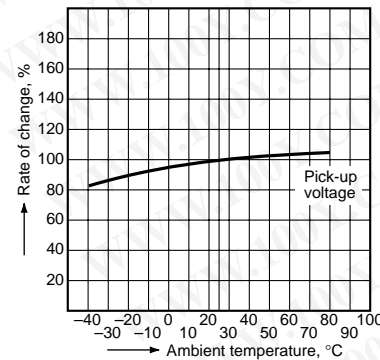


10.-(1) Mechanical life  
(Change of pick-up and drop-out V)

Tested Sample: NR-SD-24V, 10 pcs.  
Operation frequency: 500 cps

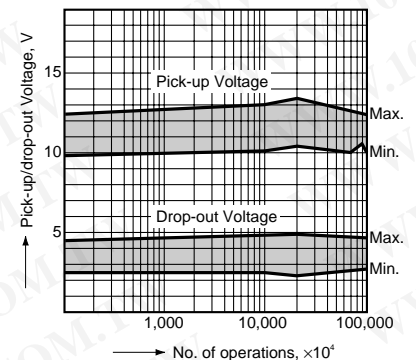


10.-(2) Mechanical life

(Change of contact resistance)  
Tested Sample: NR-SD-24V, 10 pcs.  
Operation frequency: 500 cps

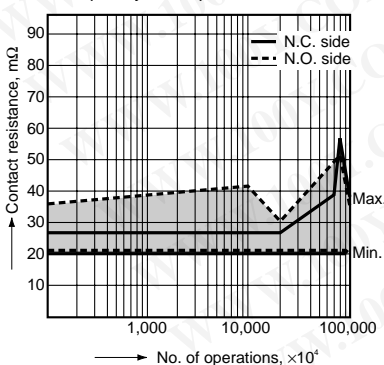


11.-(1) Electrical life

(1 A 20 V DC resistive load)  
Tested sample: NR-SD-24V, 10 pcs.

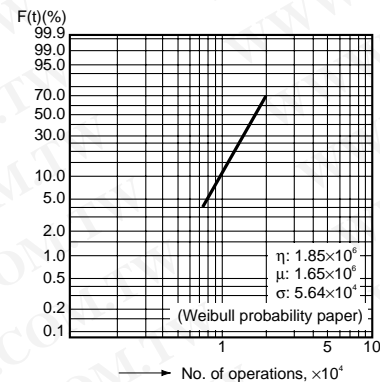

11.-(2) Electrical life


Tested Sample: NR-SD-24V, 10 pcs.  
Load: 60 mA 24 V DC resistive load  
Frequency: 50 cps

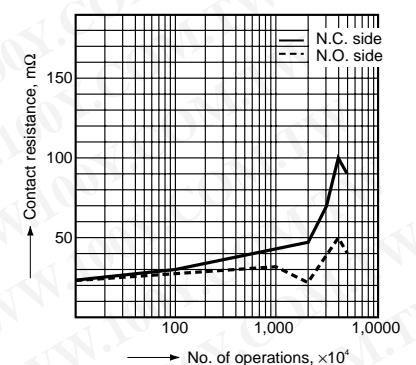

# NR



## 11.-(3) Electrical life

Tested Sample: NR-SD-12V, 10 pcs.  
Load: 54 mA 12 V DC inductive load with diode protection  
(4 relay coils in parallel of NR-SD-12V)  
Frequency: 50 cps

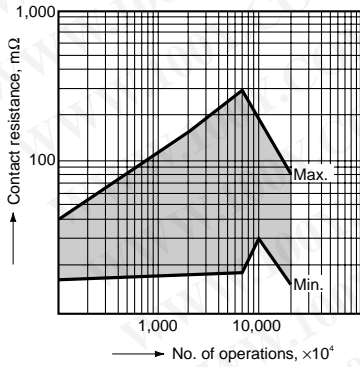


## 11.-(4) Electrical life

(327 mA 24 V DC relay coil load)  
Tested sample: NR-SD-24V, 5 pcs.  
Condition: HP2-DC24x6 pcs. in parallel, diode protector provided

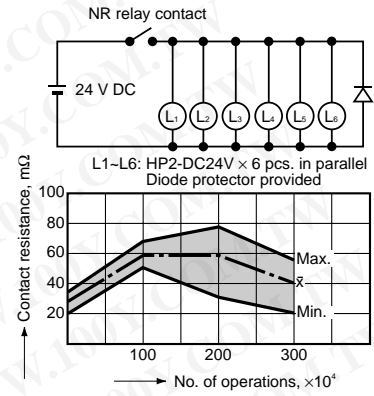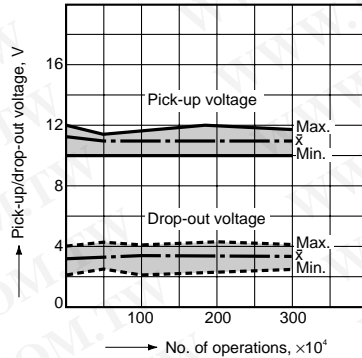

## 12. Thermal electro motive force

Tested Sample: NR-SD-12V, 5 pcs.  
Coil applied V: 12 V DC  
Ambient atmosphere: 25°C 77°F, 60% RH

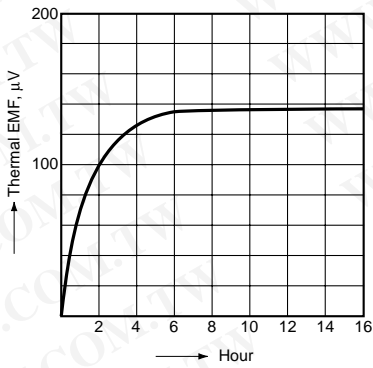


## 13. High temperature test

**TEST CONDITION**  
Tested Sample: NR-SD-24V, 30 pcs.  
Ambient temperature: 80°C 176°F  
Humidity: less than 50% R.H.  
Exposure time: 2,000 hours with relays deenergized.

### TEST RESULT

Contact resistance: Fig. 1  
All samples were measured less than 100 mΩ in contact resistance throughout this test.

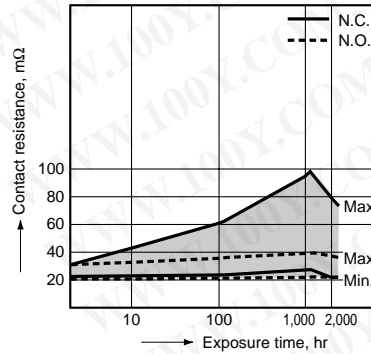


## 14. Influence of adjacent mounting mm inch

Type	Distance			
	0 (0)	5 (.197)	10 (.394)	15 (.591)
Magnetically shielded type	±5%	±1%	0	0
Sealed type	—	±10%	±6%	±2%

## 15. Resistive load test

### TEST CONDITION

Tested Sample: NR-SD-24V, 10 pcs.  
Load: 1 A 20 V DC Resistive  
Cycle rate: 1.4 cps.  
Contact resistance in life test

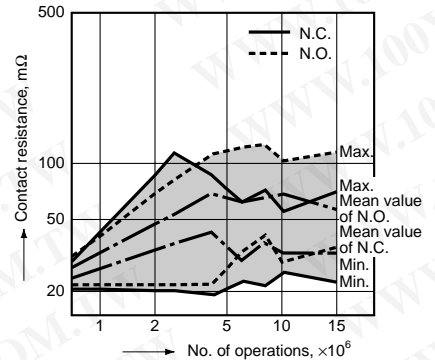

# APPLICATION HINTS

## Contact protection circuit

When using NR relays in inductive load circuits, a contact protection circuit is recommended.

### Examples:

CR	CR	Diode
<p>(L) : Inductive load</p>		
<p>1. r = more than 20 to 30 ohms 2. In an AC circuit impedance of L is to be somewhat smaller than impedance of r and c.</p>	<p>Can be used for both AC and DC circuits. Use 500 to 1000 ohms for r and 0.1 μF to 0.2 μF 200 V for c in a general 12 to 24 V load circuit.</p>	<p>For DC circuits only.</p>

The following is life data under our HP2 relay load.

Contact voltage	Contact current	Contact protection circuit	Operating speed	Expected life, min. op.
6 V DC	232 mA	0.2 μF + 1kΩ or diode	2 op./s	3×10 <sup>7</sup>
12 V DC	106 mA	0.2 μF + 1kΩ or diode	2 op./s	3×10 <sup>7</sup>
24 V DC	54 mA	0.1 μF + 1kΩ or diode	2 op./s	3×10 <sup>7</sup>
100 V DC	15 mA	0.1 μF + 1kΩ or diode	2 op./s	2×10 <sup>7</sup>
24 V DC	80 mA	0.2 μF + 1kΩ	2 op./s	3×10 <sup>7</sup>
100 V DC	20 mA	0.1 μF + 1kΩ or varistor	2 op./s	2×10 <sup>7</sup>
200 V DC	10 mA	0.1 μF + 1kΩ	2 op./s	2×10 <sup>7</sup>

(Notes)

- When inrush current occurs in the capacitor load circuit or incandescent lamp load circuit, reduce it to less than 5 A. Electrical life of "AuCo" contact types is 10,000 operations in a 5 A inrush current circuit.
- When 5 A to 10 A inrush current occurs in the capacitor load circuit or incandescent lamp load circuit, the use of power types is recommended.

**2 coil latching types**

A) The circuit at right is recommended when using one coil for latching and the other coil for reset.


NR relays are sensitive enough to be operated by the discharge of energy accumulated in the inner-coil capacitance. The use of a diode of over 200 V breakdown will prevent misoperation from this source. In order to maintain the insulation between the two coils, connection of the terminal No. 3 and No. 6 or the terminal No. 2 and No. 5 is recommended, as shown in the right figure.

Rectifiers should be inserted in this circuit when the nominal coil voltage of the NR relay is more than 24 V DC.

B) No damage will occur to the coil of either the one or two coil latching types even if the operating voltage is as much as 2 or 3 times the nominal coil voltage.

C) If separate pulses are applied to each coil of the 2 coil latching types, the first pulse will operate when the pulses are of equal voltage. When voltages differ the higher voltage will cause operation provided the voltage difference is greater

than the measured pick-up voltage. Voltage difference on the coils will reduce contact pressure proportionately. Continuous bias voltage after an operating pulse lowers contact pressure and vibration resistance.

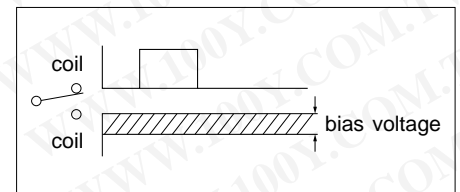

**Ripple factor**

Coils should be operated on pure DC. Rectified AC may cause changes in the

pick-up/drop-out characteristics because of the ripple factor. Use of a capacitor in

the circuit is recommended to keep the ripple factor below 5%.

To calculate the ripple factor

$$\text{Ripple factor (\%)} = \frac{E_{\text{max.}} - E_{\text{min.}}}{E_{\text{mean}}} \times 100\%$$


E max. = max. value of pulsating component  
 E min. = min. value of pulsating component  
 E mean - average value DC component

**When designing NR relay circuits**

Care should be taken when designing relay circuits since the response of the relay is so fast that bouncing or chattering from conventional relays in the circuit may cause false operation.

**When using long lead wires**


When long wires (as long as 100 m or more) are to be used, the use of resistance (10 to 50 Ω) in series with the contact is required in order to eliminate the effect of the possible inrush current due to the stray capacitance existing between the two wires or between the wire and ground.

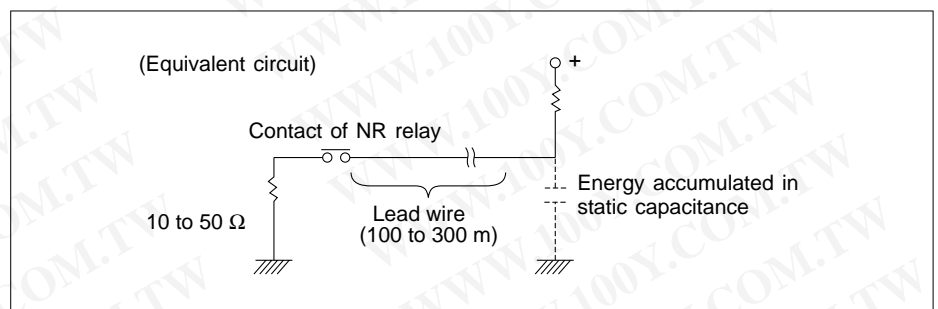

# NR



## AC operation of latching relays

When using circuits such as those at the right, avoid continued or extended latching or resetting power input.

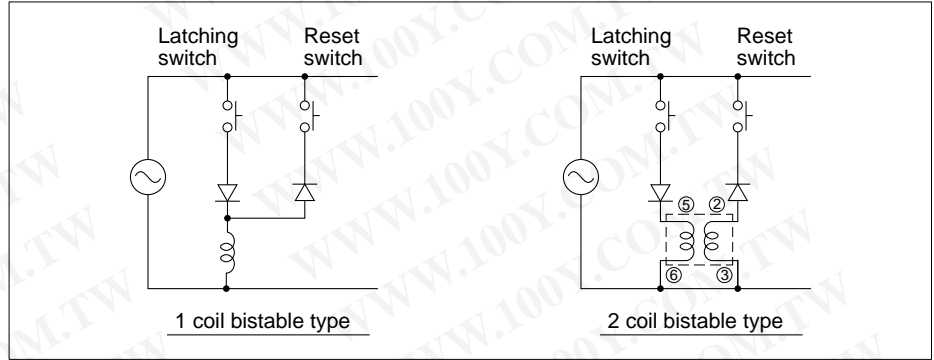

## Capacitor discharge operation of latching types


When operating latching types by discharge of a capacitor, more reliable operation can be expected if the time to reach pick-up voltage is greater than 2 ms at 5 to 10  $\mu\text{F}$ : (24 V type).

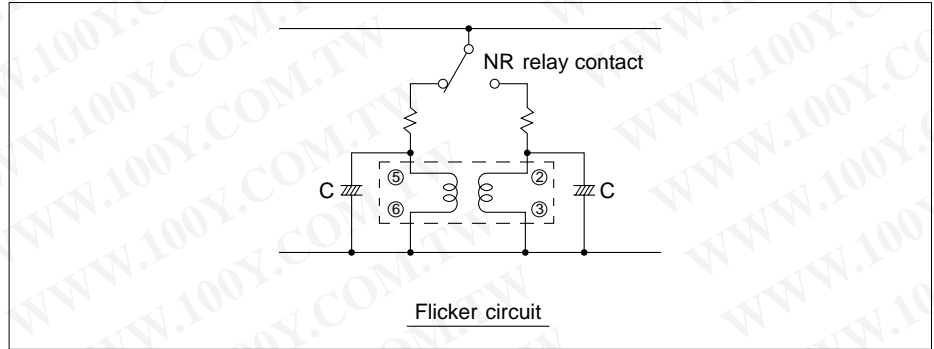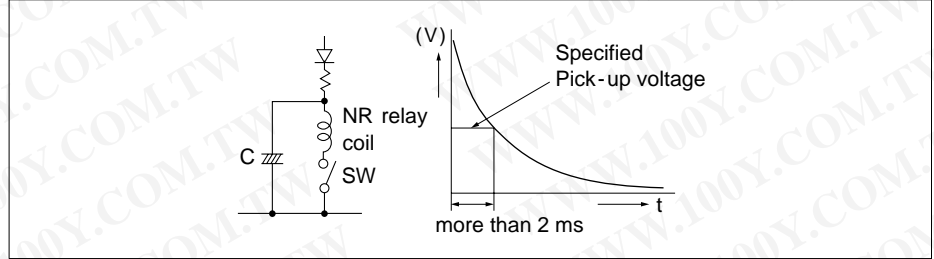

## Automatic coil circuit interruption

Misoperation may occur in self-operated cutoff circuits such as shown at right. This can be avoided by adding a resistor and capacitor and increasing the pick-up voltage to above that specified.

In a timer circuit, step-pulse voltage from PUT (Programmable Unijunction Transistor) or SBS (Silicon Bilateral Switch) is recommended.

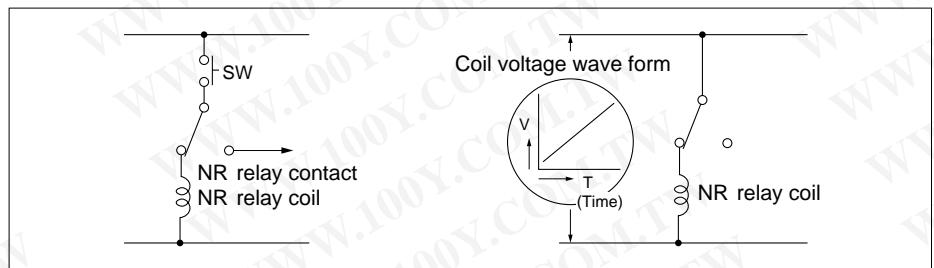

## Residual voltage


When single side stable types or latching types are driven by transistor or UJT, residual voltage is sometimes applied to the

coils and decreases contact pressure at N.O. side even if the transistor or UJT are in OFF condition. As a result, characteris-

tics of relays may be harmed. Design your circuits in principle to make such residual voltage zero.

## Short circuit prevention between N.C. and N.O.

The separation of loads or insertion of a resistor for circuit protection are recommended for the circuits where large current flows due to arcing. (See Fig. 1).

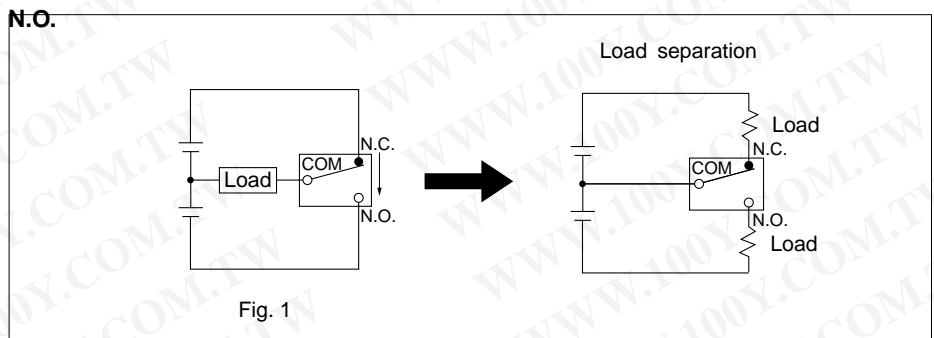


## ACCESSORIES

### PC board terminal sockets (with hold-down clip)




R-PS



Terminal width: 1.3 .051  
Terminal thickness: 1.2 .047

General tolerance:  $\pm 0.5 \pm .020$

### PC board pattern (Copper-side view)

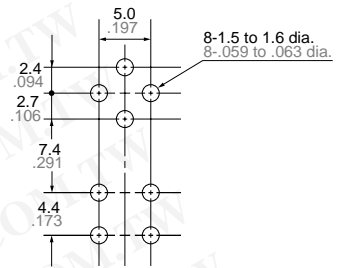

Tolerance:  $\pm 0.2 \pm .008$

**For Cautions for Use, see Relay Technical Information (Page 48 to 76).**