


**DESCRIPTION** The 2SC1674 is designed for use in FM RF amplifier and local oscillator of FM tuner.

- FEATURES**
- High gain bandwidth product ( $f_T = 600$  MHz TYP.)
  - Small output capacitance ( $C_{ob} = 1.0$  pF TYP.)
  - Low noise figure (NF = 3.0 dB TYP. @100 MHz)

**ABSOLUTE MAXIMUM RATINGS**

<b>Maximum Temperatures</b>	
Storage Temperature . . . . .	-55 to +125 °C
Junction Temperature . . . . .	+125 °C Maximum
<b>Maximum Power Dissipation (Ta=25 °C)</b>	
Total Power Dissipation . . . . .	250 mW
<b>Maximum Voltages and Currents (Ta=25 °C)</b>	
V <sub>CB0</sub> Collector to Base Voltage . . . . .	30 V
V <sub>CEO</sub> Collector to Emitter Voltage . . . . .	20 V
V <sub>EBO</sub> Emitter to Base Voltage . . . . .	4.0 V
I <sub>C</sub> Collector Current . . . . .	20 mA
I <sub>B</sub> Base Current . . . . .	20 mA

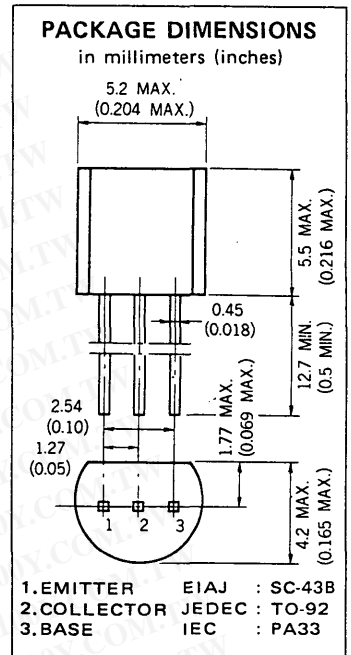

**ELECTRICAL CHARACTERISTICS (Ta=25 °C)**

SYMBOL	CHARACTERISTIC	MIN.	TYP.	MAX.	UNIT	TEST CONDITIONS
$h_{FE}$	DC Current Gain	40	90	180	—	$V_{CE} = 6.0$ V, $I_C = 1.0$ mA
$C_{ob}$	Output Capacitance		1.0	1.3	pF	$V_{CB} = 6.0$ V, $I_E = 0$ , $f = 1.0$ MHz
NF	Noise Figure		3.0	5.0	dB	$V_{CE} = 6.0$ V, $I_E = -1.0$ mA, $R_G = 50$ $\Omega$ , $f = 100$ MHz See test circuit
$f_T$	Gain Bandwidth Product	400	600		MHz	$V_{CE} = 6.0$ V, $I_E = -1.0$ mA
$G_{pe}$	Power Gain	18	22		dB	$V_{CE} = 6.0$ V, $I_E = -1.0$ mA, $R_G = 50$ $\Omega$ , $f = 100$ MHz See test circuit
$C_{c-rb'b}$	Collector to Base Time Constant		12	15	ps	$V_{CE} = 6.0$ V, $I_E = -1.0$ mA, $f = 31.9$ MHz
$I_{CBO}$	Collector Cutoff Current			100	nA	$V_{CB} = 30$ V, $I_E = 0$
$I_{EBO}$	Emitter Cutoff Current			100	nA	$V_{EB} = 3.0$ V, $I_C = 0$
$V_{BE}$	Base to Emitter Voltage		0.72		V	$V_{CE} = 6.0$ V, $I_C = 1.0$ mA
$V_{CE(sat)}$	Collector Saturation Voltage		0.1	0.3	V	$I_C = 10$ mA, $I_B = 1.0$ mA










**Classification of  $h_{FE}$**

Rank	M	L	K
Range	40 - 80	60 - 120	90 - 180


$h_{FE}$  Test Conditions :  $V_{CE} = 6.0$  V,  $I_C = 1.0$  mA

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)


TYPICAL CHARACTERISTICS (Ta = 25 °C unless otherwise noted)

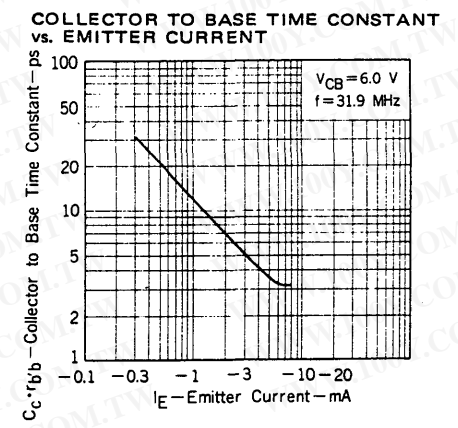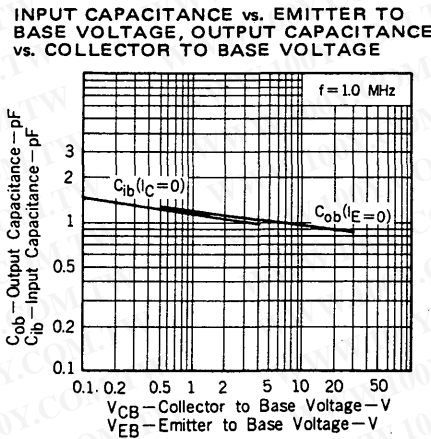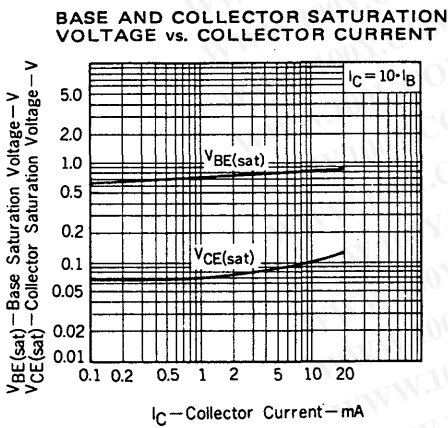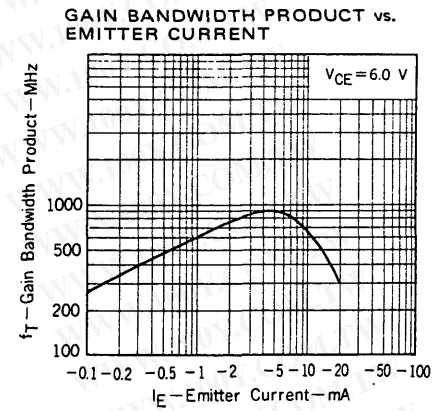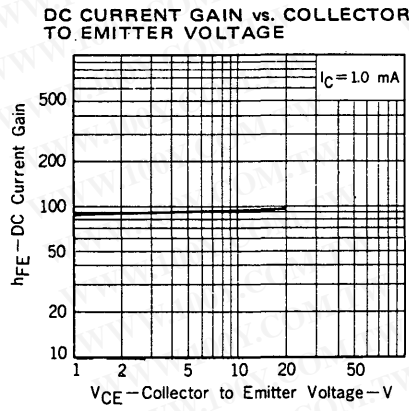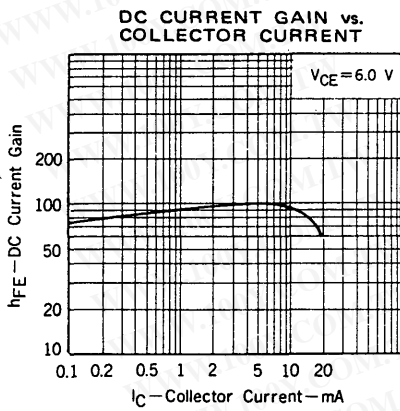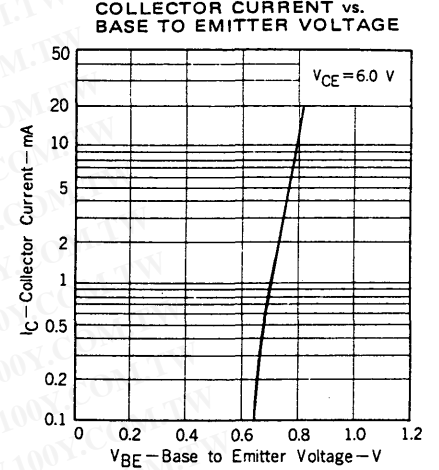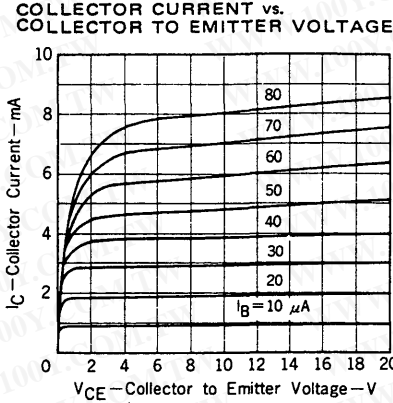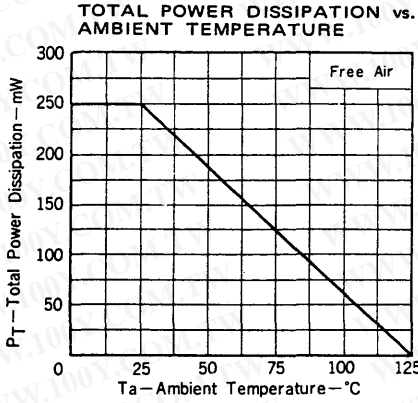


INPUT ADMITTANCE vs. COLLECTOR CURRENT

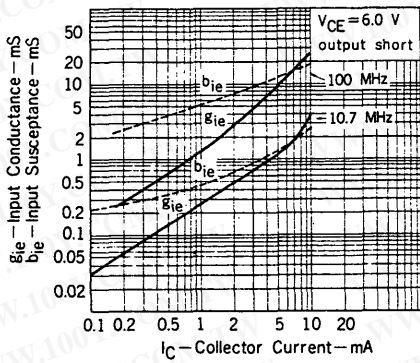


REVERSE TRANSFER ADMITTANCE vs. COLLECTOR CURRENT

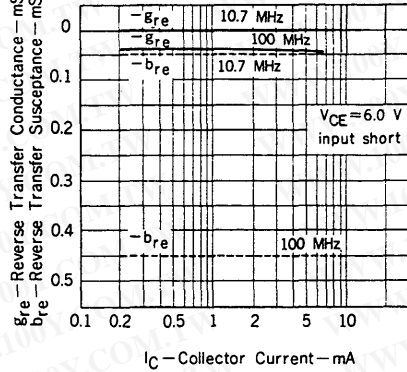


FORWARD TRANSFER ADMITTANCE vs. COLLECTOR CURRENT

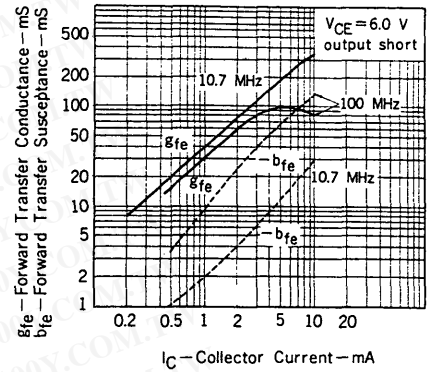


OUTPUT ADMITTANCE vs. COLLECTOR CURRENT

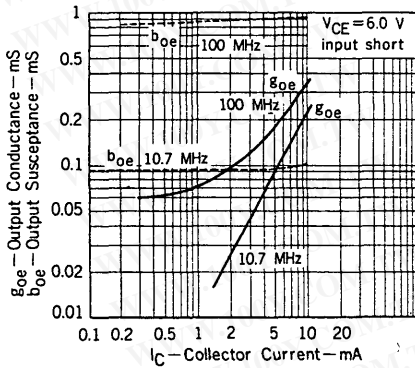


INPUT ADMITTANCE vs. COLLECTOR CURRENT

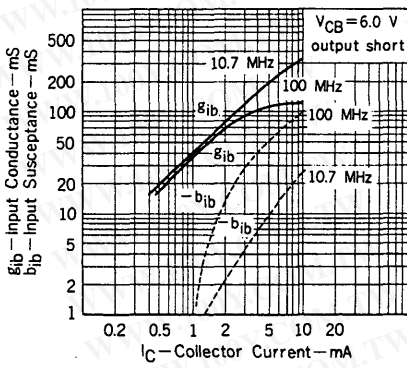


REVERSE TRANSFER ADMITTANCE vs. COLLECTOR CURRENT

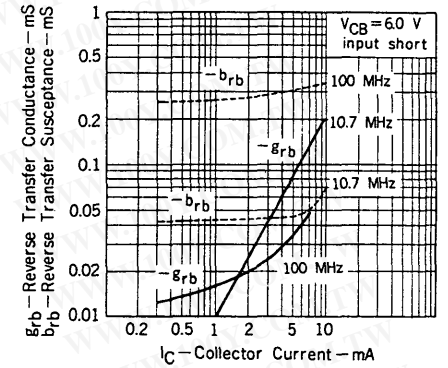


FORWARD TRANSFER ADMITTANCE vs. COLLECTOR CURRENT

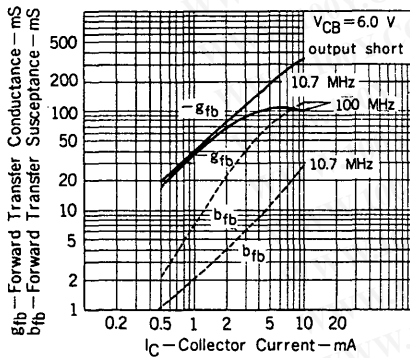


INPUT ADMITTANCE vs. FREQUENCY

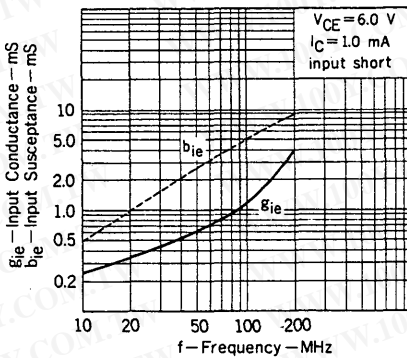


REVERSE TRANSFER ADMITTANCE vs. FREQUENCY

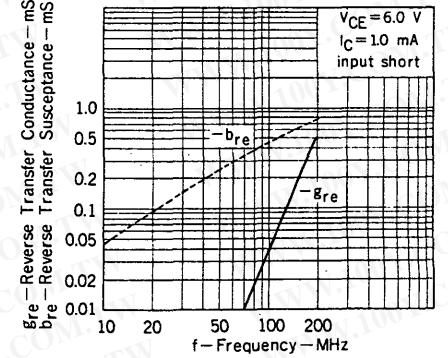


FORWARD TRANSFER ADMITTANCE vs. FREQUENCY

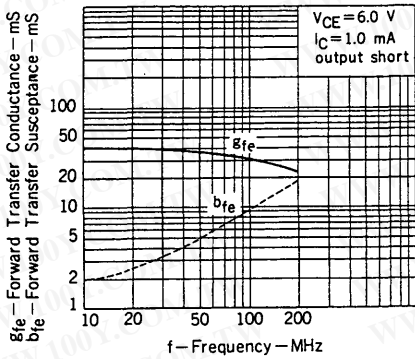

OUTPUT ADMITTANCE vs. FREQUENCY

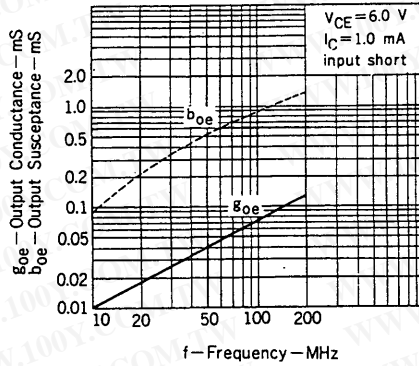

POWER GAIN, NOISE FIGURE vs. EMITTER CURRENT

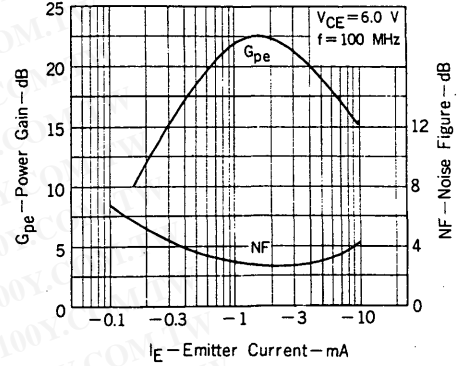

100 MHz  $G_{pe}$ , NF TEST CIRCUIT

