ALUMINUM ELECTROLYTIC CAPACITORS

nichicon

UB Chip Type, High Reliability series

For SMD

- Chip type, high temperature range, for +125°C use.
- Applicable to automatic mounting machine using carrier tape.

勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

UB ← High Temperature **ux**

■Specifications

Item	Performance Characteristics
Category Temperature Range	–40 ~ +125°C
Rated Voltage Range	10 ~ 50V
Rated Capacitance Range	10 ~ 330µF
Capacitance Tolerance	±20% at 120Hz, 20°C
Leakage Current	After 1 minute's application of rated voltage, leakage current is not more than 0.03CV or 4(µA) , whichever is greater.
tan δ	Measurement frequency : 120Hz, Temperature : 20°C Rated voltage (V): 10 / 16 / 25 / 35 / 50 tan δ (MAX.): 0.32 / 0.24 / 0.21 / 0.18 / 0.18
Stability at Low Temperature	Measurement frequency : 120Hz Rated voltage (V): 10 / 16 / 25 / 35 / 50 Impedance ratio ZT / Z20 (MAX.) Z–40°C / Z+20°C: 12 / 8 / 6 / 4 / 4
Endurance	After 2000 hours' (φ8 × 6.2 : 1000 hours) application of rated voltage at 125°C, capacitors meet the characteristic requirements listed at right. Capacitance change: Within ±30% of initial value tan δ: 300% or less of intial specified value Leakage current: Initial specified value or less
Shelf Life	After leaving capacitors under no load at 125°C for 1000 hours, they meet the specified value for endurance characteristics listed above.
Resistance to soldering heat	The capacitors shall be kept on the hot plate maintained at 250°C for 30 seconds. After removing from the hot plate and restored at room temperature, they meet the characteristic requirements listed at right. Capacitance change: Within ±10% of initial value tan δ: Initial specified value or less Leakage current: Initial specified value or less
Marking	Black print on the case top.

■Chip Type

(φ8 × 6.2)

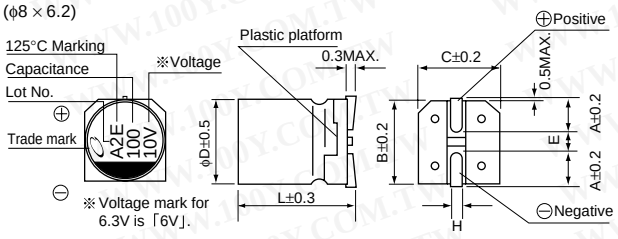

(φ8 × 10, φ10 × 10)

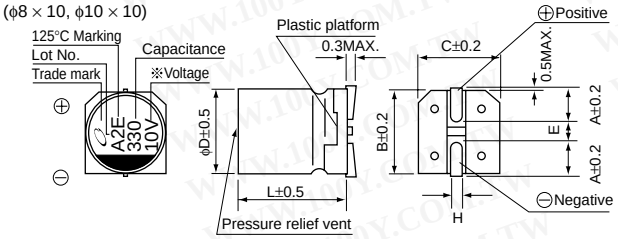

(mm)

φD×L	8×6.2	8×10	10×10
A	3.3	2.9	3.2
B	8.3	8.3	10.3
C	8.3	8.3	10.3
E	2.3	3.1	4.5
L	6.2	10	10
H	0.5 ~ 0.8	0.8 ~ 1.1	0.8 ~ 1.1

Type numbering system (Example : 10V 100µF)

1	2	3	4	5	6	7	8	9	10	11	12	13	14
U	U	B	1	A	1	0	1	M	C	R	1	G	S

- 14: Taping code
- 10–11: Configuration

φD × L	Code
8 × 6.2	CR
8 × 10	NR
10 × 10	NR

- 9: Capacitance tolerance (±20%)
- 6–8: Rated Capacitance (100µF)
- 4–5: Rated voltage (10V)
- 3: Series name
- 1–2: Type

- The lead-free product is also available upon request. In this case, L will be put at 11th digit of type numbering system.

■Dimensions

φ D × L (mm)

Cap.(µF) \ V	Code	10		16		25		35		50	
		1A		1C		1E		1V		1H	
10	100									8×6.2	24
22	220									8×6.2	38
33	330							8×6.2	44	8×10	46
47	470					8×6.2	48	8×10	52	10×10	58
100	101	8×6.2	58	8×10	66	8×10	74	10×10	80		
220	221	8×10	90	10×10	102	10×10	116				
330	331	10×10	112							Case size	Rated ripple

Rated Ripple (mA rms) at 125°C 120Hz

●Frequency coefficient of rated ripple current

Frequency	50 Hz	120 Hz	300 Hz	1 kHz	10 kHz~
Coefficient	0.70	1.00	1.17	1.36	1.50

- Taping specifications are given in page 22.
- Please refer to page 3 for the minimum order quantity.
- Recommended land size are given in page 23