

# KYA Series

- Downsized from KY series
- Newly innovative electrolyte is employed to minimize ESR
- Endurance with ripple current : 4,000 to 10,000 hours at 105°C
- Non solvent resistant type
- RoHS Compliant


勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## ◆SPECIFICATIONS

Items	Characteristics	
Category	-40 to +105°C	
Temperature Range		
Rated Voltage Range	6.3 to 100V <sub>dc</sub>	
Capacitance Tolerance	±20% (M) (at 20°C, 120Hz)	
Leakage Current	I=0.01CV or 3μA, whichever is greater. Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C after 2 minutes)	
Dissipation Factor (tanδ)	Rated voltage (V <sub>dc</sub> )	6.3V 10V 16V 25V 35V 50V 63V 100V
	tanδ (Max.)	0.22 0.19 0.16 0.14 0.12 0.10 0.09 0.08
	When nominal capacitance exceeds 1,000μF, add 0.02 to the value above for each 1,000μF increase. (at 20°C, 120Hz)	
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (V <sub>dc</sub> )	6.3V 10V 16V 25V 35V 50V 63V 100V
	Z(-25°C)/Z(+20°C)	4 3 2 2 2 2 2 2
	Z(-40°C)/Z(+20°C)	8 6 4 3 3 3 3 3 (at 120Hz)
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after subjected to DC voltage with the rated ripple current is applied for the specified period of time at 105°C.	
	Time	6.3 to 10V <sub>dc</sub> φ5 & 6.3 : 4,000hours φ8 & 10 : 6,000hours φ12.5 to 18 : 8,000hours 16 to 100V <sub>dc</sub> φ5 & 6.3 : 5,000hours φ8 & 10 : 7,000hours φ12.5 to 18 : 10,000hours
	Capacitance change	≤±25% of the initial value
	D.F. (tanδ)	≤200% of the initial specified value
	Leakage current	≤The initial specified value
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 500 hours at 105°C without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to Item 4.1 of JIS C 5101-4.	
	Capacitance change	≤±25% of the initial value
	D.F. (tanδ)	≤200% of the initial specified value
	Leakage current	≤The initial specified value


## ◆DIMENSIONS [mm]

- Terminal Code : E

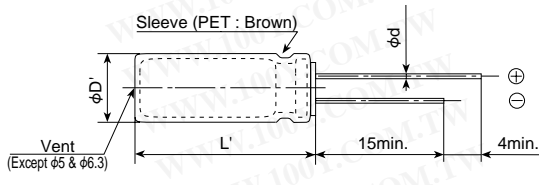

φD	5	6.3	8	10	12.5	16
φd	0.5	0.5	0.6	0.6	0.6	0.8
F	2.0	2.5	3.5	5.0	5.0	7.5
φD'	φD+0.5max.					
L'	L+1.5max.					

## ◆PART NUMBERING SYSTEM

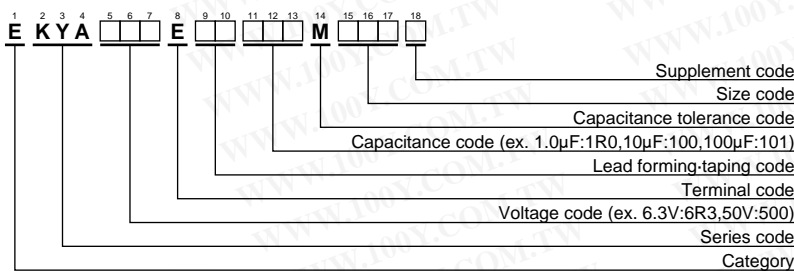

Specifications in this bulletin are subject to change without notice.

◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Case size φD×L(mm)	Impedance (Ωmax/100kHz)		Rated ripple current (mA rms/105°C, 100kHz)	Part No.	WV (Vdc)	Cap (μF)	Case size φD×L(mm)	Impedance (Ωmax/100kHz)		Rated ripple current (mA rms/105°C, 100kHz)	Part No.
			20°C	-10°C						20°C	-10°C		
6.3	180	5 × 11	0.40	1.6	250	EKYA6R3E□□181ME11D	35	270	8 × 15	0.087	0.35	840	EKYA350E□□271MH15D
	470	6.3 × 11	0.22	0.87	400	EKYA6R3E□□471MF11D		330	10 × 12.5	0.080	0.32	865	EKYA350E□□331MJC5S
	820	8 × 11.5	0.13	0.52	640	EKYA6R3E□□821MHB5D		390	8 × 20	0.069	0.27	1,050	EKYA350E□□391MH20D
	1,200	8 × 15	0.087	0.35	840	EKYA6R3E□□122MH15D		470	10 × 16	0.060	0.24	1,300	EKYA350E□□471MJ16S
	1,200	10 × 12.5	0.080	0.32	865	EKYA6R3E□□122MJC5S		680	10 × 20	0.046	0.18	1,400	EKYA350E□□681MJ20S
	1,500	8 × 20	0.069	0.27	1,050	EKYA6R3E□□152MH20D		820	10 × 25	0.042	0.17	1,650	EKYA350E□□821MJ25S
	1,800	10 × 16	0.060	0.24	1,300	EKYA6R3E□□182MJ16S		1,000	12.5 × 20	0.035	0.12	1,900	EKYA350E□□102MK20S
	2,700	10 × 20	0.046	0.18	1,400	EKYA6R3E□□272MJ20S		1,500	12.5 × 25	0.027	0.089	2,230	EKYA350E□□152MK25S
	3,300	10 × 25	0.042	0.17	1,650	EKYA6R3E□□332MJ25S		2,700	16 × 25	0.021	0.060	2,930	EKYA350E□□272ML25S
	3,900	12.5 × 20	0.035	0.12	1,900	EKYA6R3E□□392MK20S		3,300	16 × 31.5	0.017	0.050	3,450	EKYA350E□□332MLN3S
	5,600	12.5 × 25	0.027	0.089	2,230	EKYA6R3E□□562MK25S		3,900	16 × 35.5	0.015	0.044	3,610	EKYA350E□□392MLP1S
	10,000	16 × 25	0.021	0.060	2,930	EKYA6R3E□□103ML25S		1.0	5 × 11	4.0	16.0	30	EKYA500E□□1R0ME11D
	12,000	16 × 31.5	0.017	0.050	3,450	EKYA6R3E□□123MLN3S		2.2	5 × 11	2.5	10.0	43	EKYA500E□□2R2ME11D
	15,000	16 × 35.5	0.015	0.044	3,610	EKYA6R3E□□153MLP1S		3.3	5 × 11	2.2	8.8	53	EKYA500E□□3R3ME11D
	10	120	5 × 11	0.40	1.6	250		EKYA100E□□121ME11D	4.7	5 × 11	1.9	7.6	88
330		6.3 × 11	0.22	0.87	400	EKYA100E□□331MF11D	10	5 × 11	1.5	6.0	100	EKYA500E□□100ME11D	
560		8 × 11.5	0.13	0.52	640	EKYA100E□□561MHB5D	22	5 × 11	0.70	2.8	180	EKYA500E□□220ME11D	
820		8 × 15	0.087	0.35	840	EKYA100E□□821MH15D	27	5 × 11	0.70	2.8	250	EKYA500E□□270ME11D	
820		10 × 12.5	0.080	0.32	865	EKYA100E□□821MJC5S	56	6.3 × 11	0.30	1.2	295	EKYA500E□□560MF11D	
1,200		8 × 20	0.069	0.27	1,050	EKYA100E□□122MH20D	100	8 × 11.5	0.17	0.68	555	EKYA500E□□100MHB5D	
1,200		10 × 16	0.060	0.24	1,300	EKYA100E□□122MJ16S	150	8 × 15	0.12	0.48	730	EKYA500E□□151MH15D	
1,800		10 × 20	0.046	0.18	1,400	EKYA100E□□182MJ20S	180	8 × 20	0.091	0.36	910	EKYA500E□□181MH20D	
2,200		10 × 25	0.042	0.17	1,650	EKYA100E□□222MJ25S	180	10 × 12.5	0.12	0.48	760	EKYA500E□□181MJC5S	
3,300		12.5 × 20	0.035	0.12	1,900	EKYA100E□□332MK20S	220	10 × 16	0.084	0.34	1,050	EKYA500E□□221MJ16S	
3,900		12.5 × 25	0.027	0.089	2,230	EKYA100E□□392MK25S	330	10 × 20	0.060	0.24	1,220	EKYA500E□□331MJ20S	
6,800		16 × 25	0.021	0.060	2,930	EKYA100E□□682ML25S	470	10 × 25	0.055	0.22	1,440	EKYA500E□□471MJ25S	
10,000		16 × 31.5	0.017	0.050	3,450	EKYA100E□□103MLN3S	560	12.5 × 20	0.045	0.15	1,660	EKYA500E□□561MK20S	
12,000		16 × 35.5	0.015	0.044	3,610	EKYA100E□□123MLP1S	820	12.5 × 25	0.034	0.11	1,950	EKYA500E□□821MK25S	
16		100	5 × 11	0.40	1.6	250	EKYA160E□□101ME11D	1,200	16 × 25	0.025	0.075	2,555	EKYA500E□□122ML25S
	270	6.3 × 11	0.22	0.87	400	EKYA160E□□271MF11D	1,800	16 × 31.5	0.022	0.066	3,010	EKYA500E□□182MLN3S	
	470	8 × 11.5	0.13	0.52	640	EKYA160E□□471MHB5D	2,200	16 × 35.5	0.019	0.057	3,150	EKYA500E□□222MLP1S	
	680	8 × 15	0.087	0.35	840	EKYA160E□□681MH15D	15	5 × 11	0.88	3.5	173	EKYA630E□□150ME11D	
	680	10 × 12.5	0.080	0.32	865	EKYA160E□□681MJC5S	33	6.3 × 11	0.35	1.4	278	EKYA630E□□330MF11D	
	820	8 × 20	0.069	0.27	1,050	EKYA160E□□821MH20D	56	8 × 11.5	0.22	0.88	500	EKYA630E□□560MHB5D	
	1,000	10 × 16	0.060	0.24	1,300	EKYA160E□□102MJ16S	82	8 × 15	0.16	0.64	665	EKYA630E□□820MH15D	
	1,500	10 × 20	0.046	0.18	1,400	EKYA160E□□152MJ20S	100	10 × 12.5	0.11	0.44	725	EKYA630E□□101MJC5S	
	1,800	10 × 25	0.042	0.17	1,650	EKYA160E□□182MJ25S	120	8 × 20	0.12	0.48	820	EKYA630E□□121MH20D	
	2,200	12.5 × 20	0.035	0.12	1,900	EKYA160E□□222MK20S	120	10 × 16	0.076	0.31	950	EKYA630E□□121MJ16S	
	3,300	12.5 × 25	0.027	0.089	2,230	EKYA160E□□332MK25S	220	10 × 20	0.056	0.23	1,200	EKYA630E□□221MJ20S	
	5,600	16 × 25	0.021	0.060	2,930	EKYA160E□□562ML25S	330	10 × 25	0.046	0.19	1,350	EKYA630E□□331MJ25S	
	8,200	16 × 31.5	0.017	0.050	3,450	EKYA160E□□822MLN3S	390	12.5 × 20	0.041	0.13	1,570	EKYA630E□□391MK20S	
	10,000	16 × 35.5	0.015	0.044	3,610	EKYA160E□□103MLP1S	560	12.5 × 25	0.031	0.093	1,990	EKYA630E□□561MK25S	
	25	68	5 × 11	0.40	1.6	250	EKYA250E□□680ME11D	1,000	16 × 25	0.025	0.075	2,730	EKYA630E□□102ML25S
150		6.3 × 11	0.22	0.87	400	EKYA250E□□151MF11D	1,200	16 × 31.5	0.021	0.066	2,850	EKYA630E□□122MLN3S	
330		8 × 11.5	0.13	0.52	640	EKYA250E□□331MHB5D	1,500	16 × 35.5	0.019	0.057	2,900	EKYA630E□□152MLP1S	
390		8 × 15	0.087	0.35	840	EKYA250E□□391MH15D	6.8	5 × 11	1.4	5.6	125	EKYA101E□□6R8ME11D	
470		10 × 12.5	0.080	0.32	865	EKYA250E□□471MJC5S	15	6.3 × 11	0.57	2.3	205	EKYA101E□□150MF11D	
560		8 × 20	0.069	0.27	1,050	EKYA250E□□561MH20D	27	8 × 11.5	0.36	1.4	355	EKYA101E□□270MHB5D	
680		10 × 16	0.060	0.24	1,300	EKYA250E□□681MJ16S	39	8 × 15	0.25	1.0	450	EKYA101E□□390MH15D	
1,000		10 × 20	0.046	0.18	1,400	EKYA250E□□102MJ20S	47	10 × 12.5	0.17	0.66	480	EKYA101E□□470MJC5S	
1,200		10 × 25	0.042	0.17	1,650	EKYA250E□□122MJ25S	56	8 × 20	0.19	0.76	565	EKYA101E□□560MH20D	
1,500		12.5 × 20	0.035	0.12	1,900	EKYA250E□□152MK20S	68	10 × 16	0.11	0.47	600	EKYA101E□□680MJ16S	
2,200		12.5 × 25	0.027	0.089	2,230	EKYA250E□□222MK25S	100	10 × 20	0.084	0.34	800	EKYA101E□□101MJ20S	
3,900		16 × 25	0.021	0.060	2,930	EKYA250E□□392ML25S	150	10 × 25	0.069	0.28	900	EKYA101E□□151MJ25S	
4,700		16 × 31.5	0.017	0.050	3,450	EKYA250E□□472MLN3S	180	12.5 × 20	0.062	0.18	1,100	EKYA101E□□181MK20S	
5,600		16 × 35.5	0.015	0.044	3,610	EKYA250E□□562MLP1S	220	12.5 × 25	0.047	0.14	1,250	EKYA101E□□221MK25S	
35		47	5 × 11	0.40	1.6	250	EKYA350E□□470ME11D	330	16 × 25	0.038	0.12	1,700	EKYA101E□□331ML25S
	100	6.3 × 11	0.22	0.87	400	EKYA350E□□101MF11D	470	16 × 31.5	0.032	0.095	1,850	EKYA101E□□471MLN3S	
	220	8 × 11.5	0.13	0.52	640	EKYA350E□□221MHB5D	560	16 × 35.5	0.029	0.086	2,000	EKYA101E□□561MLP1S	

□ : Enter the appropriate lead forming or taping code.

**KYA Series**

◆**RATED RIPPLE CURRENT MULTIPLIERS**

●Frequency Multipliers

Capacitance (μF)	Frequency (Hz)	120	1k	10k	100k
1.0 to 180		0.40	0.75	0.90	1.00
220 to 560		0.50	0.85	0.94	1.00
680 to 1,800		0.60	0.87	0.95	1.00
2,200 to 3,900		0.75	0.90	0.95	1.00
4,700 to		0.85	0.95	0.98	1.00

The endurance of capacitors is reduced with internal heating produced by ripple current at the rate of halving the lifetime with every 5°C rise.

When long life performance is required in actual use, the rms ripple current has to be reduced.

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)