


ALUMINUM ELECTROLYTIC CAPACITORS

CD Chip Type, Low Impedance series



- Chip type, low impedance temperature range up to +105°C.
- Designed for surface mounting on high density PC board.
- Applicable to automatic mounting machine fed with carrier tape.
- Compliant to the RoHS directive (2002/95/EC).




Specifications


Item	Performance Characteristics																																								
Category Temperature Range	- 55 to +105°C																																								
Rated Voltage Range	6.3 to 100V																																								
Rated Capacitance Range	1 to 3300μF																																								
Capacitance Tolerance	± 20% at 120Hz, 20°C																																								
Leakage Current	After 2 minutes' application of rated voltage, leakage current is not more than 0.01 CV or 3 (μA), whichever is greater.																																								
Tangent of loss angle (tan δ)	Measurement frequency : 120Hz at 20°C																																								
	<table border="1"> <tr> <td>Rated voltage (V)</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>80</td> <td>100</td> </tr> <tr> <td>tan δ (MAX.)</td> <td>0.26</td> <td>0.19</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> <td>0.08</td> <td>0.08</td> <td>0.07</td> </tr> </table> <p>For capacitance of more than 1000μF, add 0.02 for every increase of 1000μF.</p>	Rated voltage (V)	6.3	10	16	25	35	50	63	80	100	tan δ (MAX.)	0.26	0.19	0.16	0.14	0.12	0.10	0.08	0.08	0.07																				
Rated voltage (V)	6.3	10	16	25	35	50	63	80	100																																
tan δ (MAX.)	0.26	0.19	0.16	0.14	0.12	0.10	0.08	0.08	0.07																																
Stability at Low Temperature	Measurement frequency : 120Hz																																								
	<table border="1"> <tr> <td>Rated voltage (V)</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>80</td> <td>100</td> </tr> <tr> <td>Impedance ratio Z—25°C / Z+20°C</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>ZT / Z20 (MAX.) Z—40°C / Z+20°C</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> </tr> <tr> <td>Z—55°C / Z+20°C</td> <td>4</td> <td>4</td> <td>4</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> </tr> </table>	Rated voltage (V)	6.3	10	16	25	35	50	63	80	100	Impedance ratio Z—25°C / Z+20°C	2	2	2	2	2	2	2	2	2	ZT / Z20 (MAX.) Z—40°C / Z+20°C	3	3	3	3	3	3	3	3	3	Z—55°C / Z+20°C	4	4	4	3	3	3	3	3	3
	Rated voltage (V)	6.3	10	16	25	35	50	63	80	100																															
Impedance ratio Z—25°C / Z+20°C	2	2	2	2	2	2	2	2	2																																
ZT / Z20 (MAX.) Z—40°C / Z+20°C	3	3	3	3	3	3	3	3	3																																
Z—55°C / Z+20°C	4	4	4	3	3	3	3	3	3																																
Endurance	<p>The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 5000 hours (2000 hours for L < 10 mm: 50V or less, and for L ≤ 10mm: 63V or more) at 105°C.</p> <table border="1"> <tr> <td>Capacitance Change</td> <td>Within ± 30% of the initial capacitance value</td> </tr> <tr> <td>tan δ</td> <td>200% or less than the initial specified value 300% or less than the initial specified value for 63V or more</td> </tr> <tr> <td>Leakage current</td> <td>Less than or equal to the initial specified value</td> </tr> </table>	Capacitance Change	Within ± 30% of the initial capacitance value	tan δ	200% or less than the initial specified value 300% or less than the initial specified value for 63V or more	Leakage current	Less than or equal to the initial specified value																																		
Capacitance Change	Within ± 30% of the initial capacitance value																																								
tan δ	200% or less than the initial specified value 300% or less than the initial specified value for 63V or more																																								
Leakage current	Less than or equal to the initial specified value																																								
Shelf Life	<p>After storing the capacitors under no load at 105°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.</p>																																								
Resistance to soldering heat	<p>The capacitors are kept on a hot plate for 30 seconds, which is maintained at 250°C. The capacitors shall meet the characteristic requirements listed at right when they are removed from the plate and restored to 20°C.</p> <table border="1"> <tr> <td>Capacitance Change</td> <td>Within ± 10% of the initial capacitance value</td> </tr> <tr> <td>tan δ</td> <td>Less than or equal to the initial specified value</td> </tr> <tr> <td>Leakage current</td> <td>Less than or equal to the initial specified value</td> </tr> </table>	Capacitance Change	Within ± 10% of the initial capacitance value	tan δ	Less than or equal to the initial specified value	Leakage current	Less than or equal to the initial specified value																																		
Capacitance Change	Within ± 10% of the initial capacitance value																																								
tan δ	Less than or equal to the initial specified value																																								
Leakage current	Less than or equal to the initial specified value																																								
Marking	Black print on the case top.																																								

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Chip Type

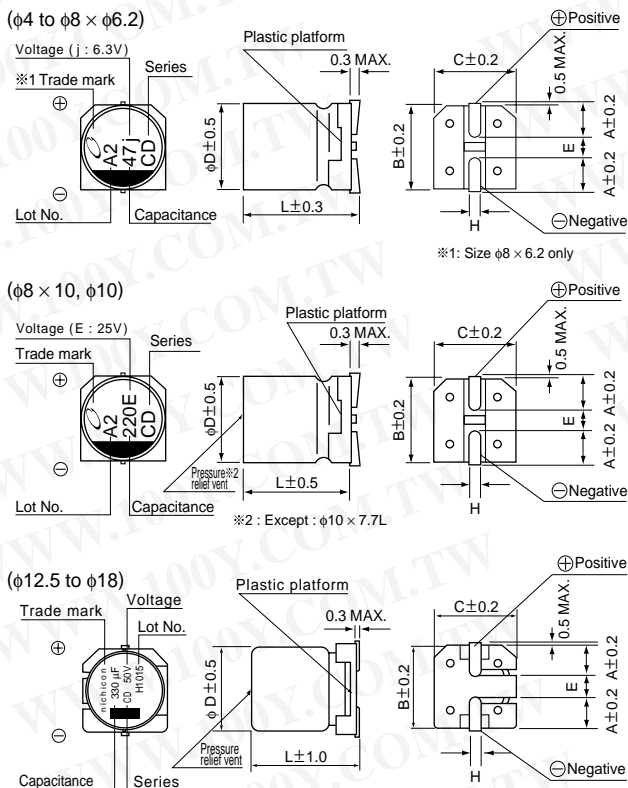

Type numbering system (Example : 16V 100μF)

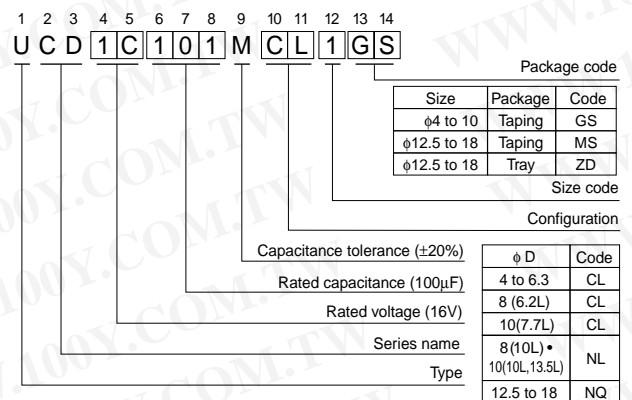

φD×L	4×5.8	5×5.8	6.3×5.8	6.3×7.7	8×6.2	8×10	10×7.7	10×10
A	1.8	2.1	2.4	2.4	3.3	2.9	3.2	3.2
B	4.3	5.3	6.6	6.6	8.3	8.3	10.3	10.3
C	4.3	5.3	6.6	6.6	8.3	8.3	10.3	10.3
E	1.0	1.3	2.2	2.2	2.3	3.1	4.5	4.5
L	5.8	5.8	5.8	7.7	6.2	10	7.7	10
H	0.5 to 0.8	0.5 to 0.8	0.5 to 0.8	0.5 to 0.8	0.5 to 0.8	0.8 to 1.1	0.8 to 1.1	0.8 to 1.1

φD×L	10×13.5	12.5×13.5	16×16.5	18×16.5
A	3.2	4.8	5.4	6.4
B	10.3	13.6	17.1	19.1
C	10.3	13.6	17.1	19.1
E	4.5	4.0	6.3	6.3
L	13.5	13.5	16.5	16.5
H	0.8 to 1.1	1.0 to 1.4	1.0 to 1.4	1.0 to 1.4

Voltage	V	6.3	10	16	25	35	50	63	80	100
Code	j	A	C	E	V	H	J	K	2A	

• Dimension table in next page.

ALUMINUM ELECTROLYTIC CAPACITORS

CD series

■ Dimensions

V Cap. (μF)	Code	6.3			10			16			25			35			50		
		0J			1A			1C			1E			1V			1H		
1	010																4 × 5.8	2.70	60
2.2	2R2																4 × 5.8	2.70	60
3.3	3R3																4 × 5.8	2.70	60
4.7	4R7													4 × 5.8	1.35	90	4 × 5.8	2.70	60
10	100							4 × 5.8	1.35	90	4 × 5.8	1.35	90	● 4 × 5.8	1.35	90	● 5 × 5.8	1.50	90
15	150							4 × 5.8	1.35	90	5 × 5.8	0.70	160	5 × 5.8	0.70	160	6.3 × 5.8	0.86	170
22	220	4 × 5.8	1.35	90	4 × 5.8	1.35	90	● 4 × 5.8	1.35	90	5 × 5.8	0.70	160	5 × 5.8	0.70	160	6.3 × 5.8	0.86	170
27	270	4 × 5.8	1.35	90	5 × 5.8	0.70	160	5 × 5.8	0.70	160	6.3 × 5.8	0.36	240	6.3 × 5.8	0.36	240			
33	330	5 × 5.8	0.70	160	● 4 × 5.8	1.35	90	6.3 × 5.8	0.36	240	● 5 × 5.8	0.70	160	6.3 × 5.8	0.36	240	6.3 × 7.7	0.66	195
47	470	● 4 × 5.8	1.35	90	6.3 × 5.8	0.36	240	● 5 × 5.8	0.70	160	6.3 × 5.8	0.36	240	6.3 × 5.8	0.36	240	6.3 × 7.7	0.66	195
56	560	5 × 5.8	0.70	160	6.3 × 5.8	0.36	240	6.3 × 5.8	0.36	240	6.3 × 5.8	0.36	240	6.3 × 5.8	0.36	240	● 8 × 6.2	0.63	200
68	680	6.3 × 5.8	0.36	240	6.3 × 5.8	0.36	240	6.3 × 5.8	0.36	240	6.3 × 5.8	0.36	240	6.3 × 5.8	0.36	240			
100	101	● 5 × 5.8	0.70	160	6.3 × 5.8	0.36	240	6.3 × 5.8	0.36	240	6.3 × 7.7	0.32	290	● 6.3 × 7.7	0.32	290	8 × 10	0.32	350
150	151	6.3 × 5.8	0.36	240	6.3 × 5.8	0.36	240	6.3 × 7.7	0.32	290	● 8 × 6.2	0.26	300	8 × 10	0.16	600	● 10 × 7.7	0.36	330
220	221	6.3 × 5.8	0.36	240	6.3 × 7.7	0.32	290	● 8 × 6.2	0.26	300	● 10 × 7.7	0.18	600	● 10 × 7.7	0.18	600	10 × 10	0.16	700
330	331	6.3 × 7.7	0.32	290	8 × 10	0.16	600	● 10 × 7.7	0.18	600	8 × 10	0.16	600	8 × 10	0.16	600	● 10 × 13.5	0.14	800
390	391	● 8 × 6.2	0.26	300	● 10 × 7.7	0.18	600	● 10 × 7.7	0.18	600	8 × 10	0.16	600	10 × 10	0.08	850	12.5 × 13.5	0.12	900
470	471	8 × 10	0.16	600	8 × 10	0.16	600	8 × 10	0.16	600	10 × 10	0.08	850	● 10 × 13.5	0.08	950	16 × 16.5	0.073	1610
680	681	● 10 × 7.7	0.18	600	10 × 10	0.08	850	10 × 10	0.08	850	10 × 13.5	0.08	950	12.5 × 13.5	0.08	1100	16 × 16.5	0.073	1610
1000	102	8 × 10	0.16	600	10 × 10	0.08	850	10 × 13.5	0.08	950	12.5 × 13.5	0.08	1100	16 × 16.5	0.035	1800			
1500	152	10 × 10	0.08	850	10 × 13.5	0.08	950	12.5 × 13.5	0.08	1100									
2200	222	10 × 13.5	0.08	950	12.5 × 13.5	0.08	1100				16 × 16.5	0.035	1800				Case size	Impedance	Rated ripple
3300	332	12.5 × 13.5	0.08	1100													φD × L (mm)		

V Cap. (μF)	Code	63			80			100		
		1J			1K			2A		
3.3	3R3				5 × 5.8	5.00	25			
4.7	4R7	5 × 5.8	3.00	50	6.3 × 5.8	3.00	40			
10	100	6.3 × 5.8	1.50	80	6.3 × 7.7	2.40	60			
22	220	● 8 × 6.2	1.20	120	● 8 × 6.2	2.40	60	8 × 10	1.30	130
33	330	8 × 10	0.65	250	8 × 10	1.30	130	10 × 10	0.70	200
47	470	8 × 10	0.65	250	10 × 10	0.70	200	12.5 × 13.5	0.32	500
68	680	10 × 10	0.35	400	12.5 × 13.5	0.32	500	12.5 × 13.5	0.32	500
100	101	10 × 10	0.35	400	12.5 × 13.5	0.32	500	16 × 16.5	0.17	793
150	151	12.5 × 13.5	0.16	800	12.5 × 13.5	0.32	500	16 × 16.5	0.17	793
220	221	12.5 × 13.5	0.16	800				18 × 16.5	0.15	917
330	331				16 × 16.5	0.17	793	18 × 16.5	0.15	917
470	471	16 × 16.5	0.082	1410	18 × 16.5	0.15	917	Case size	Impedance	Rated ripple
680	681	18 × 16.5	0.08	1690				φD × L (mm)		

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Max. Impedance (Ω) at 20°C 100kHz, Rated ripple current (mA rms) at 105°C 100kHz
 ●: In this case, [] will be put at 12th digit of type numbering system.

● Frequency coefficient of rated ripple current

Frequency	50Hz	120Hz	300Hz	1kHz	10kHz or more
Coefficient	0.35	0.50	0.64	0.83	1.00

- Taping specifications are given in page 23.
- Recommended land size, soldering by reflow are given in page 18, 19.
- Please refer to page 3 for the minimum order quantity.