


## Diode Modules


勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
 Http://www.100y.com.tw

$I_{FRMS} = 2x 100 A$   
 $I_{FAVM} = 2x 64 A$   
 $V_{RRM} = 800-1800 V$

$V_{RSM}$ V	$V_{RRM}$ V	Type
900	800	MDD 44-08N1 B
1300	1200	MDD 44-12N1 B
1500	1400	MDD 44-14N1 B
1700	1600	MDD 44-16N1 B
1900	1800	MDD 44-18N1 B



TO-240 AA



Symbol	Test Conditions	Maximum Ratings
$I_{FRMS}$	$T_{VJ} = T_{VJM}$	100 A
$I_{FAVM}$	$T_C = 92^\circ C; 180^\circ$ sine	64 A
	$T_C = 100^\circ C; 180^\circ$ sine	59 A
$I_{FSM}$	$T_{VJ} = 45^\circ C; V_R = 0$	t = 10 ms (50 Hz), sine 1150 A t = 8.3 ms (60 Hz), sine 1300 A
	$T_{VJ} = T_{VJM}; V_R = 0$	t = 10 ms (50 Hz), sine 1000 A t = 8.3 ms (60 Hz), sine 1200 A
$\int i^2 dt$	$T_{VJ} = 45^\circ C; V_R = 0$	t = 10 ms (50 Hz), sine 6600 A <sup>2</sup> s t = 8.3 ms (60 Hz), sine 7000 A <sup>2</sup> s
	$T_{VJ} = T_{VJM}; V_R = 0$	t = 10 ms (50 Hz), sine 5000 A <sup>2</sup> s t = 8.3 ms (60 Hz), sine 5950 A <sup>2</sup> s
$T_{VJ}$		-40...+150 °C
$T_{VJM}$		150 °C
$T_{stg}$		-40...+125 °C
$V_{ISOL}$	50/60 Hz, RMS	t = 1 min 3000 V~
	$I_{ISOL} \leq 1 mA$	t = 1 s 3600 V~
$M_d$	Mounting torque (M5)	2.5-4/22-35 Nm/lb.in.
	Terminal connection torque (M5)	2.5-4/22-35 Nm/lb.in.
Weight	Typical including screws	90 g

### Features

- International standard package JEDEC TO-240 AA
- Direct copper bonded Al<sub>2</sub>O<sub>3</sub> -ceramic base plate
- Planar passivated chips
- Isolation voltage 3600 V~
- UL registered, E 72873

### Applications


- Supplies for DC power equipment
- DC supply for PWM inverter
- Field supply for DC motors
- Battery DC power supplies

### Advantages

- Space and weight savings
- Simple mounting
- Improved temperature and power cycling
- Reduced protection circuits

Symbol	Test Conditions	Characteristic Values
$I_R$	$T_{VJ} = T_{VJM}; V_R = V_{RRM}$	10 mA
$V_F$	$I_F = 200 A; T_{VJ} = 25^\circ C$	1.60 V
$V_{T0}$	For power-loss calculations only	0.8 V
$r_T$	$T_{VJ} = T_{VJM}$	4.3 mΩ
$Q_S$	$T_{VJ} = 125^\circ C; I_F = 50 A, -di/dt = 0.64 A/\mu s$	90 μC
$I_{RM}$		11 A
$R_{thJC}$	per diode; DC current	0.59 K/W
	per module	0.295 K/W
$R_{thJK}$	per diode; DC current	0.79 K/W
	per module	0.395 K/W
$d_s$	Creepage distance on surface	12.7 mm
$d_A$	Strike distance through air	9.6 mm
$a$	Maximum allowable acceleration	50 m/s <sup>2</sup>

### Dimensions in mm (1 mm = 0.0394")

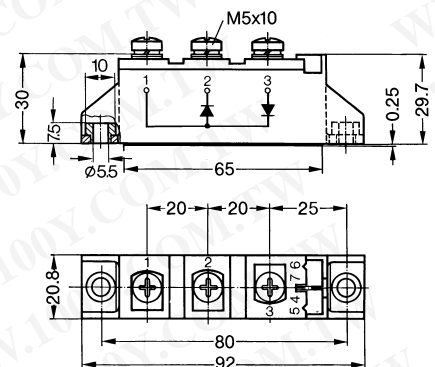

Data according to IEC 60747 and refer to a single diode unless otherwise stated. IXYS reserves the right to change limits, test conditions and dimensions

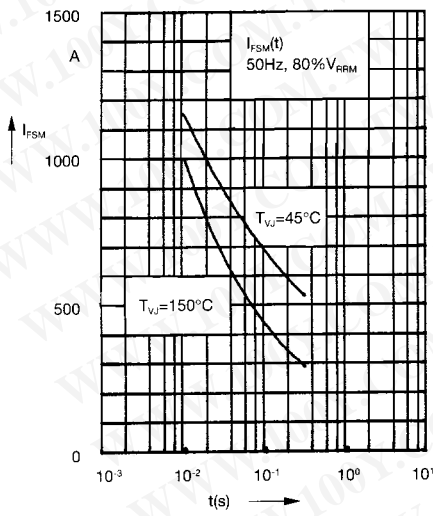


Fig. 1 Surge overload current  
 $I_{FSM}$ : Crest value,  $t$ : duration

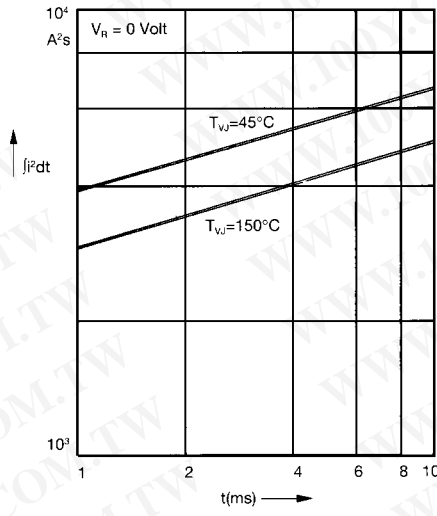


Fig. 2  $j^2dt$  versus time (1-10 ms)

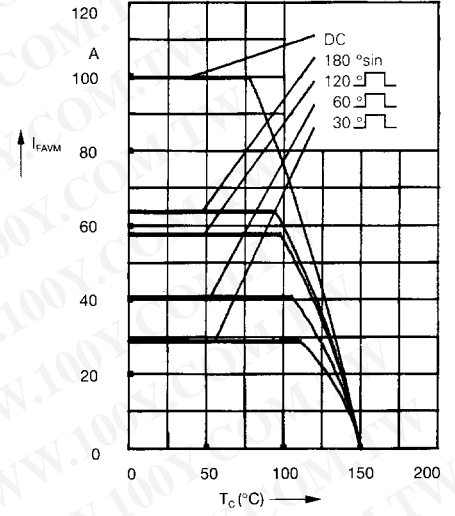


Fig. 2a Maximum forward current at case temperature

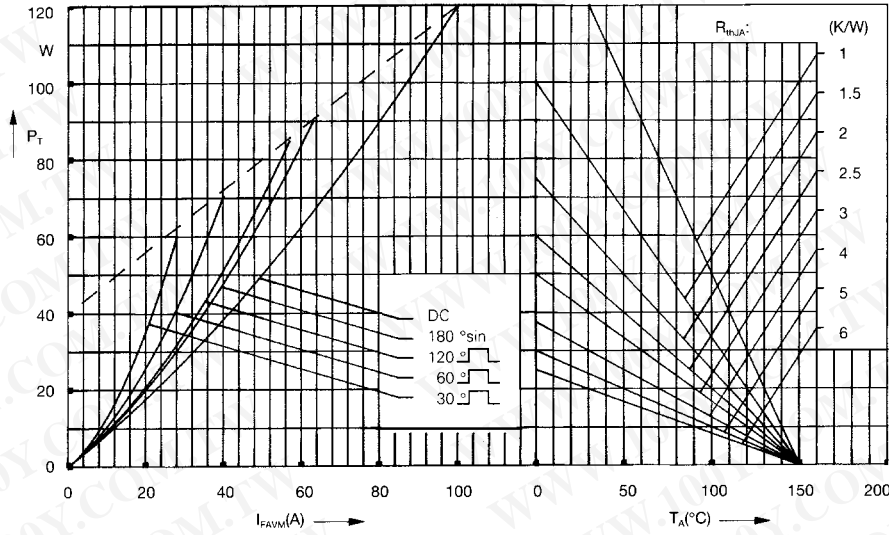


Fig. 3 Power dissipation versus forward current and ambient temperature (per diode)

**勝特力材料 886-3-5753170**  
**勝特力电子(上海) 86-21-34970699**  
**勝特力电子(深圳) 86-755-83298787**  
[Http://www.100y.com.tw](http://www.100y.com.tw)

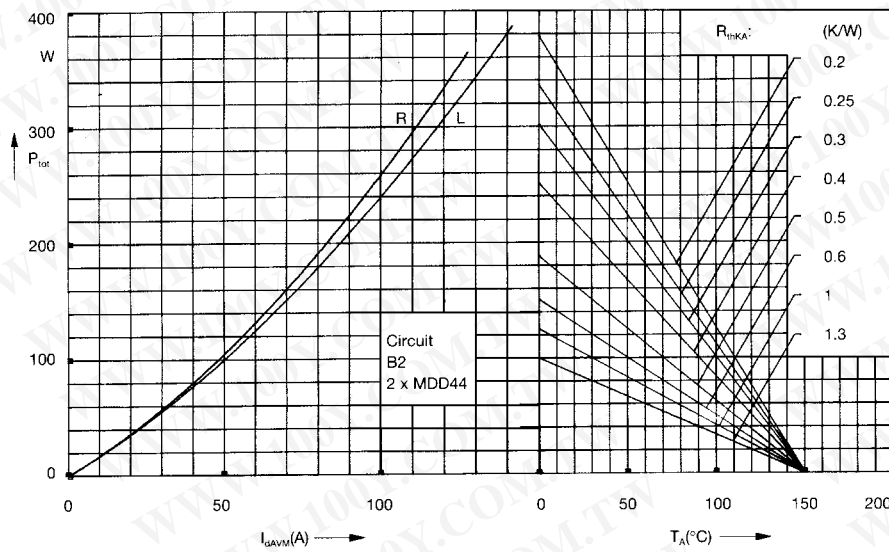


Fig. 4 Single phase rectifier bridge:  
 Power dissipation versus direct output current and ambient temperature  
 R = resistive load  
 L = inductive load

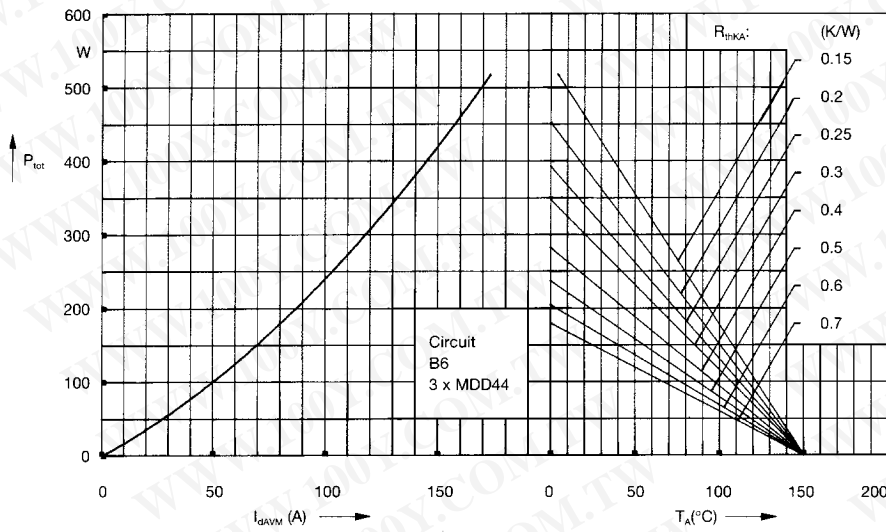


Fig. 5 Three phase rectifier bridge: Power dissipation versus direct output current and ambient temperature

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

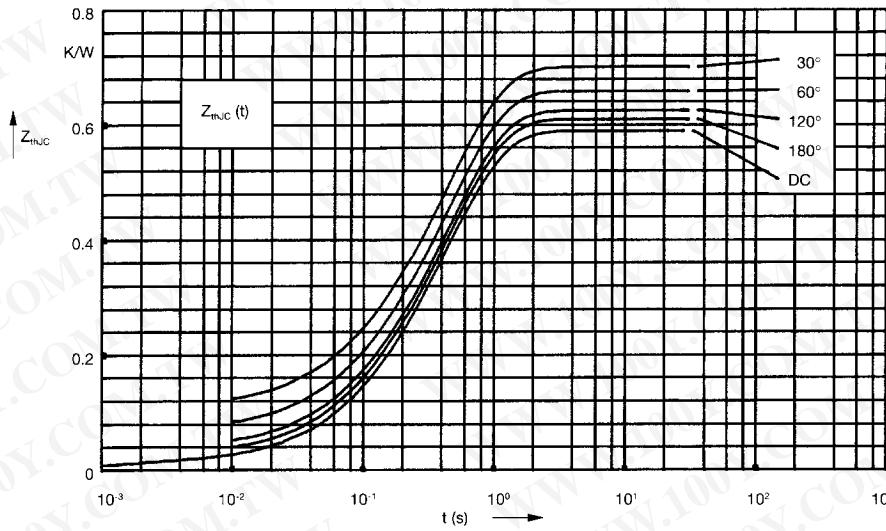


Fig. 6 Transient thermal impedance junction to case (per diode)

$R_{thJC}$  for various conduction angles d:

d	$R_{thJC}$ (K/W)
DC	0.59
180°	0.61
120°	0.63
60°	0.66
30°	0.70

Constants for  $Z_{thJC}$  calculation:

i	$R_{thi}$ (K/W)	$t_i$ (s)
1	0.012	0.0012
2	0.045	0.095
3	0.533	0.455

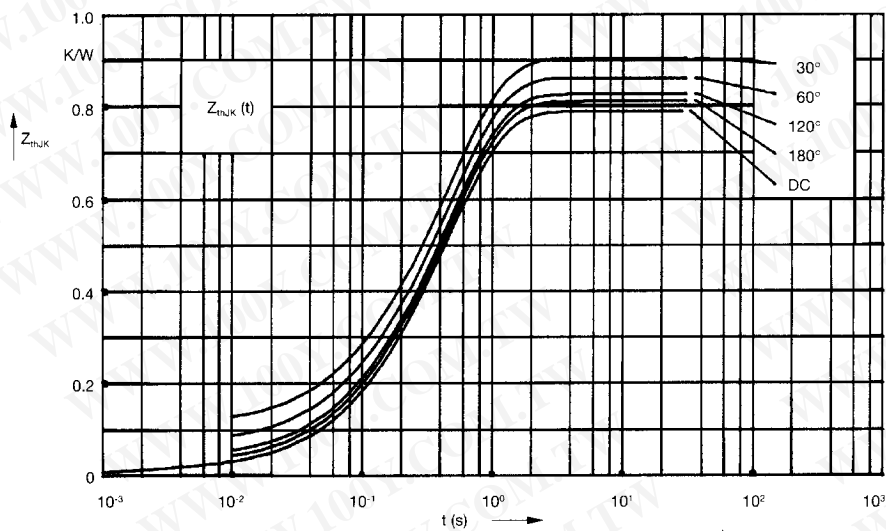


Fig. 7 Transient thermal impedance junction to heatsink (per diode)

$R_{thJK}$  for various conduction angles d:

d	$R_{thJK}$ (K/W)
DC	0.79
180°	0.81
120°	0.83
60°	0.86
30°	0.90

Constants for  $Z_{thJK}$  calculation:

i	$R_{thi}$ (K/W)	$t_i$ (s)
1	0.012	0.0012
2	0.045	0.095
3	0.533	0.455
4	0.2	0.495