

UM

Radial Lead Type, High Voltage

series

- High voltage type (2.7V).
- Suitable for quick charge and discharge.
- Wide temperature range (– 25 to +70°C).
- Compliant to the RoHS directive (2011/65/EU).


UM

Smaller
UW

■ Specifications


Item	Performance Characteristics	
Category Temperature Range	– 25 to +70°C	
Rated Voltage Range	2.7V	
Rated Capacitance Range	0.47 to 47F See Note	
Capacitance Tolerance	±20% , 20°C	
Leakage Current	0.5C (mA) [C : Rated Capacitance(F)] (After 30 minutes' application of rated voltage : 2.7V)	
Stability at Low Temperature	Capacitance (– 25°C) / Capacitance (+20°C) ×100 ≥ 70%	
ESR, DCR*	Refer to the table below (20°C). *DC internal resistance	
Endurance	The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 1000 hours at 70°C.	Capacitance change Within ±30% of the initial capacitance value
		ESR 300% or less than the initial specified value
		Leakage current Less than or equal to the initial specified value
Shelf Life	The specifications listed at right shall be met when the capacitors are restored to 20°C after storing the capacitors under no load for 1000 hours at 70°C.	Capacitance change Within ±30% of the initial capacitance value
		ESR 300% or less than the initial specified value
		Leakage current Less than or equal to the initial specified value
Marking	Printed with white color letter on black sleeve.	

■ Drawing

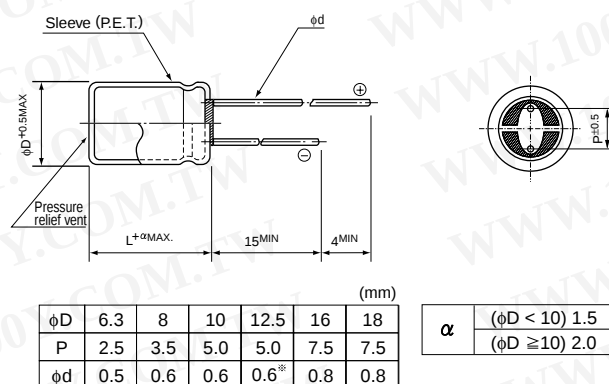

• Please refer to page 20 for end seal configuration.

Type numbering system (Example : 2.7V 10F)

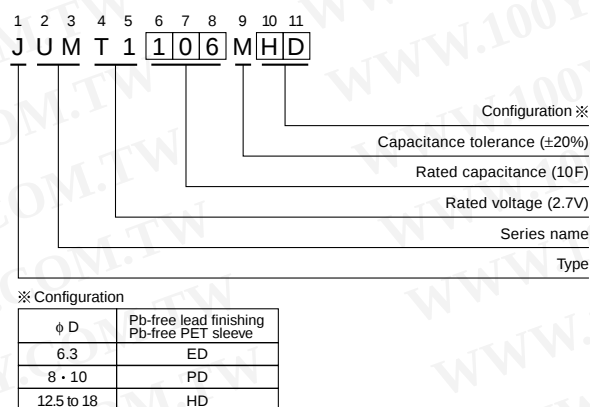

■ Dimensions

Rated Voltage (Code)	Rated Capacitance (F)	Code	ESR (Ω) (at 1kHz)	DCR※ Typical (Ω)	Case size φ D × L (mm)
2.7V (T1)	0.47	474	4	6	6.3 × 9
	1	105	2	3	8 × 11.5
	2.2	225	2	1.3	8 × 20
	3.3	335	1	1.0	10 × 20
	4.7	475	0.4	0.6	12.5 × 20
	10	106	0.2	0.25	12.5 × 31.5
	22	226	0.2	0.13	16 × 31.5
	33	336	0.1	0.08	18 × 31.5
	47	476	0.1	0.06	18 × 40

※ The listed DCR value is typical and therefore not a guaranteed value.

Note :

The capacitance calculated from discharge time (ΔT) with constant current (i) after 30minute charge with rated voltage (2.7V).

The discharge current (i) is 0.01 × rated capacitance (F).

The discharge time (ΔT) measured between 2V and 1V with constant current.

The capacitance calculated below.

$$\text{Capacitance (F)} = i \times \Delta T$$

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)