



## BUL3P5

### MEDIUM VOLTAGE FAST-SWITCHING PNP POWER TRANSISTOR

#### Features

- MEDIUM VOLTAGE CAPABILITY
- LOW SPREAD OF DYNAMIC PARAMETERS
- MINIMUM LOT-TO-LOT SPREAD FOR RELIABLE OPERATION
- VERY HIGH SWITCHING SPEED

#### Applications


- ELECTRONIC BALLASTS FOR FLUORESCENT LIGHTING

#### Description

The BUL3P5 is manufactured using high voltage Multi-Epitaxial Planar technology for high switching speeds and medium voltage capability.


It uses a Cellular Emitter structure with planar edge termination to enhance switching speeds while maintaining the wide RBSOA.

The device is expressly designed for a new solution to be used in compact fluorescent lamps, H.F. ballast voltage FED where it is coupled with the BUL3N7, its complementary NPN transistor.

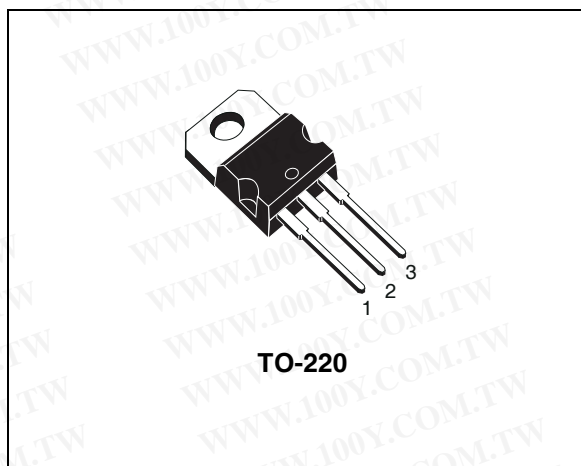

TO-220

#### Internal Schematic Diagram

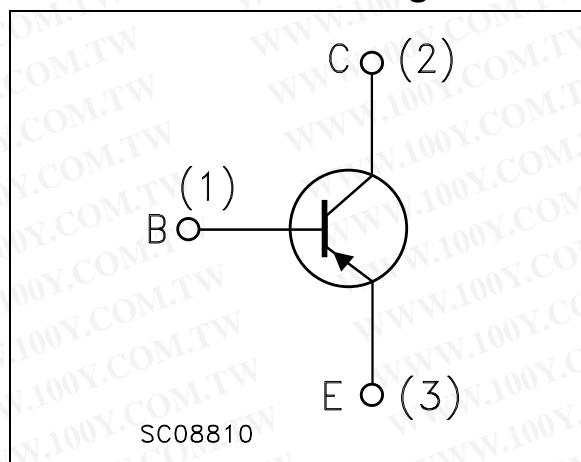

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

#### Order Codes

| Part Number | Marking | Package | Packing |
|-------------|---------|---------|---------|
| BUL3P5      | BUL3P5  | TO-220  | TUBE    |

# 1 Absolute Maximum Ratings

**Table 1. Absolute Maximum Rating**

| Symbol    | Parameter  | Value         | Unit             |
|-----------|--|---------------|------------------|
| $V_{CES}$ | Collector-Emitter Voltage ( $V_{BE} = 0$ )   | -500          | V                |
| $V_{CEO}$ | Collector-Emitter Voltage ( $I_B = 0$ )  | -400          | V                |
| $V_{EBO}$ | Emitter-Base Voltage<br>( $I_C = 0, I_B = -0.75\text{ A}, t_p < 100\text{ms}, T_j < 150^\circ\text{C}$ ) | $V_{(BR)EBO}$ | V                |
| $I_C$     | Collector Current  | -3            | A                |
| $I_{CM}$  | Collector Peak Current ( $t_p < 5\text{ms}$ )  | -6            | A                |
| $I_B$     | Base Current   | -1.5          | A                |
| $I_{BM}$  | Base Peak Current ( $t_p < 5\text{ms}$ )   | -3            | A                |
| $P_{TOT}$ | Total dissipation at $T_c = 25^\circ\text{C}$  | 60            | W                |
| $T_{stg}$ | Storage Temperature  | -65 to 150    | $^\circ\text{C}$ |
| $T_j$     | Max. Operating Junction Temperature  | 150           | $^\circ\text{C}$ |

**Table 2. Thermal Data**

| Symbol         | Parameter                               | Value | Unit               |
|----------------|---|-------|--------------------|
| $R_{thJ-case}$ | Thermal Resistance Junction-Case Max    | 2.08  | $^\circ\text{C/W}$ |
| $R_{thJ-amb}$  | Thermal Resistance Junction-Ambient Max | 62.5  | $^\circ\text{C/W}$ |

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## 2 Electrical Characteristics

**Table 3. Electrical Characteristics** ( $T_{CASE} = 25^{\circ}C$ ; unless otherwise specified)

| Symbol                           | Parameter   | Test Conditions   | Min. | Typ. | Max. | Unit    |
|----------------------------------|---|---|------|------|------|---------|
| $I_{CES}$                        | Collector Cut-off Current<br>( $V_{BE} = 0$ )         | $V_{CE} = -500 V$   |      |      | -0.1 | mA      |
|                                  |   | $V_{CE} = -500 V$ $T_C = 125^{\circ}C$                                    |      |      | -0.5 | mA      |
| $V_{(BR)EBO}$                    | Emitter-Base Breakdown Voltage<br>( $I_C = 0$ )       | $I_E = -10 mA$  | -5   |      | -10  | V       |
| $V_{CEO(sus)}$<br><i>Note: 1</i> | Collector-Emitter<br>Sustaining Voltage ( $I_B = 0$ ) | $I_C = 100 mA$  | -400 |      |      | V       |
| $V_{CE(sat)}$<br><i>Note: 1</i>  | Collector-Emitter Saturation<br>Voltage               | $I_C = -0.7 A$ $I_B = -0.1 A$   |      |      | -0.5 | V       |
|                                  |   | $I_C = -1 A$ $I_B = -0.2 A$   |      |      | -0.5 | V       |
| $V_{BE(sat)}$<br><i>Note: 1</i>  | Base-Emitter Saturation Voltage                       | $I_C = -0.5 A$ $I_B = -0.1 A$   |      |      | -1.1 | V       |
|                                  |   | $I_C = -1 A$ $I_B = -0.2 A$   |      |      | -1.2 | V       |
|                                  |   | $I_C = -2 A$ $I_B = -0.4 A$   |      |      | -1.3 | V       |
| $h_{FE}$                         | DC Current Gain                                       | $I_C = -10 mA$ $V_{CE} = -5 V$  | 10   |      |      |         |
|                                  |   | $I_C = -0.7 A$ $V_{CE} = -5 V$  | 18   |      | 34   |         |
|                                  |   | $I_C = -2 A$ $V_{CE} = -5 V$  | 4    |      |      |         |
| $t_r$<br>$t_s$<br>$t_f$          | RESISTIVE LOAD  |   |      |      |      |         |
|                                  | Rise Time   | $I_C = -0.7 A$ $V_{CC} = -250 V$  |      | 100  |      | ns      |
|                                  | Storage Time  | $I_{B1} = -0.14 A$ $I_{B2} = 0.14 A$                                      |      | 2.4  |      | $\mu s$ |
| $t_s$<br>$t_f$                   | INDUCTIVE LOAD  |   |      |      |      |         |
|                                  | Storage Time  | $I_C = -1 A$ $I_{B1} = -0.2 A$<br>$V_{BE(off)} = 5 V$ $R_{bb} = 0 \Omega$ |      | 450  |      | ns      |
| $t_f$                            | Fall Time   | $L = 1 mH$ $V_{clamp} = 200 V$  |      | 70   |      | ns      |

*Note: 1 Pulsed duration = 300  $\mu s$ , duty cycle  $\leq 1.5\%$ .*

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## 2.1 Typical Characteristics

Figure 1. Safe Operating Area

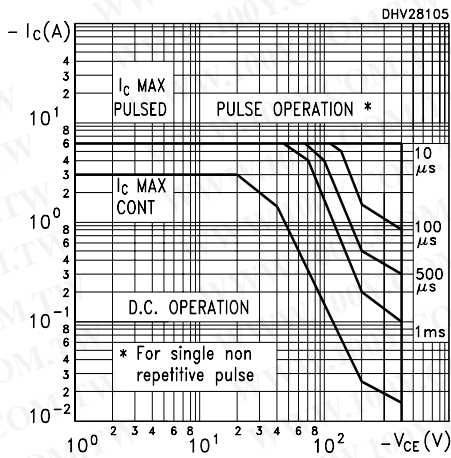


Figure 3. DC Current Gain

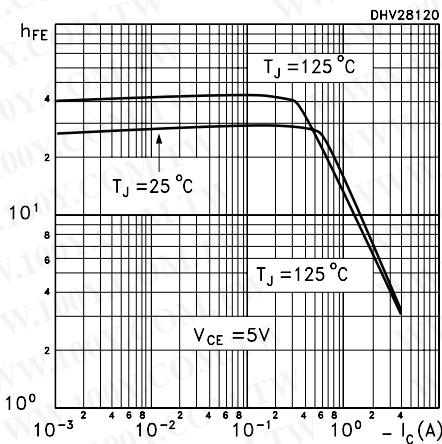


Figure 5. Base Emitter Saturation Voltage

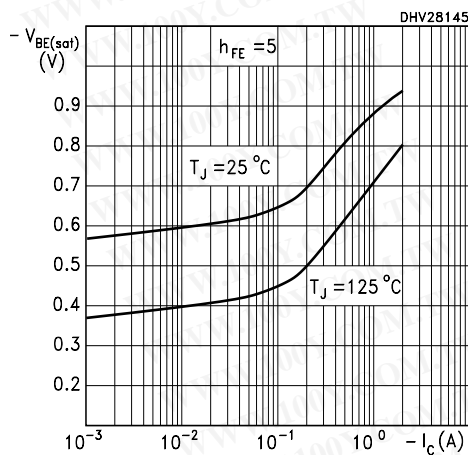


Figure 2. DC Current Gain

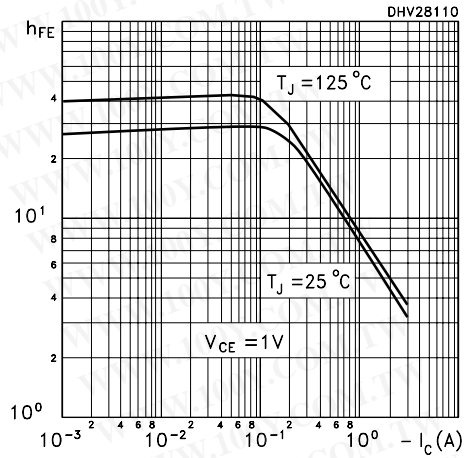


Figure 4. Collector Emitter Saturation Voltage


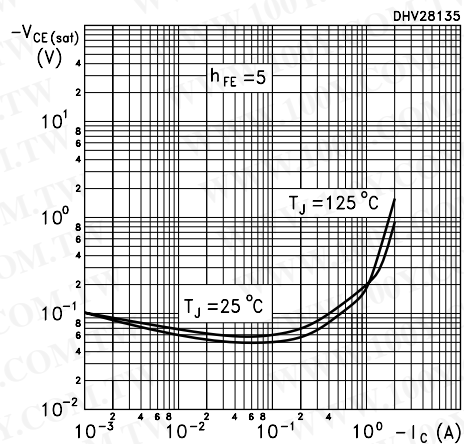


Figure 6. Switching Times Resistive Load

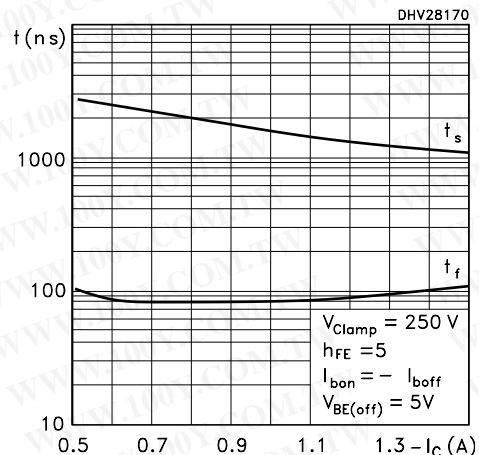

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)



Figure 7. Switching Times Inductive Load


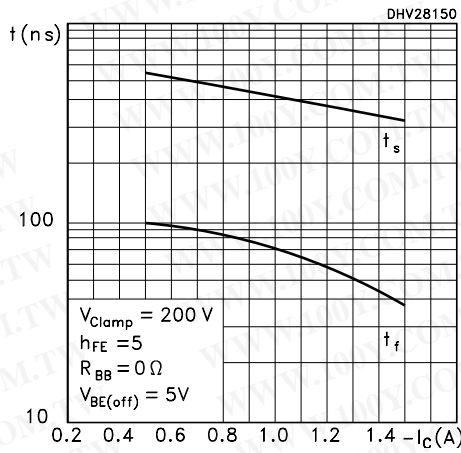


Figure 8. Reverse Biased SOA

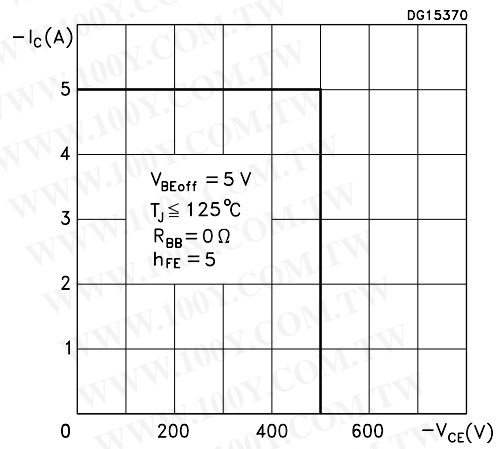

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

### 3 Test Circuits

Figure 9. Inductive Load Switching Test Circuit


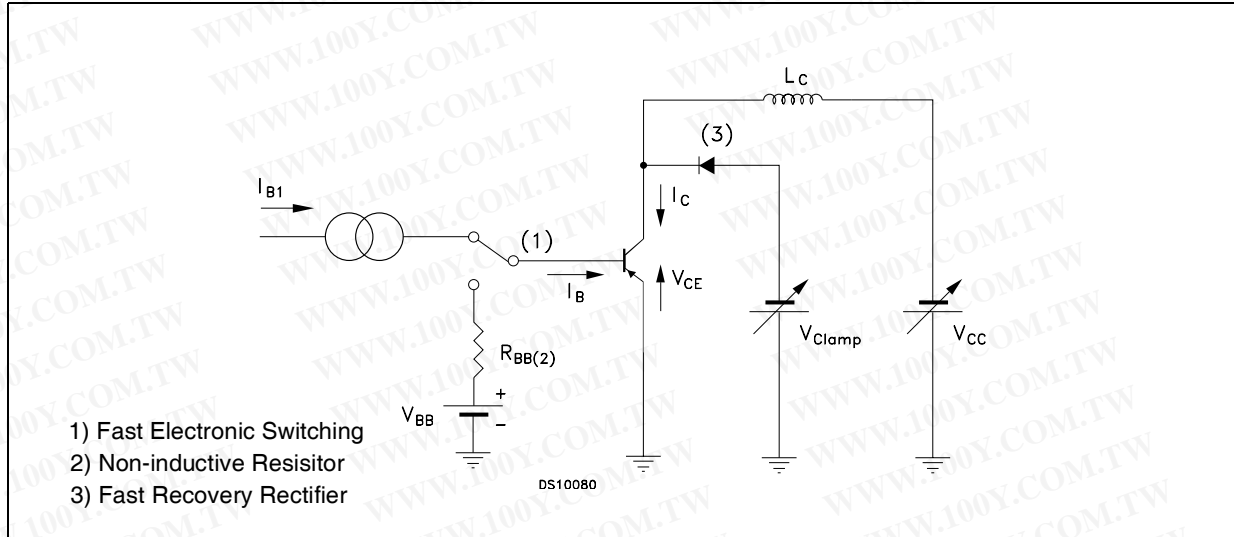


Figure 10. Resistive Load Switching Test Circuits

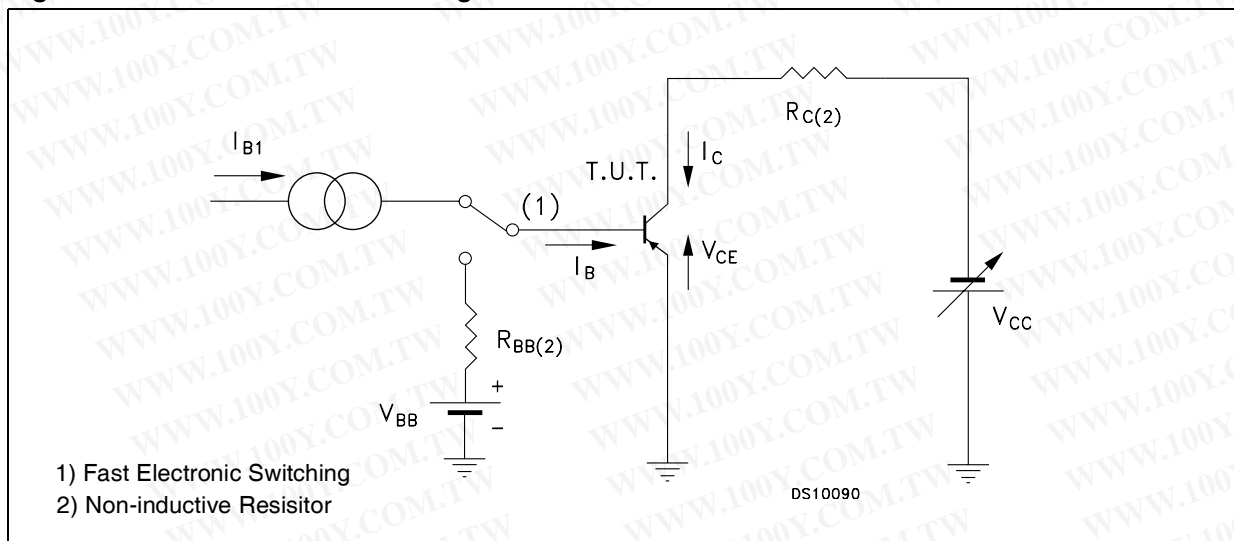

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)


## 4 Package Mechanical Data

In order to meet environmental requirements, ST offers these devices in ECOPACK® packages. These packages have a Lead-free second level interconnect . The category of second level interconnect is marked on the package and on the inner box label, in compliance with JEDEC Standard JESD97. The maximum ratings related to soldering conditions are also marked on the inner box label. ECOPACK is an ST trademark. ECOPACK specifications are available at: [www.st.com](http://www.st.com)

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

TO-220 MECHANICAL DATA

| DIM. | mm.   |       |       | inch  |       |       |
|------|-------|-------|-------|-------|-------|-------|
|      | MIN.  | TYP.  | MAX.  | MIN.  | TYP.  | MAX.  |
| A    | 4.40  |       | 4.60  | 0.173 |       | 0.181 |
| b    | 0.61  |       | 0.88  | 0.024 |       | 0.034 |
| b1   | 1.15  |       | 1.70  | 0.045 |       | 0.066 |
| c    | 0.49  |       | 0.70  | 0.019 |       | 0.027 |
| D    | 15.25 |       | 15.75 | 0.60  |       | 0.620 |
| E    | 10    |       | 10.40 | 0.393 |       | 0.409 |
| e    | 2.40  |       | 2.70  | 0.094 |       | 0.106 |
| e1   | 4.95  |       | 5.15  | 0.194 |       | 0.202 |
| F    | 1.23  |       | 1.32  | 0.048 |       | 0.052 |
| H1   | 6.20  |       | 6.60  | 0.244 |       | 0.256 |
| J1   | 2.40  |       | 2.72  | 0.094 |       | 0.107 |
| L    | 13    |       | 14    | 0.511 |       | 0.551 |
| L1   | 3.50  |       | 3.93  | 0.137 |       | 0.154 |
| L20  |       | 16.40 |       |       | 0.645 |       |
| L30  |       | 28.90 |       |       | 1.137 |       |
| øP   | 3.75  |       | 3.85  | 0.147 |       | 0.151 |
| Q    | 2.65  |       | 2.95  | 0.104 |       | 0.116 |

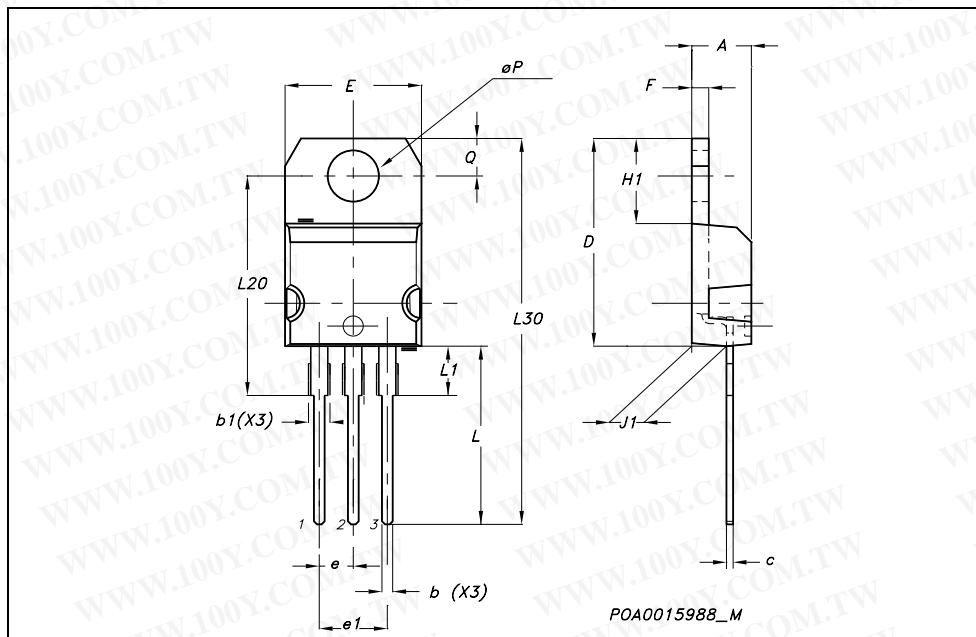



## 5 Revision History

| Date        | Revision | Changes         |
|-------------|----------|-----------------|
| 09-Dec-2005 | 2        | Inserted curves |

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics.  
All other names are the property of their respective owners

© 2005 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

[www.st.com](http://www.st.com)

