


# USB 3.0 A公对B公


勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

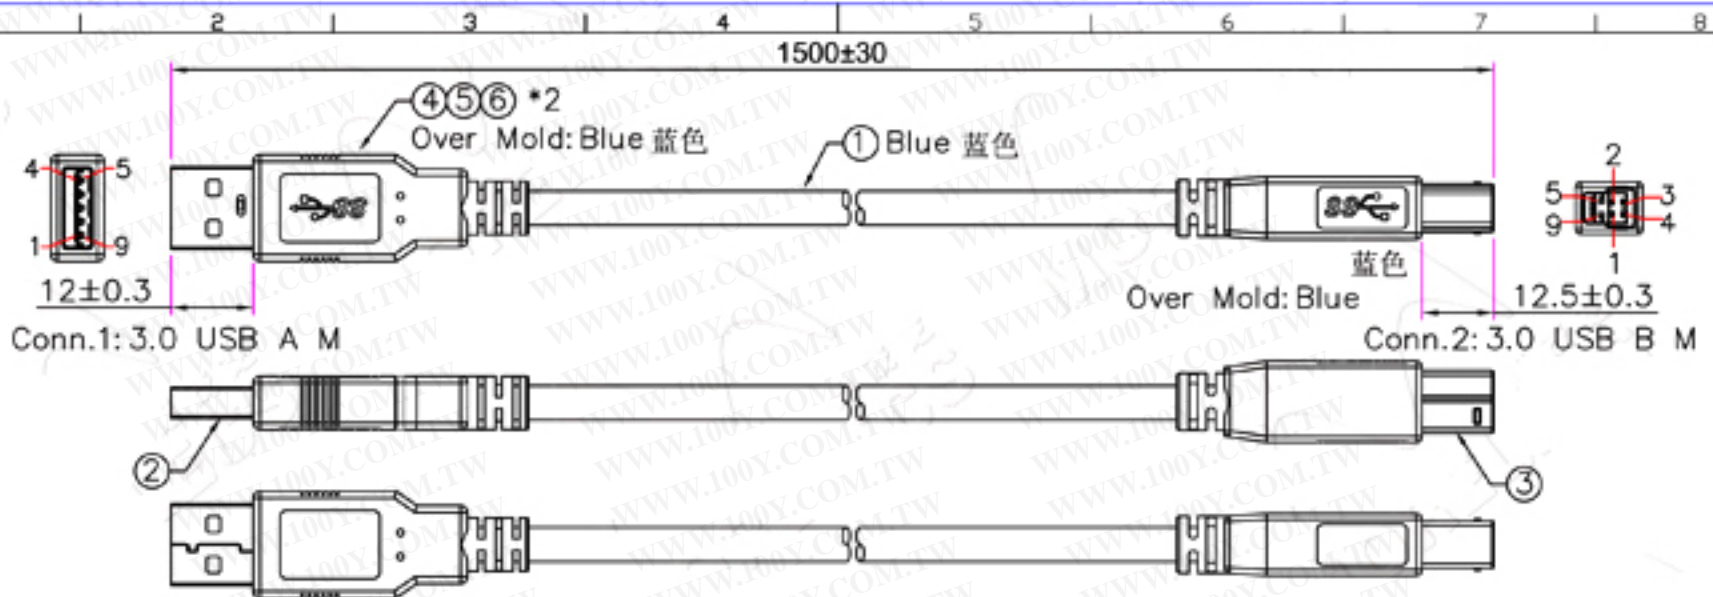

**Note:**

- 1.Electronic Test(Electrical Performance):  
 100% Open & Short & Mis-wire Test  
 Conductive Resistance: 3 OHM Max.  
 Insulation Resistance: 5M OHMS Min.  
 Insulation Voltage: 300V DC/10ms  
 All Test Duability: 0.3SEC.
- 2.RoHS Compliant Certified
- 3.One cable per polybag.

绕线及装袋说明:  
 依上图绕线圈型,上4下3中间扎1根10cm长黑色  
 迷你带,单条装PE袋并热封口,  
 (L200\*W150\*T0.05mm印黑色环保及RoHS标志)



**Wire Diagram**

Conn.1	Wire Color	Conn.2
1	Red	1 红
2	White	2 白
3	Green	3 绿
4	Black	4 黑
5	Blue	5 蓝
6	Yellow	6 黄
7	Drain Wire	7 地线
8	Purple	8 紫
9	Orange	9 橙
Shell	Braid	Shell

6	P0020050	PVC	PVC 45P Blue	14	g
5	M0010010	Tin2	Tin Stick,Lead free	0.05	g
4	M0000020	Tin1	Tin Slim.OD0.6mm	0.2	g
3	C0080020	Conn.2	3.0Ver USB_B M.Blue Insulator.Shell Nickel Plated.Contact Gold Plated	1	Set
2	C0080010	Conn.1	3.0Ver USB_A M.Blue Insulator.Shell Nickel Plated.Contact Gold Plated	1	Set
1	X0000090	Cable	USB3.0 UL20276 (1P130+0+AL+1W)P2C+1P130+2C128+NOE(16/4/0.12 AW) 005.5 Blue	1.49	M
No.	Part No	Titel	Description	Q'ty	Unit

REV	ECN NO.	ECN DESCRIPTION	DATE
A0		Release drawing	2012/05/30

TITLE (DESCRIPTION)				UNIT	SCALE	PART NO	
USB3.0_USB_A M TO USB_B M Cable Molding Type,Black,1.5M				mm	NONE		
APPD.	CKD.	DWG.	DATE	TOLERANCE	DWG. NO	REV.	
				* ±0.3 ** ±0.2	SAM-0083	A0	