




- **Single-Supply Operation:**  
**Input Voltage Range Extends to Ground, and Output Swings to Ground While Sinking Current**
- **Input Offset Voltage 300  $\mu$ V Max at 25°C for LT1014**
- **Offset Voltage Temperature Coefficient 2.5  $\mu$ V/°C Max for LT1014**
- **Input Offset Current 1.5 nA Max at 25°C for LT1014**
- **High Gain 1.2 V/ $\mu$ V Min ( $R_L = 2 \text{ k}\Omega$ ), 0.5 V/ $\mu$ V Min ( $R_L = 600 \Omega$ ) for LT1014**
- **Low Supply Current 2.2 mA Max at 25°C for LT1014**
- **Low Peak-to-Peak Noise Voltage 0.55  $\mu$ V Typ**
- **Low Current Noise 0.07 pA/ $\sqrt{\text{Hz}}$  Typ**

#### description

The LT1014, LT1014A, and LT1014D are quad precision operational amplifiers with 14-pin industry-standard configuration. They feature low offset-voltage temperature coefficient, high gain, low supply current, and low noise.

The LT1014, LT1014A, and LT1014D can be operated with both dual  $\pm 15\text{-V}$  and single 5-V power supplies. The common-mode input voltage range includes ground, and the output voltage can also swing to within a few milivolts of ground. Crossover distortion is eliminated.

The LT1014C and LT1014D are characterized for operation from 0°C to 70°C. The LT1014I and LT1014DI are characterized for operation from -40°C to 105°C. The LT1014M, LT1014AM and LT1014DM are characterized for operation over the full military temperature range of -55°C to 125°C.

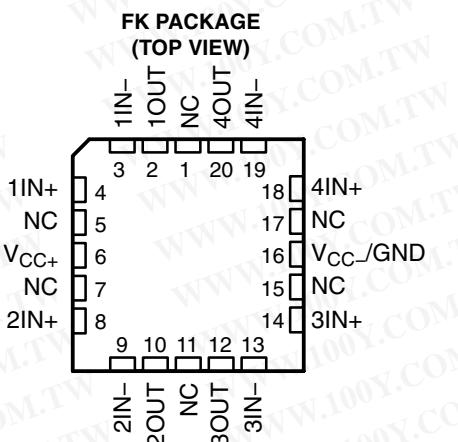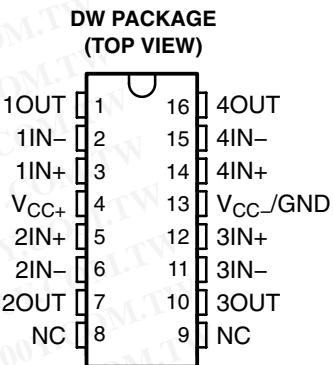

勝特力材料 886-3-5753170  
胜特力电子(上海) 86-21-34970699  
胜特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

Copyright © 2009, Texas Instruments Incorporated



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

# LT1014, LT1014A, LT1014D QUAD PRECISION OPERATIONAL AMPLIFIERS

SLOS039D – JULY 1989 – REVISED AUGUST 2009

## AVAILABLE OPTIONS<sup>†</sup>

T <sub>A</sub>	V <sub>IO</sub> max AT 25°C	PACKAGED DEVICES <sup>‡</sup>			
		SMALL OUTLINE (DW) <sup>§</sup>	CHIP CARRIER (FK)	CERAMIC DIP (J)	PLASTIC DIP (N)
0°C to 70°C	300 µV 800 µV	— LT1014DDW	— —	— —	LT1014CN LT1014DN
-40°C to 105°C	300 µV 800 µV	— LT1014DIDW	— —	— —	LT1014IN LT1014DIN
-55°C to 125°C	180 µV 300 µV 800 µV	— — LT1014DMDW	LT1014AMFK LT1014MFK —	LT1014AMJ LT1014MJ —	— LT1014MN LT1014DMN

<sup>†</sup> For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI web site at [www.ti.com](http://www.ti.com).

<sup>‡</sup> Package drawings, thermal data, and symbolization are available at [www.ti.com/packaging](http://www.ti.com/packaging).

<sup>§</sup> The DW package is available taped and reeled. Add the suffix R to the device type (e.g., LT1014DDWR).

勝特力材料 886-3-5753170  
胜特力电子(上海) 86-21-34970699  
胜特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)




POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

**LT1014, LT1014A, LT1014D**  
**QUAD PRECISION OPERATIONAL AMPLIFIERS**

SLOS039D – JULY 1989 – REVISED AUGUST 2009

schematic (each amplifier)

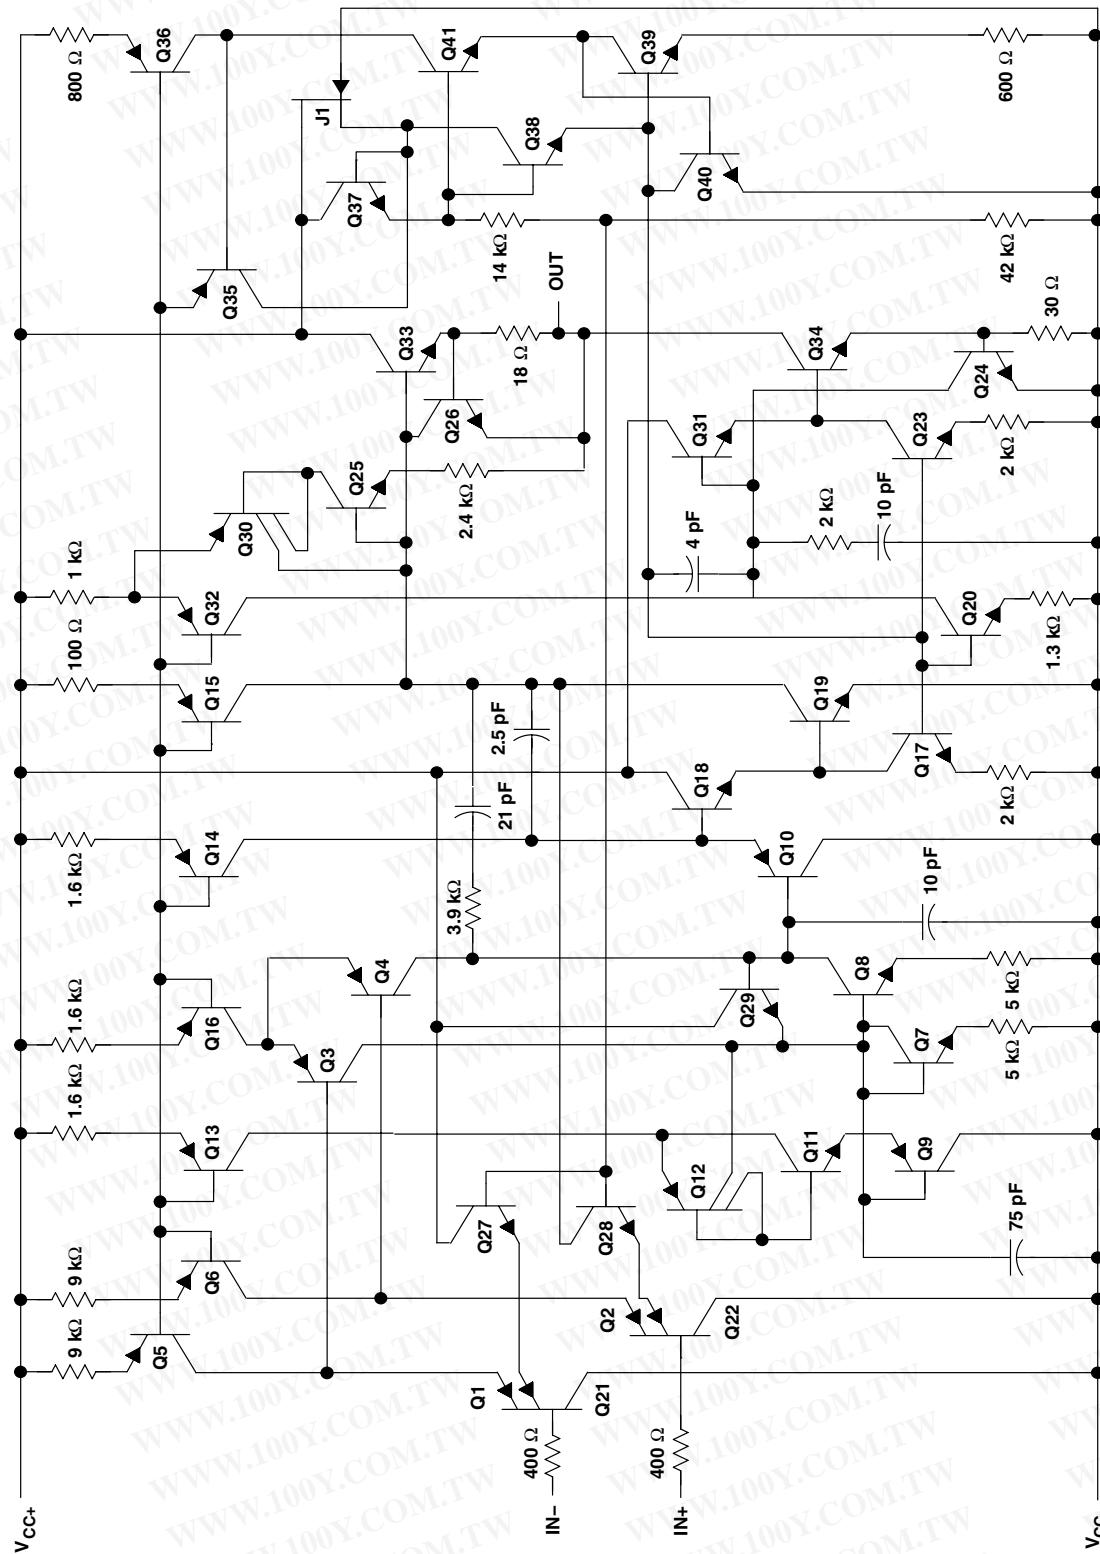

勝特力材料 886-3-5753170  
 胜特力电子(上海) 86-21-34970699  
 胜特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

 **TEXAS  
INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

# LT1014, LT1014A, LT1014D QUAD PRECISION OPERATIONAL AMPLIFIERS

SLOS039D – JULY 1989 – REVISED AUGUST 2009

## absolute maximum ratings over operating free-air temperature range (unless otherwise noted)<sup>†</sup>

Supply voltage (see Note 1): $V_{CC+}$ .....	22 V
$V_{CC-}$ .....	-22 V
Differential input voltage (see Note 2) .....	$\pm 30$ V
Input voltage range, $V_I$ (any input) (see Note 1) .....	$V_{CC-} - 5$ V to $V_{CC+}$
Duration of short-circuit current at (or below) $T_A = 25^\circ\text{C}$ (see Note 3) .....	Unlimited
Continuous total power dissipation .....	See Dissipation Rating Table
Operating free-air temperature range, $T_A$ : LT1014C, LT1014D .....	-0°C to 70°C
LT1014I, LT1014DI .....	-40°C to 105°C
LT1014M, LT1014AM, LT1014DM .....	-55°C to 125°C
Case temperature for 60 seconds: FK package .....	260°C
Storage temperature range, $T_{stg}$ .....	-65°C to 150°C

<sup>†</sup> Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

- NOTES: 1. All voltage values, except differential voltages, are with respect to the midpoint between  $V_{CC+}$  and  $V_{CC-}$ .  
2. Differential voltages are at the noninverting input with respect to the inverting input.  
3. The output may be shorted to either supply.

DISSIPATION RATING TABLE

PACKAGE	$T_A \leq 25^\circ\text{C}$ POWER RATING	DERATING FACTOR ABOVE $T_A = 25^\circ\text{C}$	$T_A = 70^\circ\text{C}$ POWER RATING	$T_A = 105^\circ\text{C}$ POWER RATING	$T_A = 125^\circ\text{C}$ POWER RATING
DW	1025 mV	8.2 mW/ $^\circ\text{C}$	656 mW	369 mW	205 mW
FK	1375 mV	11.0 mW/ $^\circ\text{C}$	880 mW	495 mW	275 mW
J	1375 mV	11.0 mW/ $^\circ\text{C}$	880 mW	495 mW	275 mW
N	1150 mV	9.2 mW/ $^\circ\text{C}$	736 mW	414 mW	230 mW

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-34970699  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

LT1014, LT1014A, LT1014D  
QUAD PRECISION OPERATIONAL AMPLIFIERS

SLOS039D – JULY 1989 – REVISED AUGUST 2009

**electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 15$  V,  $V_{IC} = 0$  (unless otherwise noted)**

PARAMETER	TEST CONDITIONS	$T_A^\dagger$	LT1014C			LT1014D			UNIT
			MIN	TYP <sup>‡</sup>	MAX	MIN	TYP <sup>‡</sup>	MAX	
$V_{IO}$ Input offset voltage	$R_S = 50 \Omega$	25°C	60	300	200	800			$\mu$ V
		Full range			550			1000	
$\alpha_{V_{IO}}$ Temperature coefficient of input offset voltage		Full range		0.4	2.5		0.7	5	$\mu$ V/°C
Long-term drift of input offset voltage		25°C		0.5			0.5		$\mu$ V/mo
$I_{IO}$ Input offset current		25°C	0.15	1.5	0.15	1.5			nA
		Full range		2.8			2.8		
$I_{IB}$ Input bias current		25°C	-12	-30	-12	-30			nA
		Full range		-38			-38		
$V_{ICR}$ Common-mode input voltage range		25°C	-15 to 13.5	-15.3 to 13.8	-15 to 13.5	-15.3 to 13.8			V
		Full range	-15 to 13		-15 to 13				
$V_{OM}$ Maximum peak output voltage swing	$R_L = 2 \text{ k}\Omega$	25°C	$\pm 12.5$	$\pm 14$	$\pm 12.5$	$\pm 14$			V
		Full range	$\pm 12$		$\pm 12$				
$A_{VD}$ Large-signal differential voltage amplification	$V_O = \pm 10$ V, $R_L = 600 \Omega$	25°C	0.5	2	0.5	2			V/ $\mu$ V
	$V_O = \pm 10$ V, $R_L = 2 \text{ k}\Omega$	25°C	1.2	8	1.2	8			
		Full range	0.7		0.7				
$CMRR$ Common-mode rejection ratio	$V_{IC} = -15$ V to 13.5 V	25°C	97	117	97	117			dB
	$V_{IC} = -15$ V to 13 V	Full range	94		94				
$k_{SVR}$ Supply-voltage rejection ratio ( $\Delta V_{CC}/\Delta V_{IO}$ )	$V_{CC\pm} = \pm 2$ V to $\pm 18$ V	25°C	100	117	100	117			dB
		Full range	97		97				
Channel separation	$V_O = \pm 10$ V, $R_L = 2 \text{ k}\Omega$	25°C	120	137	120	137			dB
$r_{id}$ Differential input resistance		25°C	70	300	70	300			MΩ
$r_{ic}$ Common-mode input resistance		25°C		4		4			GΩ
$I_{CC}$ Supply current per amplifier		25°C		0.35	0.55	0.35	0.55		mA
		Full range			0.6		0.6		

<sup>†</sup> Full range is 0°C to 70°C.

<sup>‡</sup> All typical values are at  $T_A = 25^\circ\text{C}$ .

勝特力材料 886-3-5753170  
 胜特力电子(上海) 86-21-34970699  
 胜特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

# LT1014, LT1014A, LT1014D QUAD PRECISION OPERATIONAL AMPLIFIERS

SLOS039D – JULY 1989 – REVISED AUGUST 2009

**electrical characteristics at specified free-air temperature,  $V_{CC\pm} = 5 \text{ V}$ ,  $V_{CC-} = 0$ ,  $V_O = 1.4 \text{ V}$ ,  $V_{IC} = 0$  (unless otherwise noted)**

PARAMETER	TEST CONDITIONS	$T_A^\dagger$	LT1014C			LT1014D			UNIT
			MIN	TYP	MAX	MIN	TYP	MAX	
$V_{IO}$ Input offset voltage	$R_S = 50 \Omega$	25°C	90	450	250	950			$\mu\text{V}$
		Full range		570		1200			
$I_{IO}$ Input offset current		25°C	0.2	2	0.2	2			$\text{nA}$
		Full range		6		6			
$I_{IB}$ Input bias current		25°C	-15	-50	-15	-50			$\text{nA}$
		Full range		-90		-90			
$V_{ICR}$ Common-mode input voltage range		25°C	0 to 3.5	-0.3 to 3.8	0	-0.3 to 3.5			$\text{V}$
		Full range	0 to 3		0 to 3				
$V_{OM}$ Maximum peak output voltage swing	Output low, No load	25°C	15	25	15	25			$\text{mV}$
	Output low, $R_L = 600 \Omega$ to GND	25°C	5	10	5	10			
		Full range		13		13			
	Output low, $I_{sink} = 1 \text{ mA}$	25°C	220	350	220	350			
	Output high, No load	25°C	4	4.4	4	4.4			$\text{V}$
	Output high, $R_L = 600 \Omega$ to GND	25°C	3.4	4	3.4	4			
		Full range	3.2		3.2				
$A_{VD}$ Large-signal differential voltage amplification	$V_O = 5 \text{ mV}$ to $4 \text{ V}$ , $R_L = 500 \Omega$	25°C	1		1				$\text{V}/\mu\text{V}$
$I_{CC}$ Supply current per amplifier		25°C	0.3	0.5	0.3	0.5			$\text{mA}$
		Full range		0.55		0.55			

<sup>†</sup> Full range is 0°C to 70°C.

**operating characteristics,  $V_{CC\pm} = \pm 15 \text{ V}$ ,  $V_{IC} = 0$ ,  $T_A = 25^\circ\text{C}$**

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
SR Slew rate		0.2	0.4		$\text{V}/\mu\text{s}$
$V_n$ Equivalent input noise voltage	f = 10 Hz		24		$\text{nV}/\sqrt{\text{Hz}}$
	f = 1 kHz		22		
$V_{N(PP)}$ Peak-to-peak equivalent input noise voltage	f = 0.1 Hz to 10 Hz		0.55		$\mu\text{V}$
$I_n$ Equivalent input noise current	f = 10 Hz		0.07		$\text{pA}/\sqrt{\text{Hz}}$

勝特力材料 886-3-5753170  
胜特力电子(上海) 86-21-34970699  
胜特力电子(深圳) 86-755-83298787  
Http://www.100y.com.tw



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

LT1014, LT1014A, LT1014D  
QUAD PRECISION OPERATIONAL AMPLIFIERS

SLOS039D – JULY 1989 – REVISED AUGUST 2009

**electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 15$  V,  $V_{IC} = 0$  (unless otherwise noted)**

PARAMETER	TEST CONDITIONS	$T_A^\dagger$	LT1014I			LT1014DI			UNIT
			MIN	TYP <sup>‡</sup>	MAX	MIN	TYP <sup>‡</sup>	MAX	
$V_{IO}$ Input offset voltage	$R_S = 50 \Omega$	25°C	60	300	200	800			$\mu$ V
		Full range		550		1000			
$\alpha_{V_{IO}}$ Temperature coefficient of input offset voltage		Full range		0.4	2.5		0.7	5	$\mu$ V/°C
Long-term drift of input offset voltage		25°C		0.5			0.5		$\mu$ V/mo
$I_{IO}$ Input offset current		25°C		0.15	1.5		0.15	1.5	nA
		Full range		2.8			2.8		
$I_{IB}$ Input bias current		25°C		-12	-30		-12	-30	nA
		Full range		-38			-38		
$V_{ICR}$ Common-mode input voltage range		25°C	-15 to 13.5	-15.3 to 13.8		-15 to 13.5	-15.3 to 13.8		V
		Full range	-15 to 13			-15 to 13			
$V_{OM}$ Maximum peak output voltage swing	$R_L = 2 \text{ k}\Omega$	25°C	$\pm 12.5$	$\pm 14$		$\pm 12.5$	$\pm 14$		V
		Full range	$\pm 12$			$\pm 12$			
$A_{VD}$ Large-signal differential voltage amplification	$V_O = \pm 10$ V, $R_L = 600 \Omega$	25°C	0.5	2		0.5	2		V/ $\mu$ V
	$V_O = \pm 10$ V, $R_L = 2 \text{ k}\Omega$	25°C	1.2	8		1.2	8		
		Full range	0.7			0.7			
CMRR Common-mode rejection ratio	$V_{IC} = -15$ V to 13.5 V	25°C	97	117		97	117		dB
		Full range	94			94			
$k_{SVR}$ Supply-voltage rejection ratio ( $\Delta V_{CC}/\Delta V_{IO}$ )	$V_{CC\pm} = \pm 2$ V to $\pm 18$ V	25°C	100	117		100	117		dB
		Full range	97			97			
Channel separation	$V_O = \pm 10$ V, $R_L = 2 \text{ k}\Omega$	25°C	120	137		120	137		dB
$r_{id}$ Differential input resistance		25°C	70	300		70	300		MΩ
$r_{ic}$ Common-mode input resistance		25°C		4			4		GΩ
$I_{CC}$ Supply current per amplifier		25°C		0.35	0.55		0.35	0.55	mA
		Full range		0.6			0.6		

<sup>†</sup> Full range is -40°C to 105°C.

<sup>‡</sup> All typical values are at  $T_A = 25^\circ\text{C}$ .

勝特力材料 886-3-5753170  
 胜特力电子(上海) 86-21-34970699  
 胜特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

# LT1014, LT1014A, LT1014D QUAD PRECISION OPERATIONAL AMPLIFIERS

SLOS039D – JULY 1989 – REVISED AUGUST 2009

**electrical characteristics at specified free-air temperature,  $V_{CC+} = 5 \text{ V}$ ,  $V_{CC-} = 0$ ,  $V_O = 1.4 \text{ V}$ ,  $V_{IC} = 0$  (unless otherwise noted)**

PARAMETER	TEST CONDITIONS	$T_A^\dagger$	LT1014I			LT1014DI			UNIT
			MIN	TYP	MAX	MIN	TYP	MAX	
$V_{IO}$ Input offset voltage	$R_S = 50 \Omega$	25°C	90	450		250	950		$\mu\text{V}$
		Full range		570			1200		
$I_{IO}$ Input offset current		25°C	0.2	2		0.2	2		$\text{nA}$
		Full range		6			6		
$I_{IB}$ Input bias current		25°C	-15	-50		-15	-50		$\text{nA}$
		Full range		-90			-90		
$V_{ICR}$ Common-mode input voltage range		25°C	0 to 3.5	-0.3 to 3.8		0 to 3.5	-0.3 to 3.8		$\text{V}$
		Full range	0 to 3			0 to 3			
$V_{OM}$ Maximum peak output voltage swing	Output low, No load	25°C	15	25		15	25		$\text{mV}$
	Output low, $R_L = 600 \Omega$ to GND	25°C	5	10		5	10		
		Full range		13			13		
	Output low, $I_{sink} = 1 \text{ mA}$	25°C	220	350		220	350		
	Output high, No load	25°C	4	4.4		4	4.4		$\text{V}$
		25°C	3.4	4		3.4	4		
	Output high, $R_L = 600 \Omega$ to GND	Full range	3.2			3.2			
$A_{VD}$ Large-signal differential voltage amplification	$V_O = 5 \text{ mV}$ to $4 \text{ V}$ , $R_L = 500 \Omega$	25°C	1			1			$\text{V}/\mu\text{V}$
$I_{CC}$ Supply current per amplifier		25°C	0.3	0.5		0.3	0.5		$\text{mA}$
		Full range		0.55			0.55		

<sup>†</sup> Full range is -40°C to 105°C.

**operating characteristics,  $V_{CC+} = \pm 15 \text{ V}$ ,  $V_{IC} = 0$ ,  $T_A = 25^\circ\text{C}$**

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
SR Slew rate		0.2	0.4		$\text{V}/\mu\text{s}$
$V_n$ Equivalent input noise voltage	f = 10 Hz		24		$\text{nV}/\sqrt{\text{Hz}}$
	f = 1 kHz		22		
$V_{N(PP)}$ Peak-to-peak equivalent input noise voltage	f = 0.1 Hz to 10 Hz		0.55		$\mu\text{V}$
$I_n$ Equivalent input noise current	f = 10 Hz		0.07		$\text{pA}/\sqrt{\text{Hz}}$

勝特力材料 886-3-5753170  
胜特力电子(上海) 86-21-34970699  
胜特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

LT1014, LT1014A, LT1014D  
QUAD PRECISION OPERATIONAL AMPLIFIERS

SLOS039D – JULY 1989 – REVISED AUGUST 2009

**electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 15$  V,  $V_{IC} = 0$  (unless otherwise noted)**

PARAMETER	TEST CONDITIONS	$T_A^\dagger$	LT1014M			LT1014AM			LT1014DM			UNIT
			MIN	TYP <sup>‡</sup>	MAX	MIN	TYP <sup>‡</sup>	MAX	MIN	TYP <sup>‡</sup>	MAX	
$V_{IO}$ Input offset voltage	$R_S = 50$ Ω	25°C	60	300	60	180	200	800	μV	μV	1000	μV
		Full range		550		350						
$\alpha_{V_{IO}}$ Temperature coefficient of input offset voltage		Full range		0.5	2.5	0.5	2	0.5	2.5	0.5	2.5	μV/°C
Long-term drift of input offset voltage		25°C		0.5		0.5		0.5		0.5		μV/mo
$I_{IO}$ Input offset current		25°C	0.15	1.5	0.15	0.8	0.15	1.5	nA	nA	5	nA
		Full range		5		2.8						
$I_{IB}$ Input bias current		25°C	-12	-30	-12	-20	-12	-30	nA	nA	-45	nA
		Full range		-45		-30						
$V_{ICR}$ Common-mode input voltage range		25°C	-15 to 13.5	-15.3 to 13.8	-15 to 13.5	-15.3 to 13.8	-15 to 13.5	-15.3 to 13.8	V	V	13.5 to 13.8	V
		Full range	-14.9 to 13		-14.9 to 13		-14.9 to 13					
$V_{OM}$ Maximum peak output voltage swing	$R_L = 2$ kΩ	25°C	±12.5	±14	±13	±14	±12.5	±14	V	V	±11.5	V
		Full range	±11.5		±12		±12.5	±14				
$A_{VD}$ Large-signal differential voltage amplification	$V_O = \pm 10$ V, $R_L = 600$ Ω	25°C	0.5	2	0.8	2.2	0.5	2	V/μV	V/μV	0.25	V/μV
	$V_O = \pm 10$ V, $R_L = 2$ kΩ	25°C	1.2	8	1.5	8	1.2	8				
		Full range	0.25		0.4		0.25					
CMRR Common-mode rejection ratio	$V_{IC} = -15$ V to 13.5 V	25°C	97	117	100	117	97	117	dB	dB	94	dB
	$V_{IC} = -14.9$ V to 13 V	Full range	94		96		94					
$k_{SVR}$ Supply-voltage rejection ratio ( $\Delta V_{CC}/\Delta V_{IO}$ )	$V_{CC\pm} = \pm 2$ V to ±18 V	25°C	100	117	103	117	100	117	dB	dB	97	dB
		Full range	97		100		97					
Channel separation	$V_O = \pm 10$ V, $R_L = 2$ kΩ	25°C	120	137	123	137	120	137				dB
$r_{id}$ Differential input resistance		25°C	70	300	100	300	70	300				MΩ
$r_{ic}$ Common-mode input resistance		25°C		4		4		4				GΩ
$I_{CC}$ Supply current per amplifier		25°C	0.35	0.55	0.35	0.50	0.35	0.55	mA	mA	0.7	mA
		Full range		0.7		0.6		0.7				

<sup>†</sup> Full range is -55°C to 125°C.

<sup>‡</sup> All typical values are at  $T_A = 25$  °C.

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

# LT1014, LT1014A, LT1014D QUAD PRECISION OPERATIONAL AMPLIFIERS

SLOS039D – JULY 1989 – REVISED AUGUST 2009

**electrical characteristics at specified free-air temperature,  $V_{CC+} = 5 \text{ V}$ ,  $V_{CC-} = 0$ ,  $V_O = 1.4 \text{ V}$ ,  $V_{IC} = 0$  (unless otherwise noted)**

PARAMETER	TEST CONDITIONS	$T_A^\dagger$	LT1014M			LT1014AM			LT1014DM			UNIT
			MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	
$V_{IO}$ Input offset voltage	$R_S = 50\Omega$	25°C	90	450	90	280	250	950	$\mu\text{V}$			
		Full range	400	1500	400	960	800	2000				
	$R_S = 50\Omega$ , $V_{IC} = 0.1 \text{ V}$	125°C	200	750	200	480	560	1200				
$I_{IO}$ Input offset current		25°C	0.2	2	0.2	1.3	0.2	2	$\text{nA}$			
		Full range		10		7		10				
$I_{IB}$ Input bias current		25°C	-15	-50	-15	-35	-15	-50				
		Full range		-120		-90		-120				
$V_{ICR}$ Common-mode input voltage range		25°C	0 to 3.5	-0.3 to 3.8	0 to 3.5	-0.3 to 3.8	0 to 3.5	-0.3 to 3.8	$\text{V}$			
		Full range	0.1 to 3		0.1 to 3		0.1 to 3					
$V_{OM}$ Maximum peak output voltage swing	Output low, No load	25°C	15	25	15	25	15	25	$\text{mV}$			
	$R_L = 600\Omega$ to GND	25°C	5	10	5	10	5	10				
		Full range		18		15		18				
	Output low, $I_{sink} = 1 \text{ mA}$	25°C	220	350	220	350	220	350				
	Output high, No load	25°C	4	4.4	4	4.4	4	4.4	$\text{V}$			
	Output high, $R_L = 600\Omega$ to GND	25°C	3.4	4	3.4	4	3.4	4				
$A_{VD}$ Large-signal differential voltage amplification	$V_O = 5 \text{ mV}$ to $4 \text{ V}$ , $R_L = 500\Omega$	25°C	1	1	1	1	1	1	$\text{V}/\mu\text{V}$			
$I_{CC}$ Supply current per amplifier		25°C	0.3	0.5	0.3	0.45	0.3	0.5	$\text{mA}$			
		Full range		0.65		0.55		0.65				

<sup>†</sup> Full range is -55°C to 125°C.

**operating characteristics,  $V_{CC\pm} = \pm 15 \text{ V}$ ,  $V_{IC} = 0$ ,  $T_A = 25^\circ\text{C}$**

PARAMETER			TEST CONDITIONS	MIN	TYP	MAX	UNIT
SR	Slew rate			0.2	0.4		$\text{V}/\mu\text{s}$
$V_n$ Equivalent input noise voltage			$f = 10 \text{ Hz}$	24			$\text{nV}/\sqrt{\text{Hz}}$
			$f = 1 \text{ kHz}$	22			
$V_{N(PP)}$ Peak-to-peak equivalent input noise voltage			$f = 0.1 \text{ Hz}$ to $10 \text{ Hz}$	0.55			$\mu\text{V}$
$I_n$ Equivalent input noise current			$f = 10 \text{ Hz}$	0.07			$\text{pA}/\sqrt{\text{Hz}}$

勝特力材料 886-3-5753170  
胜特力电子(上海) 86-21-34970699  
胜特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

# LT1014, LT1014A, LT1014D QUAD PRECISION OPERATIONAL AMPLIFIERS

SLOS039D – JULY 1989 – REVISED AUGUST 2009

## TYPICAL CHARACTERISTICS

Table of Graphs

		FIGURE
$V_{IO}$	Input offset voltage vs Balanced source resistance	1
$V_{IO}$	Input offset voltage vs Free-air temperature	2
$\Delta V_{IO}$	Warm-Up Change in input offset voltage vs Elapsed time	3
$I_{IO}$	Input offset current vs Free-air temperature	4
$I_{IB}$	Input bias current vs Free-air temperature	5
$V_{IC}$	Common-mode input voltage vs Input bias current	6
$A_{VD}$	Differential voltage amplification	7, 8
	vs Load resistance	9, 10
Channel separation vs Frequency		11
Output saturation voltage vs Free-air temperature		12
CMRR	Common-mode rejection ratio vs Frequency	13
$k_{SVR}$	Supply-voltage rejection ratio vs Frequency	14
$I_{CC}$	Supply current vs Free-air temperature	15
$I_{OS}$	Short-circuit output current vs Elapsed time	16
$V_n$	Equivalent input noise voltage vs Frequency	17
$I_n$	Equivalent input noise current vs Frequency	17
$V_{N(PP)}$	Peak-to-peak input noise voltage vs Time	18
Pulse response (small signal) vs Time		19, 21
Pulse response (large signal) vs Time		20, 22, 23
Phase shift vs Frequency		9

勝特力材料 886-3-5753170  
胜特力电子(上海) 86-21-34970699  
胜特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

# LT1014, LT1014A, LT1014D QUAD PRECISION OPERATIONAL AMPLIFIERS

SLOS039D – JULY 1989 – REVISED AUGUST 2009

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-34970699  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## TYPICAL CHARACTERISTICS<sup>†</sup>

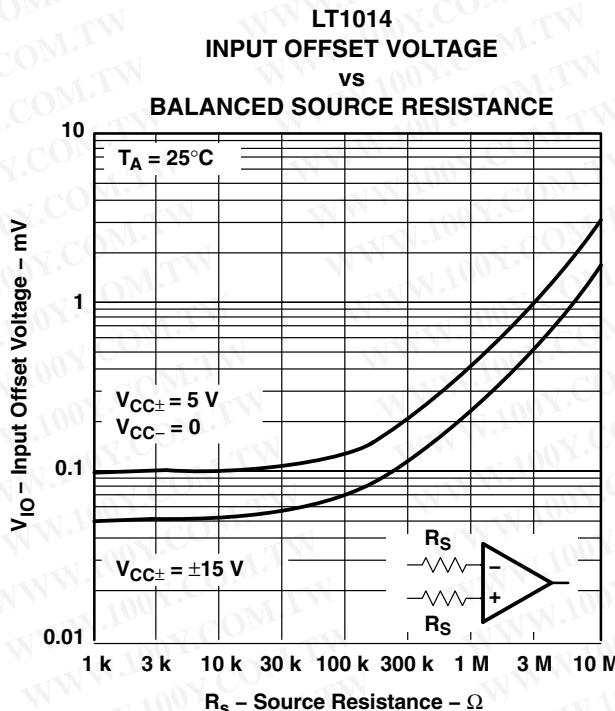


Figure 1

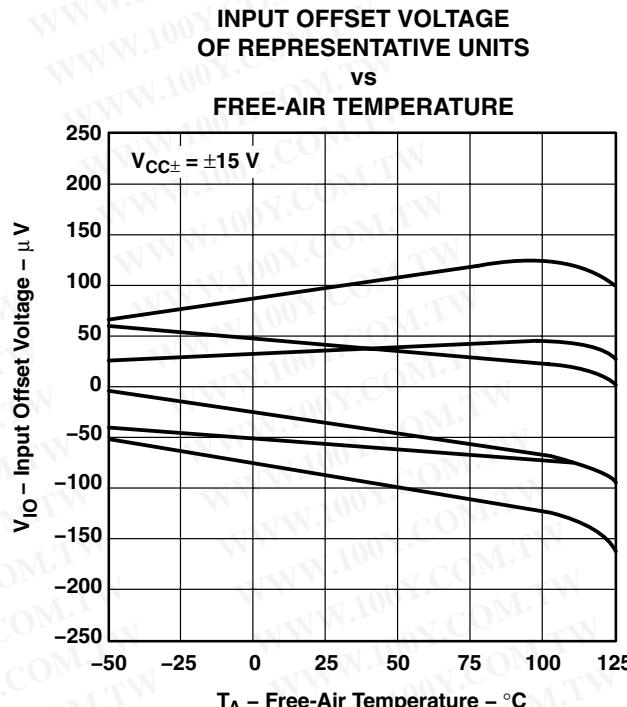


Figure 2

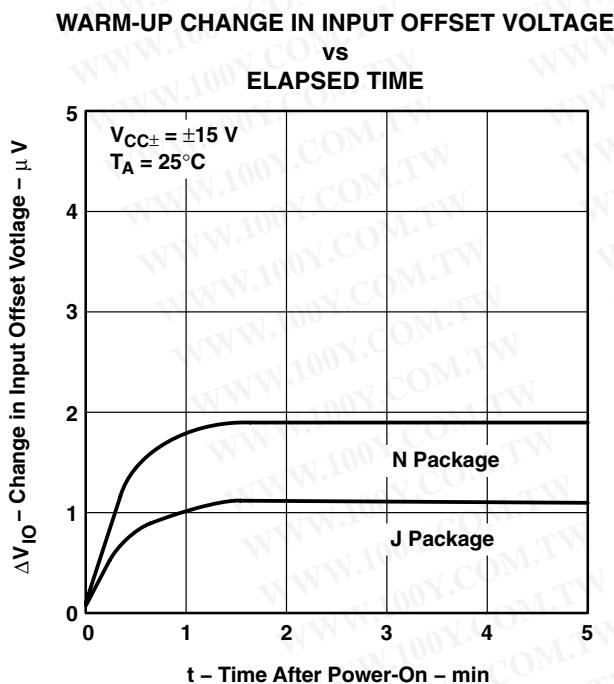


Figure 3

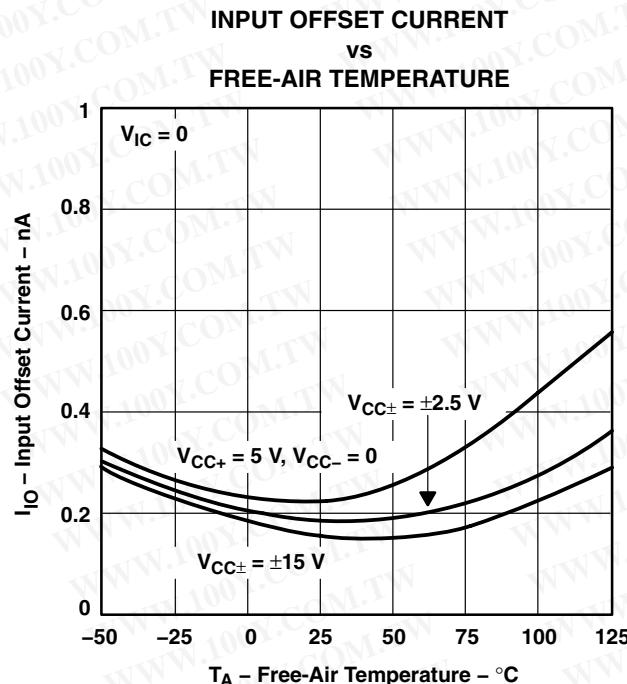


Figure 4

<sup>†</sup> Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

TYPICAL CHARACTERISTICS<sup>†</sup>

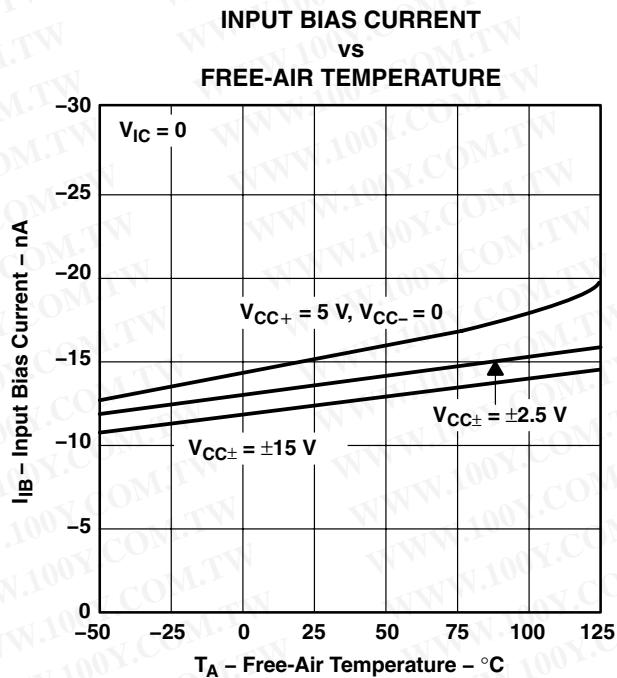


Figure 5

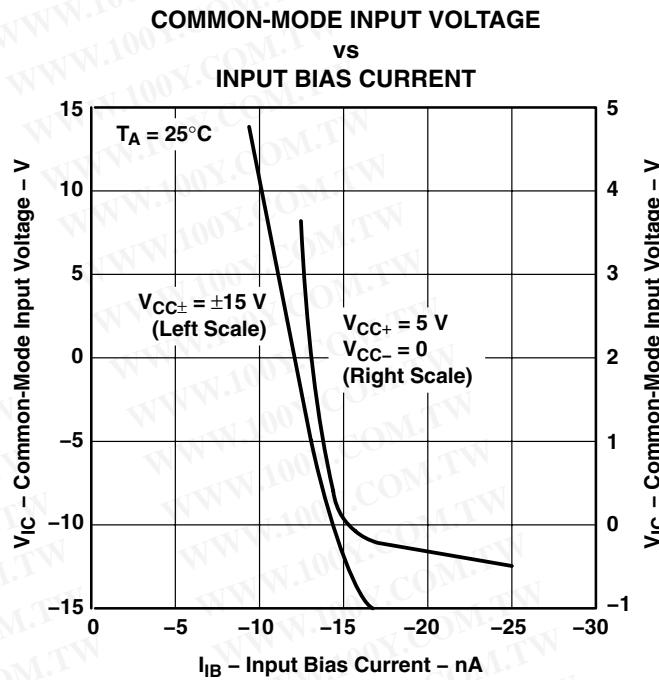


Figure 6

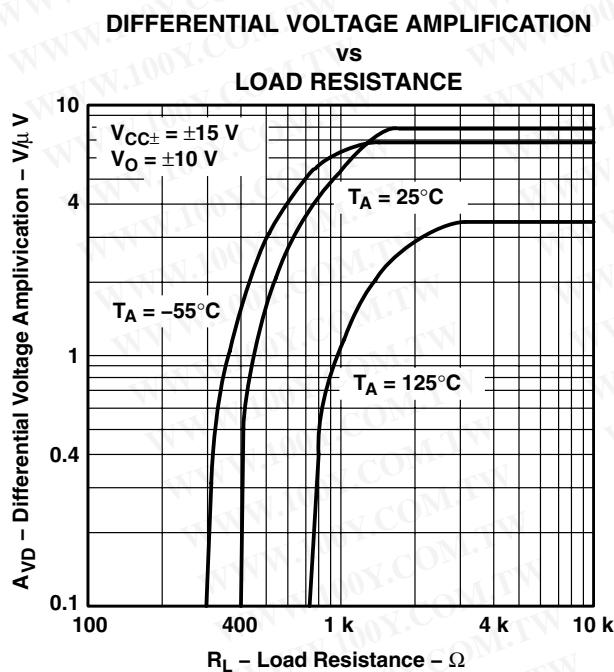


Figure 7

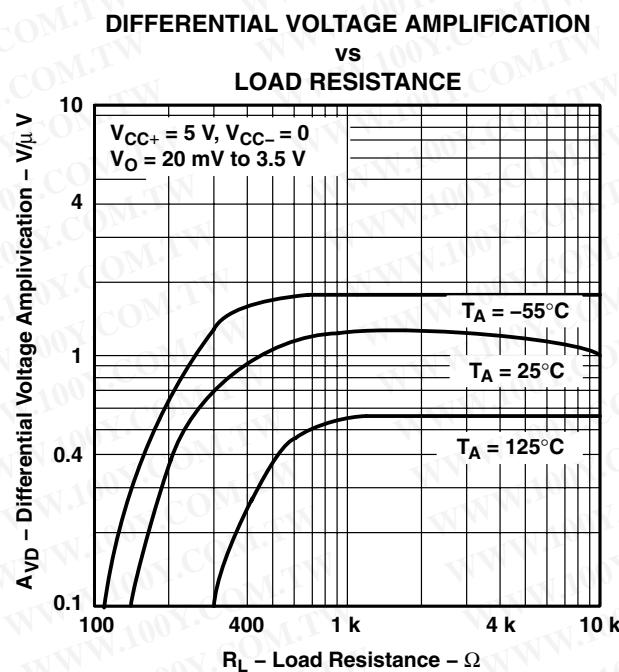


Figure 8

<sup>†</sup> Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

# LT1014, LT1014A, LT1014D QUAD PRECISION OPERATIONAL AMPLIFIERS

SLOS039D – JULY 1989 – REVISED AUGUST 2009

勝特力材料 886-3-5753170  
胜特力电子(上海) 86-21-34970699  
胜特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## TYPICAL CHARACTERISTICS<sup>†</sup>

### DIFFERENTIAL VOLTAGE AMPLIFICATION AND PHASE SHIFT

VS  
FREQUENCY

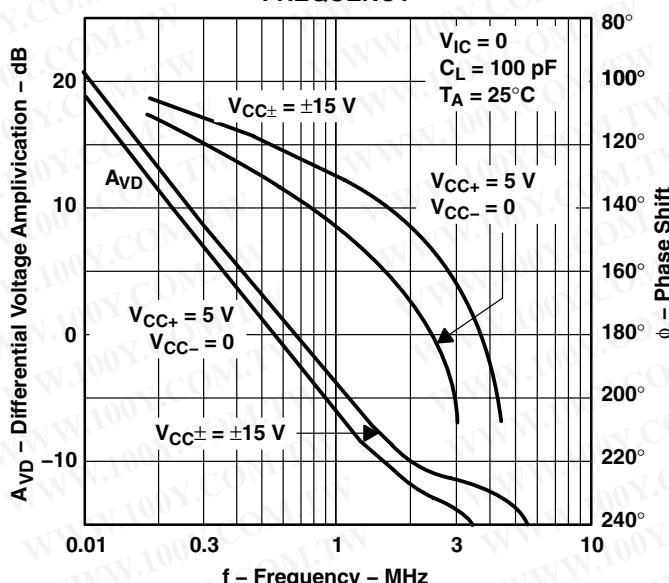


Figure 9

### DIFFERENTIAL VOLTAGE AMPLIFICATION VS FREQUENCY

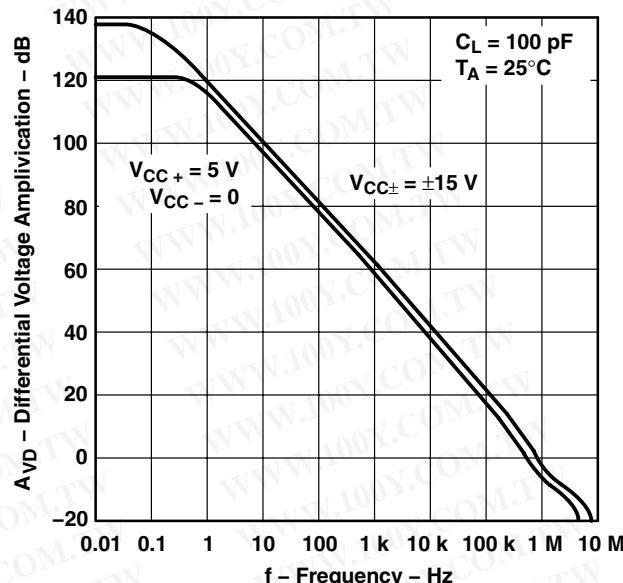


Figure 10

### CHANNEL SEPARATION VS FREQUENCY

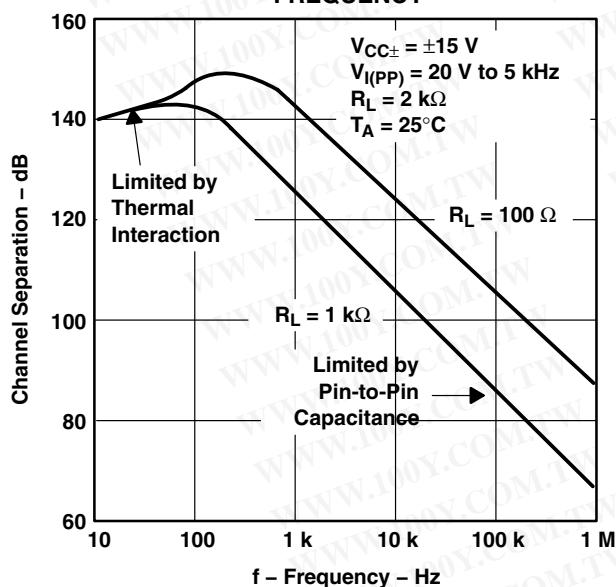


Figure 11

### OUTPUT SATURATION VOLTAGE VS FREE-AIR TEMPERATURE

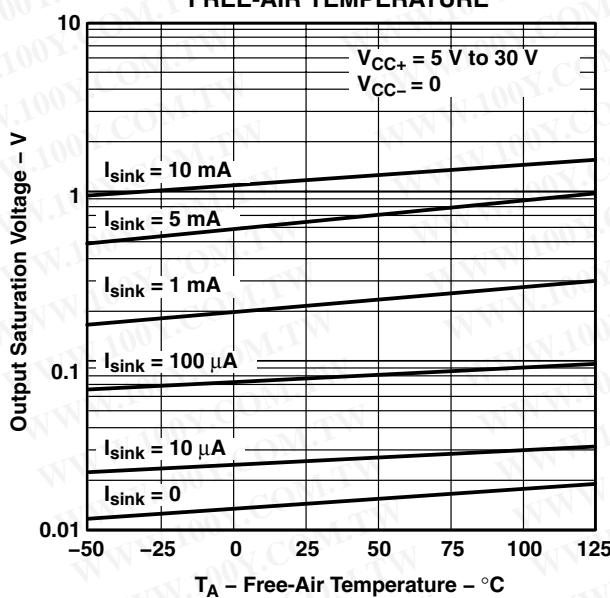


Figure 12

<sup>†</sup> Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

TYPICAL CHARACTERISTICS<sup>†</sup>

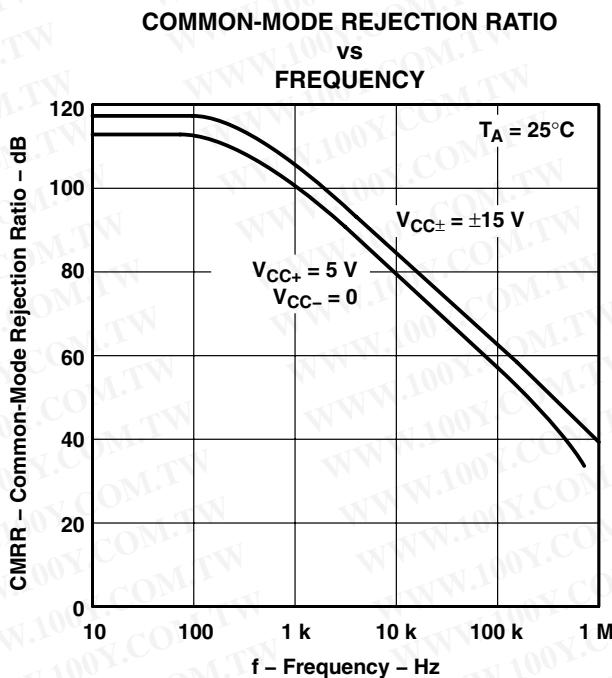


Figure 13

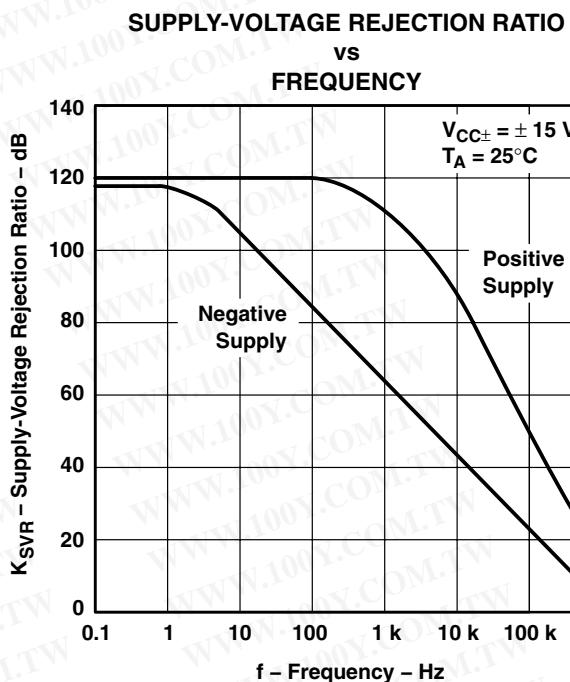


Figure 14

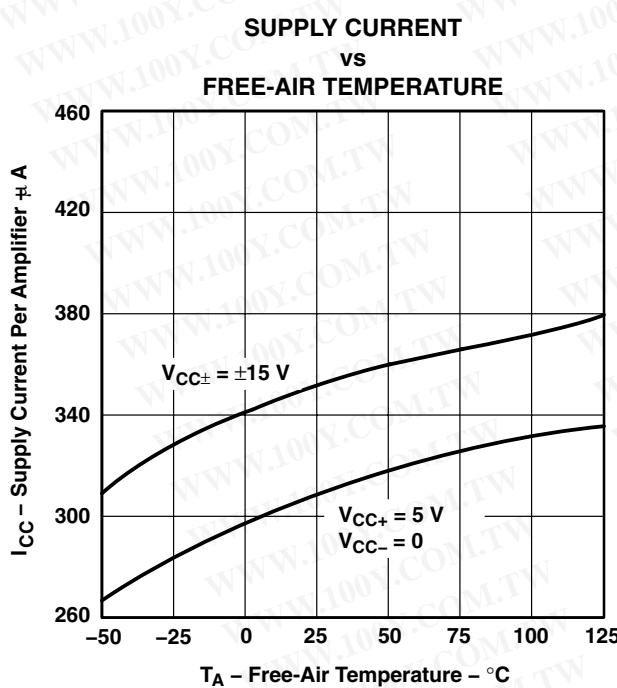


Figure 15

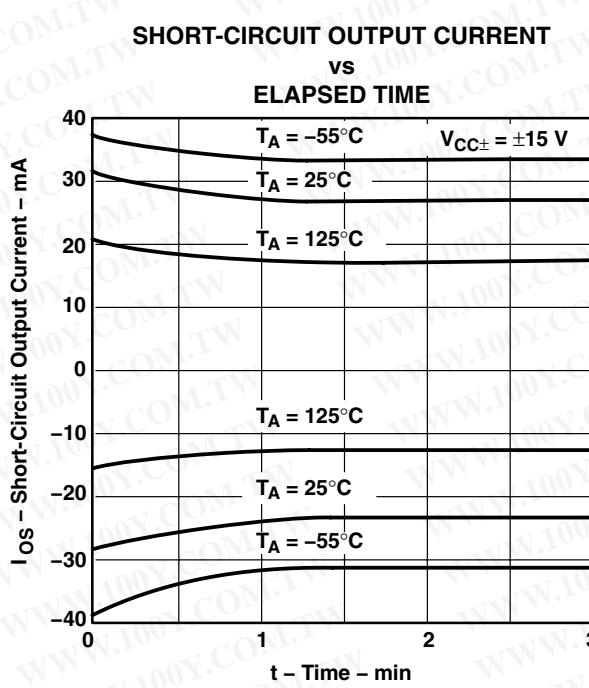


Figure 16

<sup>†</sup> Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

# LT1014, LT1014A, LT1014D QUAD PRECISION OPERATIONAL AMPLIFIERS

SLOS039D – JULY 1989 – REVISED AUGUST 2009

勝特力材料 886-3-5753170  
胜特力电子(上海) 86-21-34970699  
胜特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## TYPICAL CHARACTERISTICS

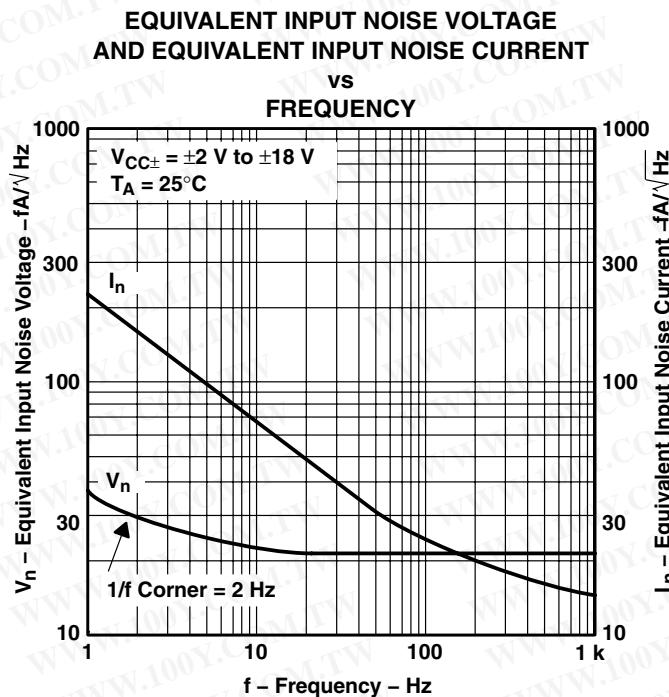


Figure 17

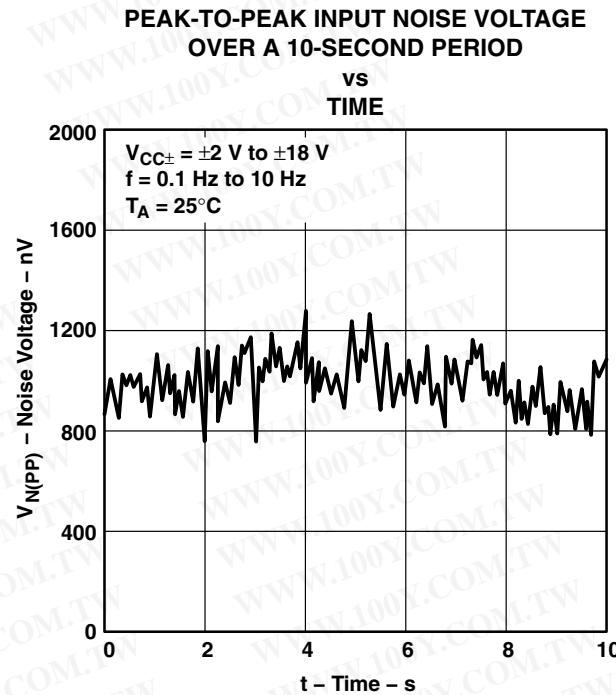


Figure 18

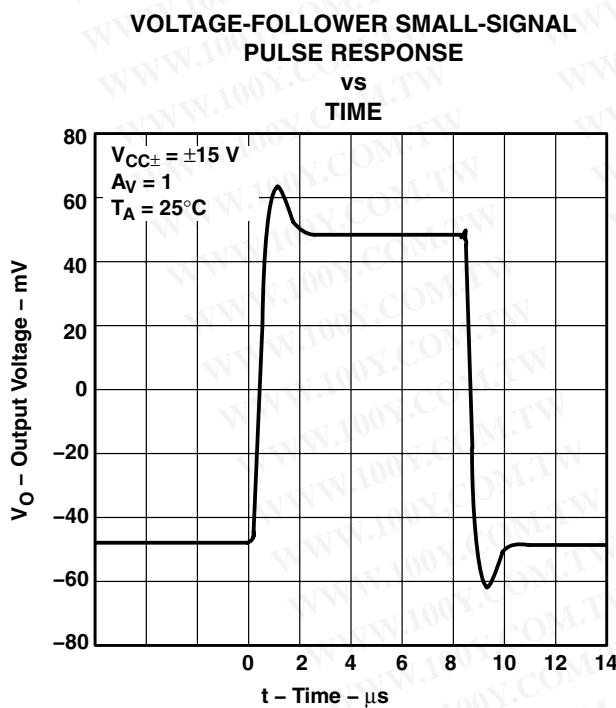


Figure 19

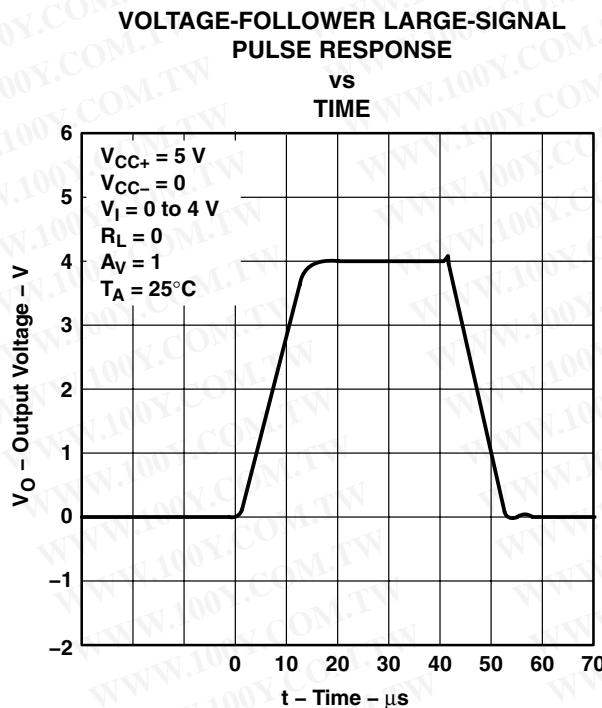


Figure 20

### TYPICAL CHARACTERISTICS

**VOLTAGE-FOLLOWER SMALL-SIGNAL  
PULSE RESPONSE**

vs  
TIME

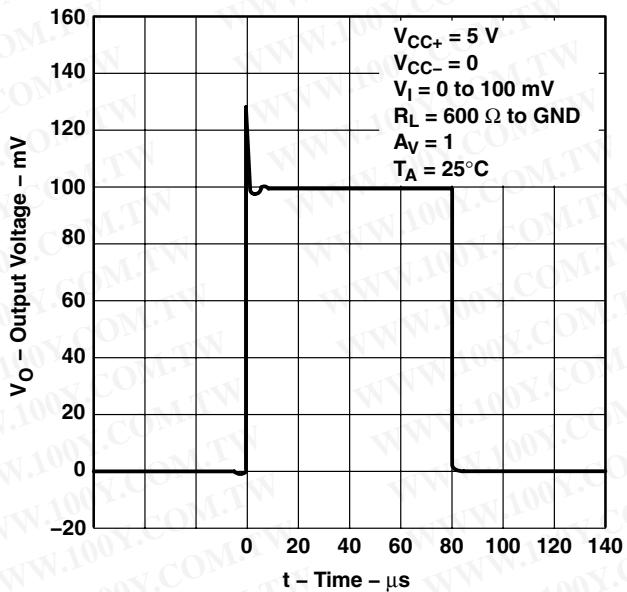


Figure 21

**VOLTAGE-FOLLOWER LARGE-SIGNAL  
PULSE RESPONSE**

vs  
TIME

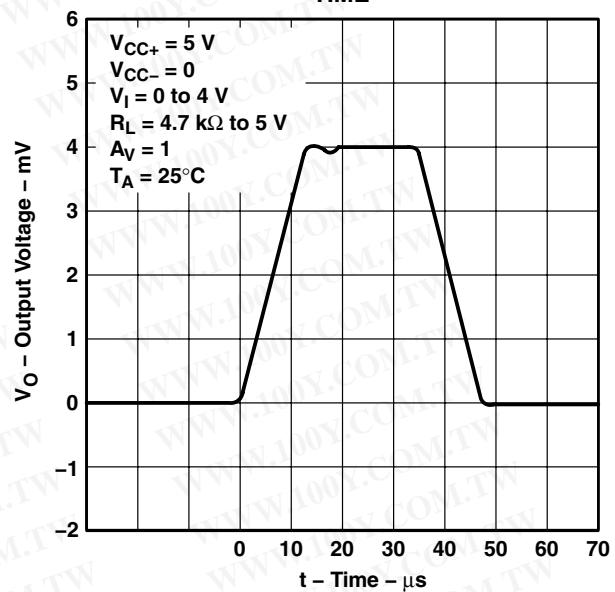


Figure 22

**VOLTAGE-FOLLOWER LARGE-SIGNAL  
PULSE RESPONSE**

vs  
TIME

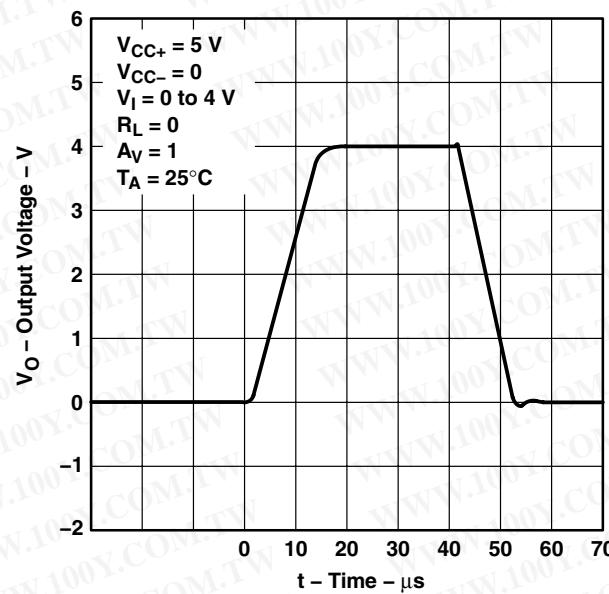


Figure 23

勝特力材料 886-3-5753170  
胜特力电子(上海) 86-21-34970699  
胜特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)

# LT1014, LT1014A, LT1014D QUAD PRECISION OPERATIONAL AMPLIFIERS

SLOS039D – JULY 1989 – REVISED AUGUST 2009

勝特力材料 886-3-5753170  
胜特力电子(上海) 86-21-34970699  
胜特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## APPLICATION INFORMATION

### single-supply operation

The LT1014 is fully specified for single-supply operation ( $V_{CC-} = 0$ ). The common-mode input voltage range includes ground, and the output swings within a few millivolts of ground.

Furthermore, the LT1014 has specific circuitry that addresses the difficulties of single-supply operation, both at the input and at the output. At the input, the driving signal can fall below 0 V, either inadvertently or on a transient basis. If the input is more than a few hundred millivolts below ground, the LT1014 is designed to deal with the following two problems that can occur:

1. On many other operational amplifiers, when the input is more than a diode drop below ground, unlimited current flows from the substrate ( $V_{CC-}$  terminal) to the input, which can destroy the unit. On the LT1014, the  $400\text{-}\Omega$  resistors in series with the input (see schematic) protect the device even when the input is 5 V below ground.
2. When the input is more than 400 mV below ground (at  $T_A = 25^\circ\text{C}$ ), the input stage of similar type operational amplifiers saturates, and phase reversal occurs at the output. This can cause lockup in servo systems. Because of unique phase-reversal protection circuitry (Q21, Q22, Q27, and Q28), the LT1014 outputs do not reverse, even when the inputs are at  $-1.5\text{ V}$  (see Figure 24).

However, this phase-reversal protection circuitry does not function when the other operational amplifier on the LT1014 is driven hard into negative saturation at the output. Phase-reversal protection does not work on an amplifier:

- When 4's output is in negative saturation (the outputs of 2 and 3 have no effect)
- When 3's output is in negative saturation (the outputs of 1 and 4 have no effect)
- When 2's output is in negative saturation (the outputs of 1 and 4 have no effect)
- When 1's output is in negative saturation (the outputs of 2 and 3 have no effect)

At the output, other single-supply designs either cannot swing to within 600 mV of ground or cannot sink more than a few microproampères while swinging to ground. The all-npn output stage of the LT1014 maintains its low output resistance and high gain characteristics until the output is saturated. In dual-supply operations, the output stage is free of crossover distortion.

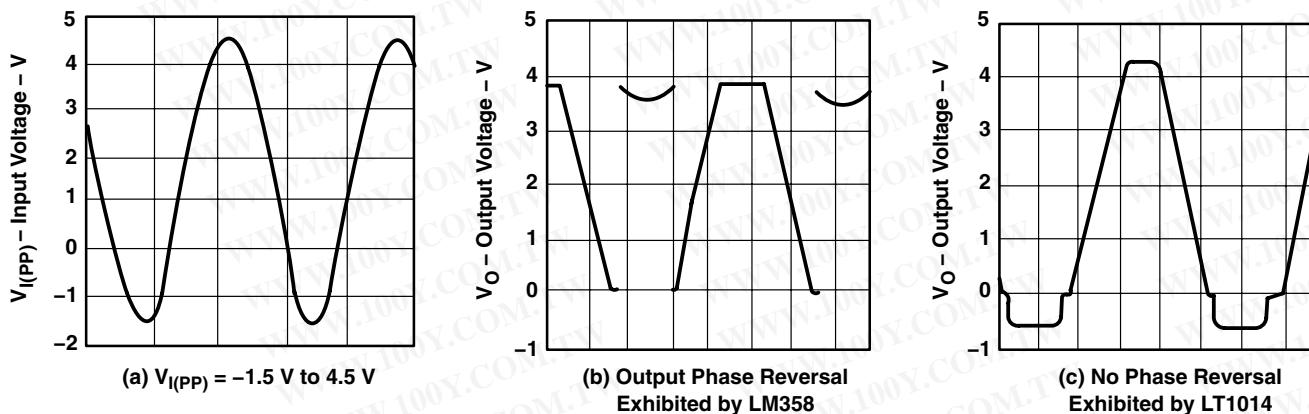


Figure 24. Voltage-Follower Response  
With Input Exceeding the Negative Common-Mode Input Voltage Range




POST OFFICE BOX 655303 • DALLAS, TEXAS 75265


## APPLICATION INFORMATION

### comparator applications

The single-supply operation of the LT1014 can be used as a precision comparator with TTL-compatible output. In systems using both operational amplifiers and comparators, the LT1014 can perform multiple duties (see Figures 25 and 26).

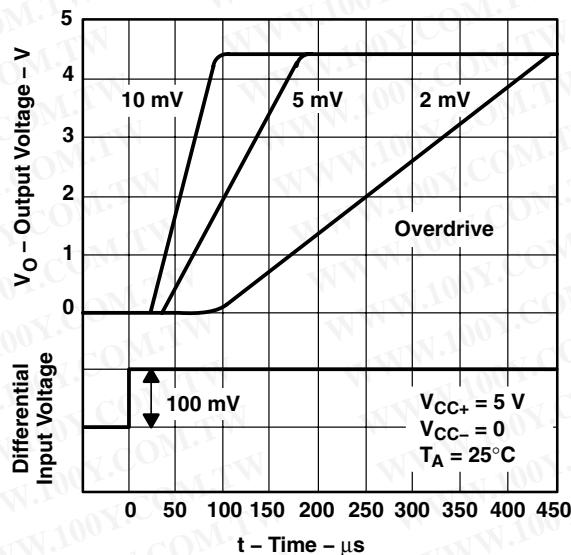

**Figure 25.** Low-to-High-Level Output Response for Various Input Overdrives

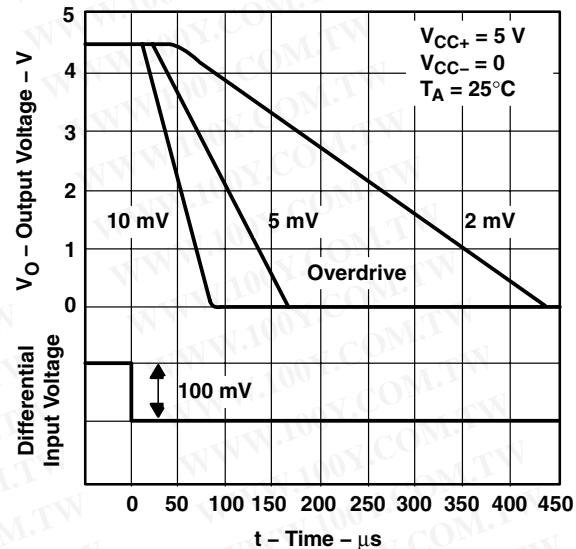

**Figure 26.** High-to-Low-Level Output Response for Various Input Overdrives

### low-supply operation

The minimum supply voltage for proper operation of the LT1014 is 3.4 V (three Ni-Cad batteries). Typical supply current at this voltage is 290  $\mu$ A; therefore, power dissipation is only 1 mW per amplifier.

### offset voltage and noise testing

Figure 30 shows the test circuit for measuring input offset voltage and its temperature coefficient. This circuit with supply voltages increased to  $\pm 20$  V is also used as the burn-in configuration.

The peak-to-peak equivalent input noise voltage of the LT1014 is measured using the test circuit shown in Figure 27. The frequency response of the noise tester indicates that the 0.1-Hz corner is defined by only one zero. The test time to measure 0.1-Hz to 10-Hz noise should not exceed 10 seconds, as this time limit acts as an additional zero to eliminate noise contribution from the frequency band below 0.1 Hz.

An input noise-voltage test is recommended when measuring the noise of a large number of units. A 10-Hz input noise-voltage measurement correlates well with a 0.1-Hz peak-to-peak noise reading because both results are determined by the white noise and the location of the 1/f corner frequency.


Noise current is measured by the circuit and formula shown in Figure 28. The noise of the source resistors is subtracted.

# LT1014, LT1014A, LT1014D QUAD PRECISION OPERATIONAL AMPLIFIERS

SLOS039D – JULY 1989 – REVISED AUGUST 2009


勝特力材料 886-3-5753170  
胜特力电子(上海) 86-21-34970699  
胜特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## APPLICATION INFORMATION

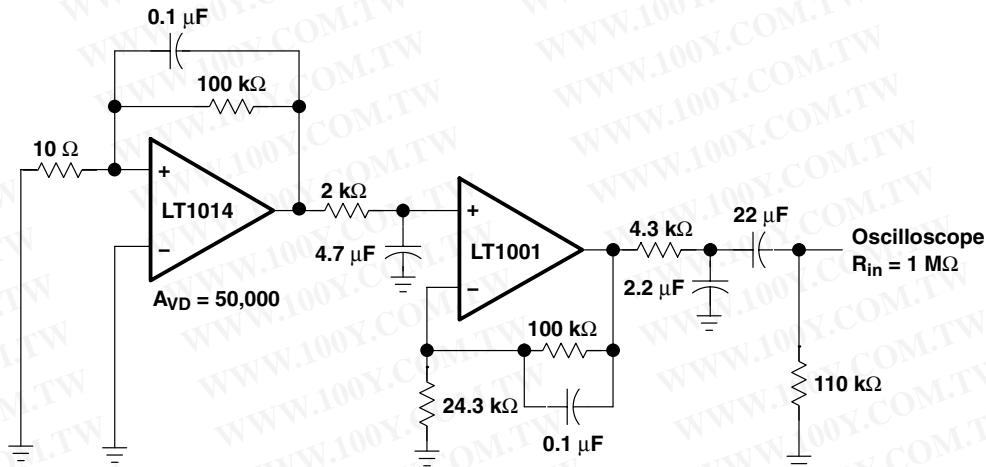


NOTE A: All capacitor values are for nonpolarized capacitors only.

Figure 27. 0.1-Hz to 10-Hz Peak-to-Peak Noise Test Circuit

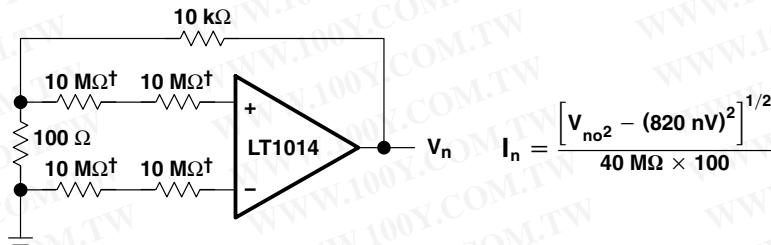

† Metal-film resistor


Figure 28. Noise-Current Test Circuit and Formula

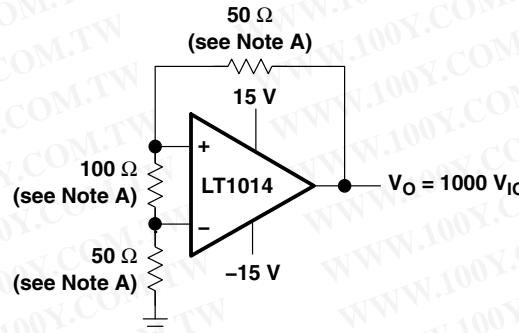

NOTE A: Resistors must have low thermoelectric potential.

Figure 29. Test Circuit for  $V_{IO}$  and  $\alpha V_{IO}$

### APPLICATION INFORMATION

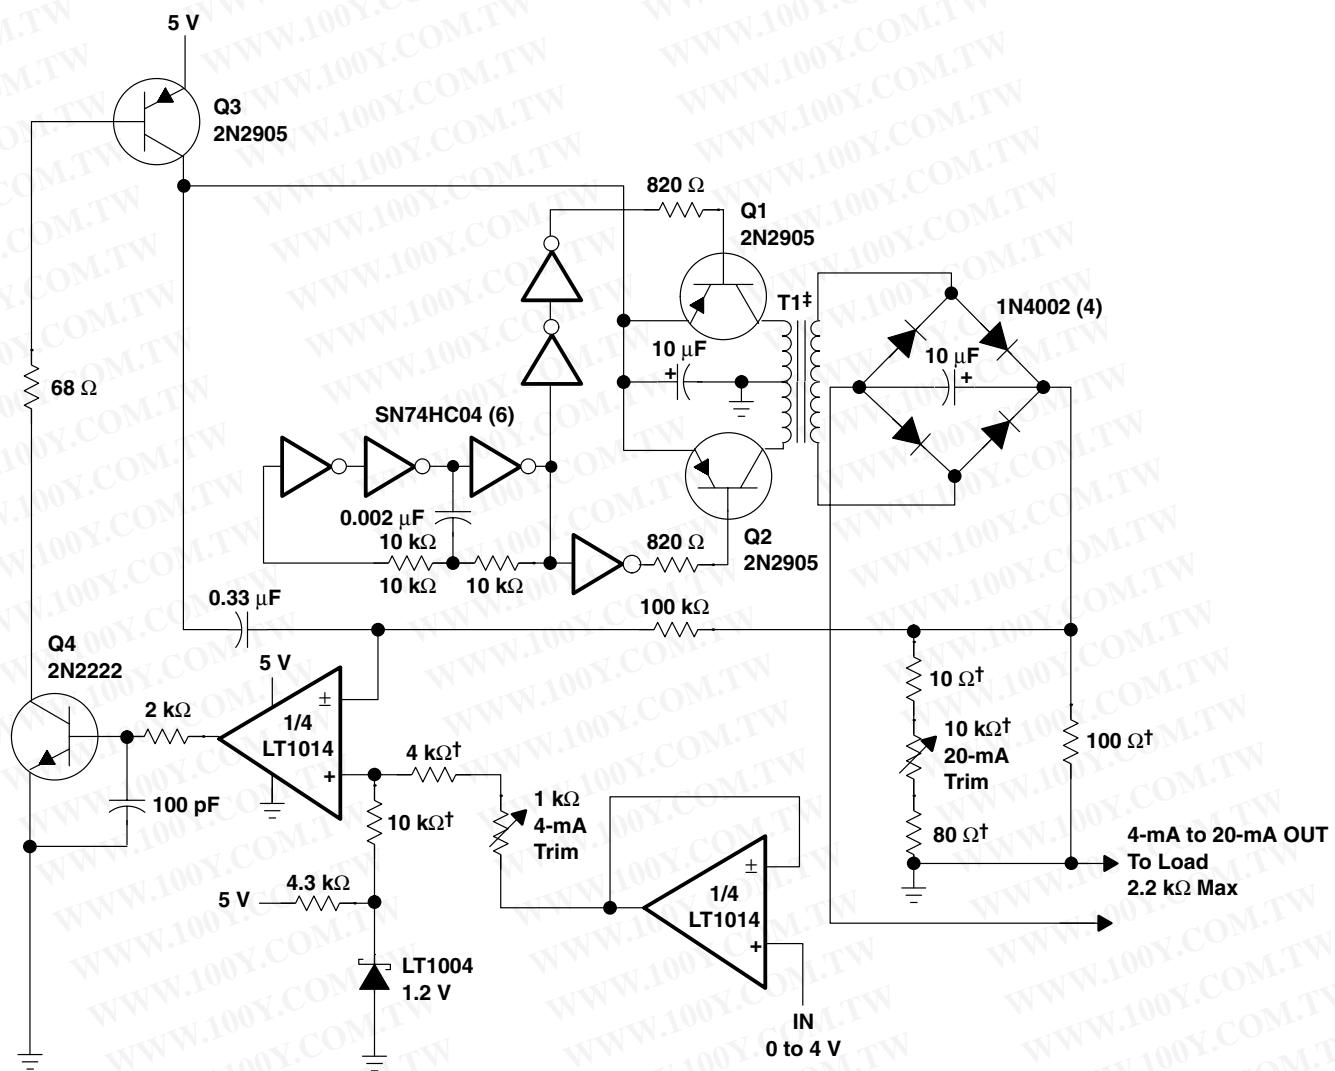

† 1% film resistor. Match 10-kΩ resistors 0.05%.

‡ T1 = PICO-31080


**Figure 30. 5-V Powered, 4-mA to 20-mA Current-Loop Transmitter With 12-Bit Accuracy**

腾特力材料 886-3-5753170  
胜特力电子(上海) 86-21-34970699  
胜特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)


# LT1014, LT1014A, LT1014D QUAD PRECISION OPERATIONAL AMPLIFIERS

SLOS039D – JULY 1989 – REVISED AUGUST 2009

## APPLICATION INFORMATION

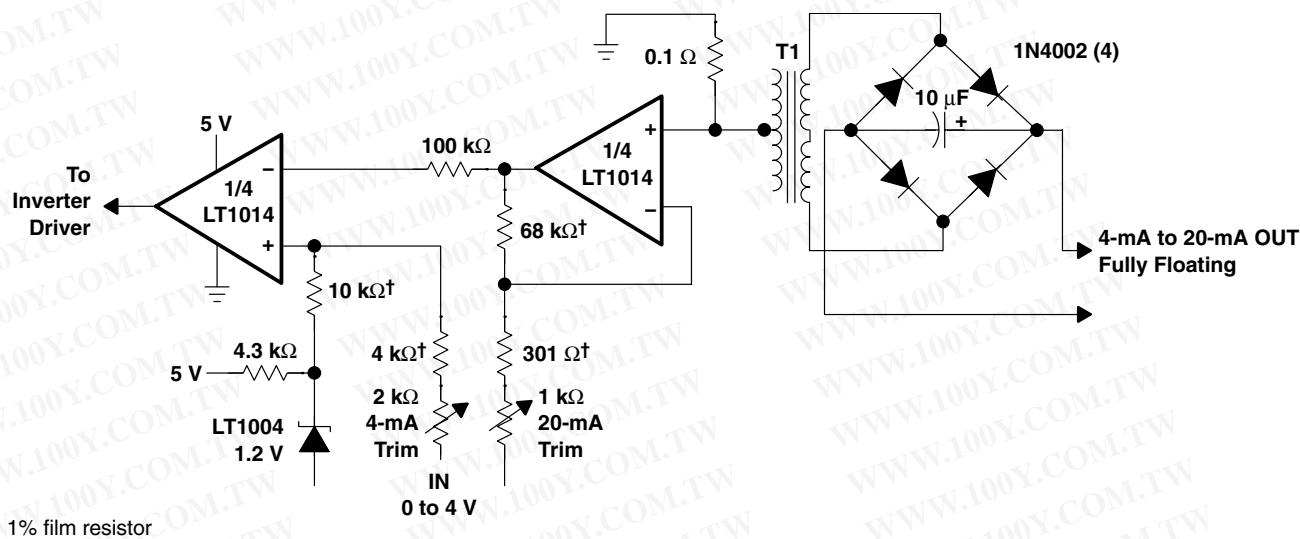

**Figure 31. Fully Floating Modification to 4-mA to 20-mA Current-Loop Transmitter With 8-Bit Accuracy**

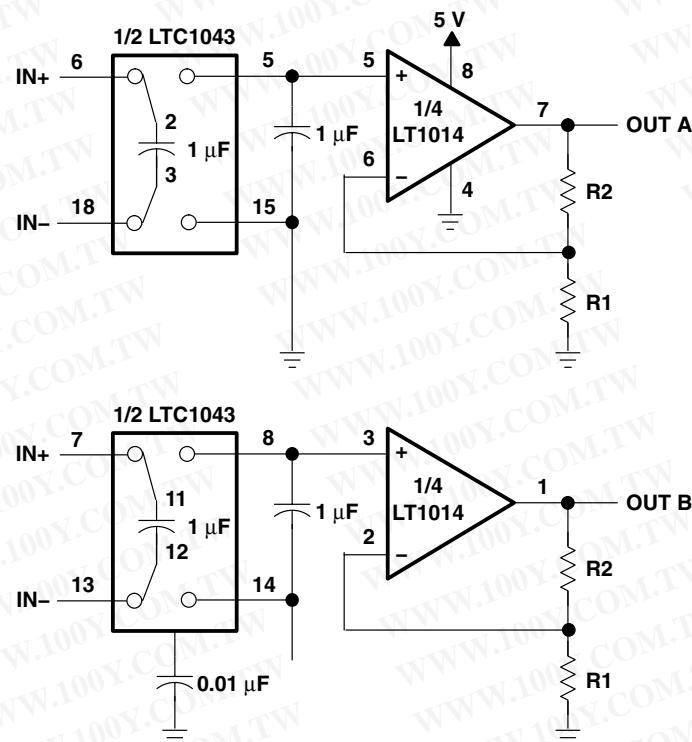


NOTE A:  $V_{IO} = 150 \mu V$ ,  $A_{VD} = (R1/R2) + 1$ ,  $CMRR = 120 \text{ dB}$ ,  $V_{ICR} = 0 \text{ to } 5 \text{ V}$

勝特力材料 886-3-5753170  
胜特力电子(上海) 86-21-34970699  
胜特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

**Figure 32. 5-V Single-Supply Dual Instrumentation Amplifier**

### APPLICATION INFORMATION

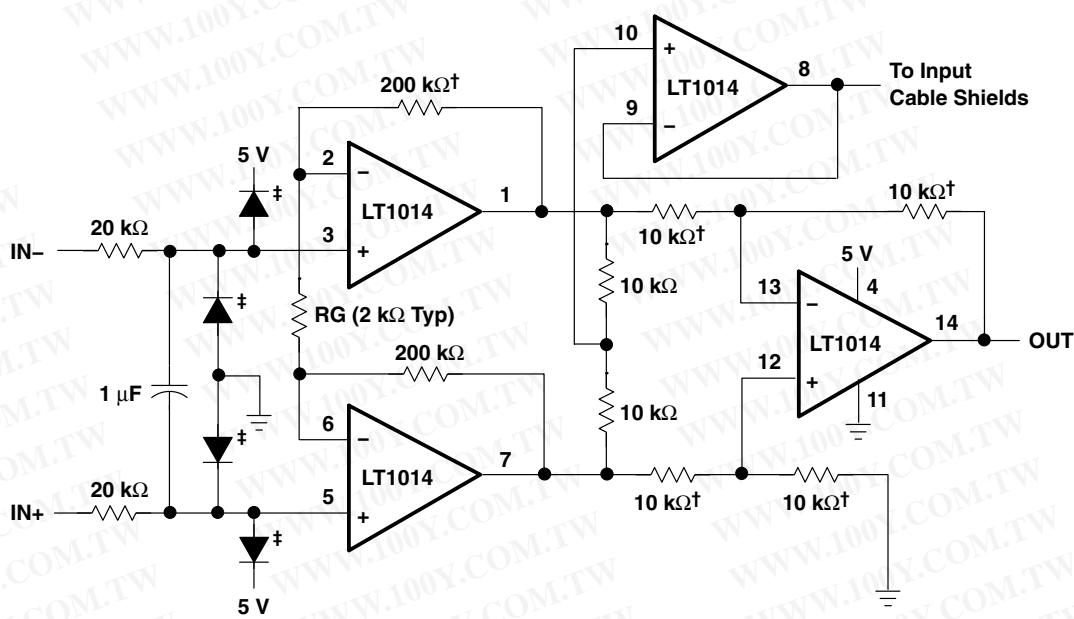

†† 1% film resistor. Match 10-kΩ resistors 0.05%.

‡ For high source impedances, use 2N2222 as diodes (with collector connected to base).

NOTE A:  $A_{VD} = (400,000/RG) + 1$

**Figure 33. 5-V Powered Precision Instrumentation Amplifier**

勝特力材料 886-3-5753170  
 胜特力电子(上海) 86-21-34970699  
 胜特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)



www.ti.com

## PACKAGE OPTION ADDENDUM

勝特力材料 886-3-5753170  
胜特力电子(上海) 86-21-34970699  
胜特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

7-Jun-2010

## PACKAGING INFORMATION

Orderable Device	Status <sup>(1)</sup>	Package Type	Package Drawing	Pins	Package Qty	Eco Plan <sup>(2)</sup>	Lead/Ball Finish	MSL Peak Temp <sup>(3)</sup>	Samples (Requires Login)
5962-89677012A	ACTIVE	LCCC	FK	20	1	TBD	POST-PLATE	N / A for Pkg Type	<a href="#">Purchase Samples</a>
5962-8967701CA	ACTIVE	CDIP	J	14	1	TBD	A42	N / A for Pkg Type	<a href="#">Purchase Samples</a>
5962-89677022A	ACTIVE	LCCC	FK	20	1	TBD	POST-PLATE	N / A for Pkg Type	<a href="#">Purchase Samples</a>
5962-8967702CA	ACTIVE	CDIP	J	14	1	TBD	A42	N / A for Pkg Type	<a href="#">Purchase Samples</a>
LT1014AMFKB	ACTIVE	LCCC	FK	20	1	TBD	POST-PLATE	N / A for Pkg Type	Contact TI Distributor or Sales Office
LT1014AMJ	ACTIVE	CDIP	J	14	1	TBD	A42	N / A for Pkg Type	Contact TI Distributor or Sales Office
LT1014AMJB	ACTIVE	CDIP	J	14	1	TBD	A42	N / A for Pkg Type	Contact TI Distributor or Sales Office
LT1014CN	ACTIVE	PDIP	N	14	25	Pb-Free (RoHS)	CU NIPDAU	N / A for Pkg Type	Contact TI Distributor or Sales Office
LT1014CNE4	ACTIVE	PDIP	N	14	25	Pb-Free (RoHS)	CU NIPDAU	N / A for Pkg Type	Contact TI Distributor or Sales Office
LT1014DDW	ACTIVE	SOIC	DW	16	40	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	<a href="#">Purchase Samples</a>
LT1014DDWE4	ACTIVE	SOIC	DW	16	40	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	<a href="#">Purchase Samples</a>
LT1014DDWG4	ACTIVE	SOIC	DW	16	40	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	<a href="#">Purchase Samples</a>
LT1014DDWR	ACTIVE	SOIC	DW	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	<a href="#">Purchase Samples</a>
LT1014DDWRE4	ACTIVE	SOIC	DW	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	<a href="#">Purchase Samples</a>
LT1014DDWRG4	ACTIVE	SOIC	DW	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	<a href="#">Purchase Samples</a>
LT1014DIDW	ACTIVE	SOIC	DW	16	40	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	Contact TI Distributor or Sales Office
LT1014DIDWG4	ACTIVE	SOIC	DW	16	40	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	Contact TI Distributor or Sales Office
LT1014DIDWR	ACTIVE	SOIC	DW	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	Contact TI Distributor or Sales Office



www.ti.com

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## PACKAGE OPTION ADDENDUM

7-Jun-2010

Orderable Device	Status <sup>(1)</sup>	Package Type	Package Drawing	Pins	Package Qty	Eco Plan <sup>(2)</sup>	Lead/Ball Finish	MSL Peak Temp <sup>(3)</sup>	Samples (Requires Login)
LT1014DIDWRG4	ACTIVE	SOIC	DW	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	Contact TI Distributor or Sales Office
LT1014DIN	ACTIVE	PDIP	N	14	25	Pb-Free (RoHS)	CU NIPDAU	N / A for Pkg Type	Contact TI Distributor or Sales Office
LT1014DINE4	ACTIVE	PDIP	N	14	25	Pb-Free (RoHS)	CU NIPDAU	N / A for Pkg Type	Contact TI Distributor or Sales Office
LT1014DMDW	ACTIVE	SOIC	DW	16	40	TBD	CU NIPDAU	Level-1-220C-UNLIM	<a href="#">Purchase Samples</a>
LT1014DMDWG4	ACTIVE	SOIC	DW	16	40	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	<a href="#">Purchase Samples</a>
LT1014DN	ACTIVE	PDIP	N	14	25	Pb-Free (RoHS)	CU NIPDAU	N / A for Pkg Type	Contact TI Distributor or Sales Office
LT1014DNE4	ACTIVE	PDIP	N	14	25	Pb-Free (RoHS)	CU NIPDAU	N / A for Pkg Type	Contact TI Distributor or Sales Office
LT1014IN	OBsolete	PDIP	N	14		TBD	Call TI	Call TI	Samples Not Available
LT1014MFKB	ACTIVE	LCCC	FK	20	1	TBD	POST-PLATE	N / A for Pkg Type	Contact TI Distributor or Sales Office
LT1014MJ	ACTIVE	CDIP	J	14	1	TBD	A42	N / A for Pkg Type	Contact TI Distributor or Sales Office
LT1014MJB	ACTIVE	CDIP	J	14	1	TBD	A42	N / A for Pkg Type	Contact TI Distributor or Sales Office

<sup>(1)</sup> The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBsolete:** TI has discontinued the production of the device.

<sup>(2)</sup> Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

**TBD:** The Pb-Free/Green conversion plan has not been defined.

**Pb-Free (RoHS):** TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

**Green (RoHS & no Sb/Br):** TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)



www.ti.com

## PACKAGE OPTION ADDENDUM

7-Jun-2010

(<sup>3</sup>) MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

### OTHER QUALIFIED VERSIONS OF LT1014D :

- Enhanced Product: [LT1014D-EP](#)


NOTE: Qualified Version Definitions:

- Enhanced Product - Supports Defense, Aerospace and Medical Applications


勝特力材料 886-3-5753170  
胜特力电子(上海) 86-21-34970699  
胜特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## TAPE AND REEL INFORMATION

### REEL DIMENSIONS

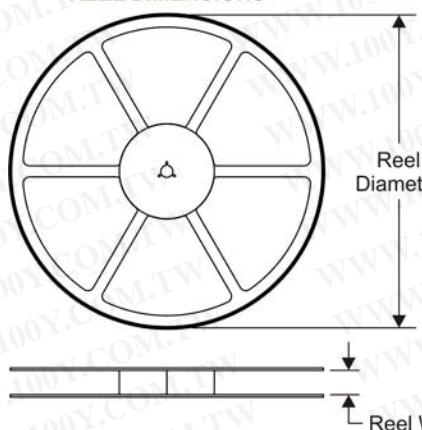


### TAPE DIMENSIONS

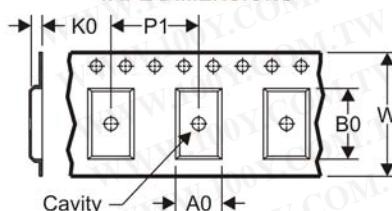

$A_0$	Dimension designed to accommodate the component width
$B_0$	Dimension designed to accommodate the component length
$K_0$	Dimension designed to accommodate the component thickness
$W$	Overall width of the carrier tape
$P_1$	Pitch between successive cavity centers

### QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

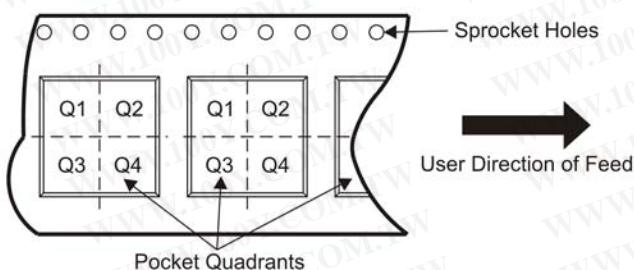


\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
LT1014DDWR	SOIC	DW	16	2000	330.0	16.4	10.75	10.7	2.7	12.0	16.0	Q1
LT1014DIDWR	SOIC	DW	16	2000	330.0	16.4	10.75	10.7	2.7	12.0	16.0	Q1

勝特力材料 886-3-5753170  
 胜特力电子(上海) 86-21-34970699  
 胜特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## TAPE AND REEL BOX DIMENSIONS

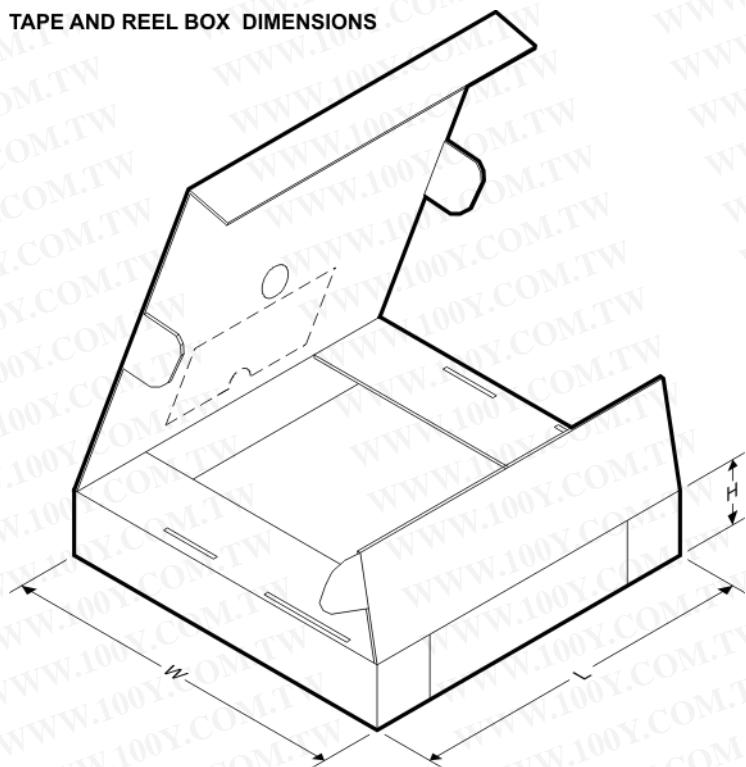

\*All dimensions are nominal


Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
LT1014DDWR	SOIC	DW	16	2000	346.0	346.0	33.0
LT1014DIDWR	SOIC	DW	16	2000	346.0	346.0	33.0

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-34970699  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)



J (R-GDIP-T\*\*)

14 LEADS SHOWN

CERAMIC DUAL IN-LINE PACKAGE

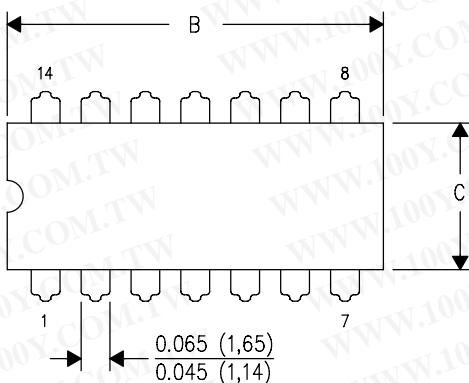

PINS **\nDIM	14	16	18	20
A	0.300 (7,62) BSC	0.300 (7,62) BSC	0.300 (7,62) BSC	0.300 (7,62) BSC
B MAX	0.785 (19,94)	.840 (21,34)	0.960 (24,38)	1.060 (26,92)
B MIN	—	—	—	—
C MAX	0.300 (7,62)	0.300 (7,62)	0.310 (7,87)	0.300 (7,62)
C MIN	0.245 (6,22)	0.245 (6,22)	0.220 (5,59)	0.245 (6,22)

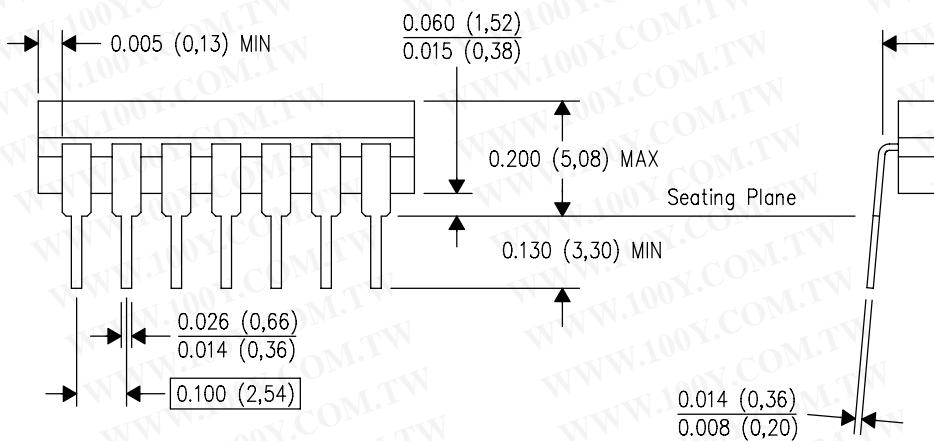

4040083/F 03/03


- NOTES:
- A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - C. This package is hermetically sealed with a ceramic lid using glass frit.
  - D. Index point is provided on cap for terminal identification only on press ceramic glass frit seal only.
  - E. Falls within MIL STD 1835 GDIP1-T14, GDIP1-T16, GDIP1-T18 and GDIP1-T20.

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-34970699  
勝特力电子(深圳) 86-755-83298787  
Http://www.100y.com.tw

## FK (S-CQCC-N\*\*)

28 TERMINAL SHOWN

## LEADLESS CERAMIC CHIP CARRIER

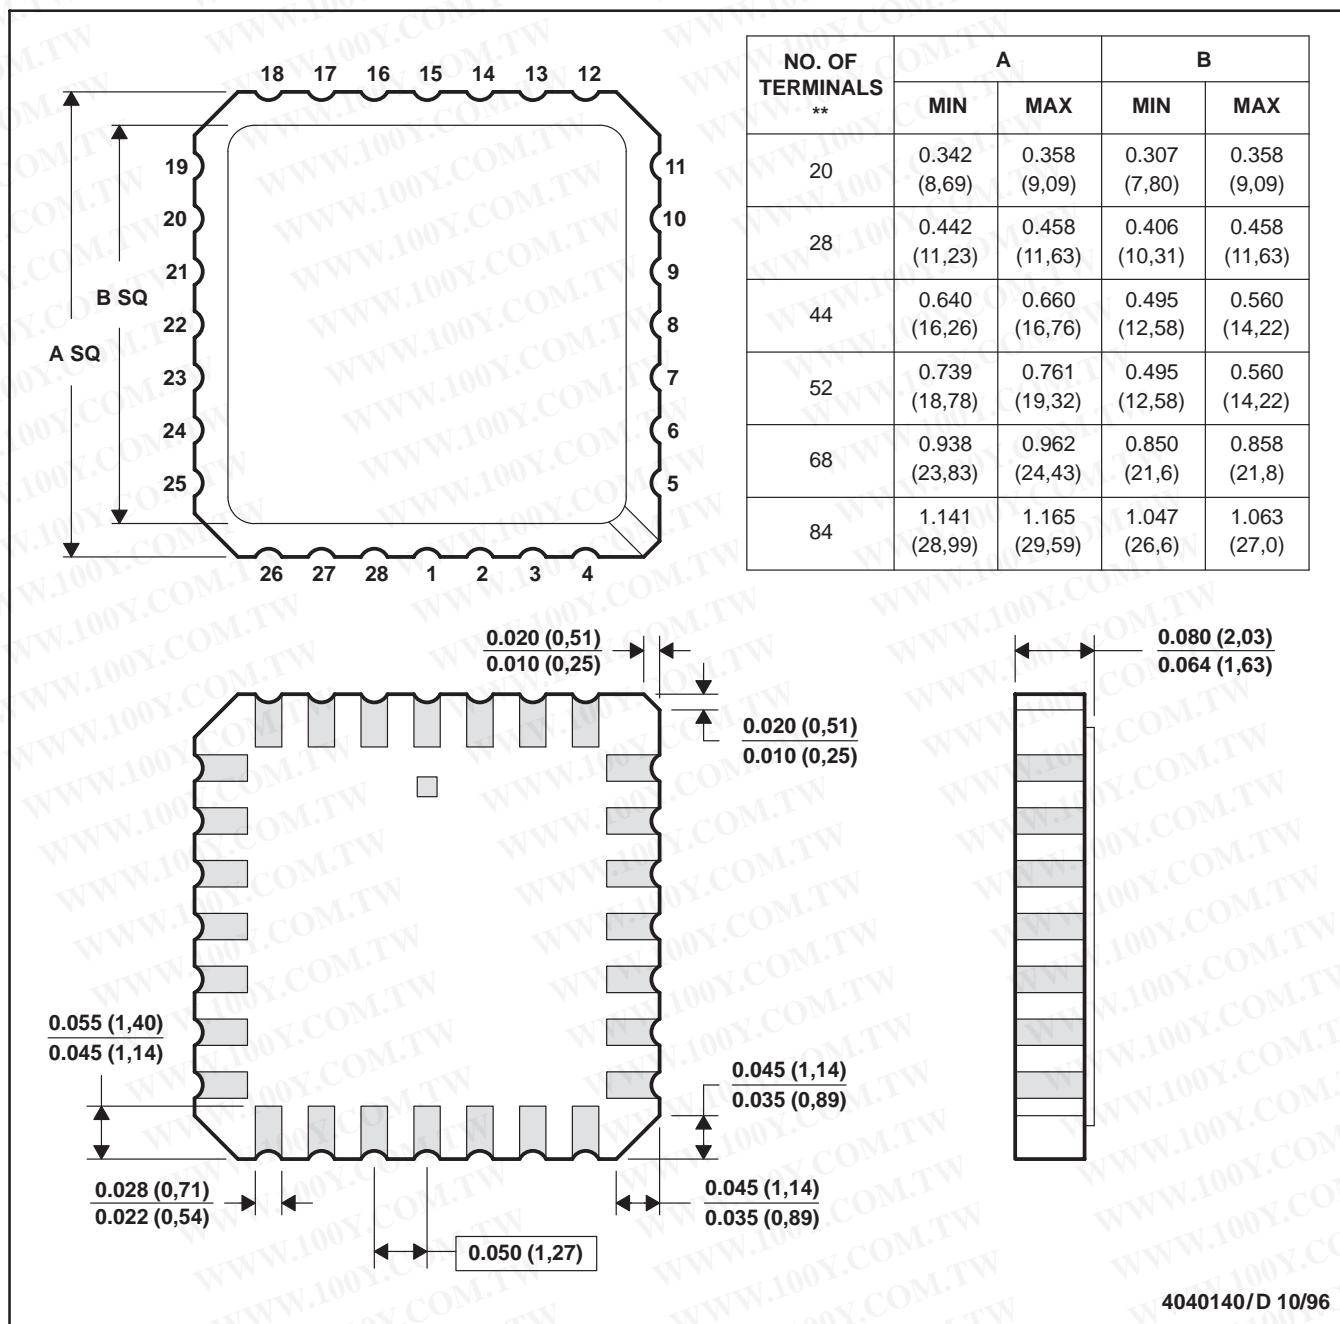


- NOTES:
- All linear dimensions are in inches (millimeters).
  - This drawing is subject to change without notice.
  - This package can be hermetically sealed with a metal lid.
  - The terminals are gold plated.
  - Falls within JEDEC MS-004

勝特力材料 886-3-5753170  
 胜特力电子(上海) 86-21-34970699  
 胜特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## DW (R-PDSO-G16)

## PLASTIC SMALL-OUTLINE PACKAGE

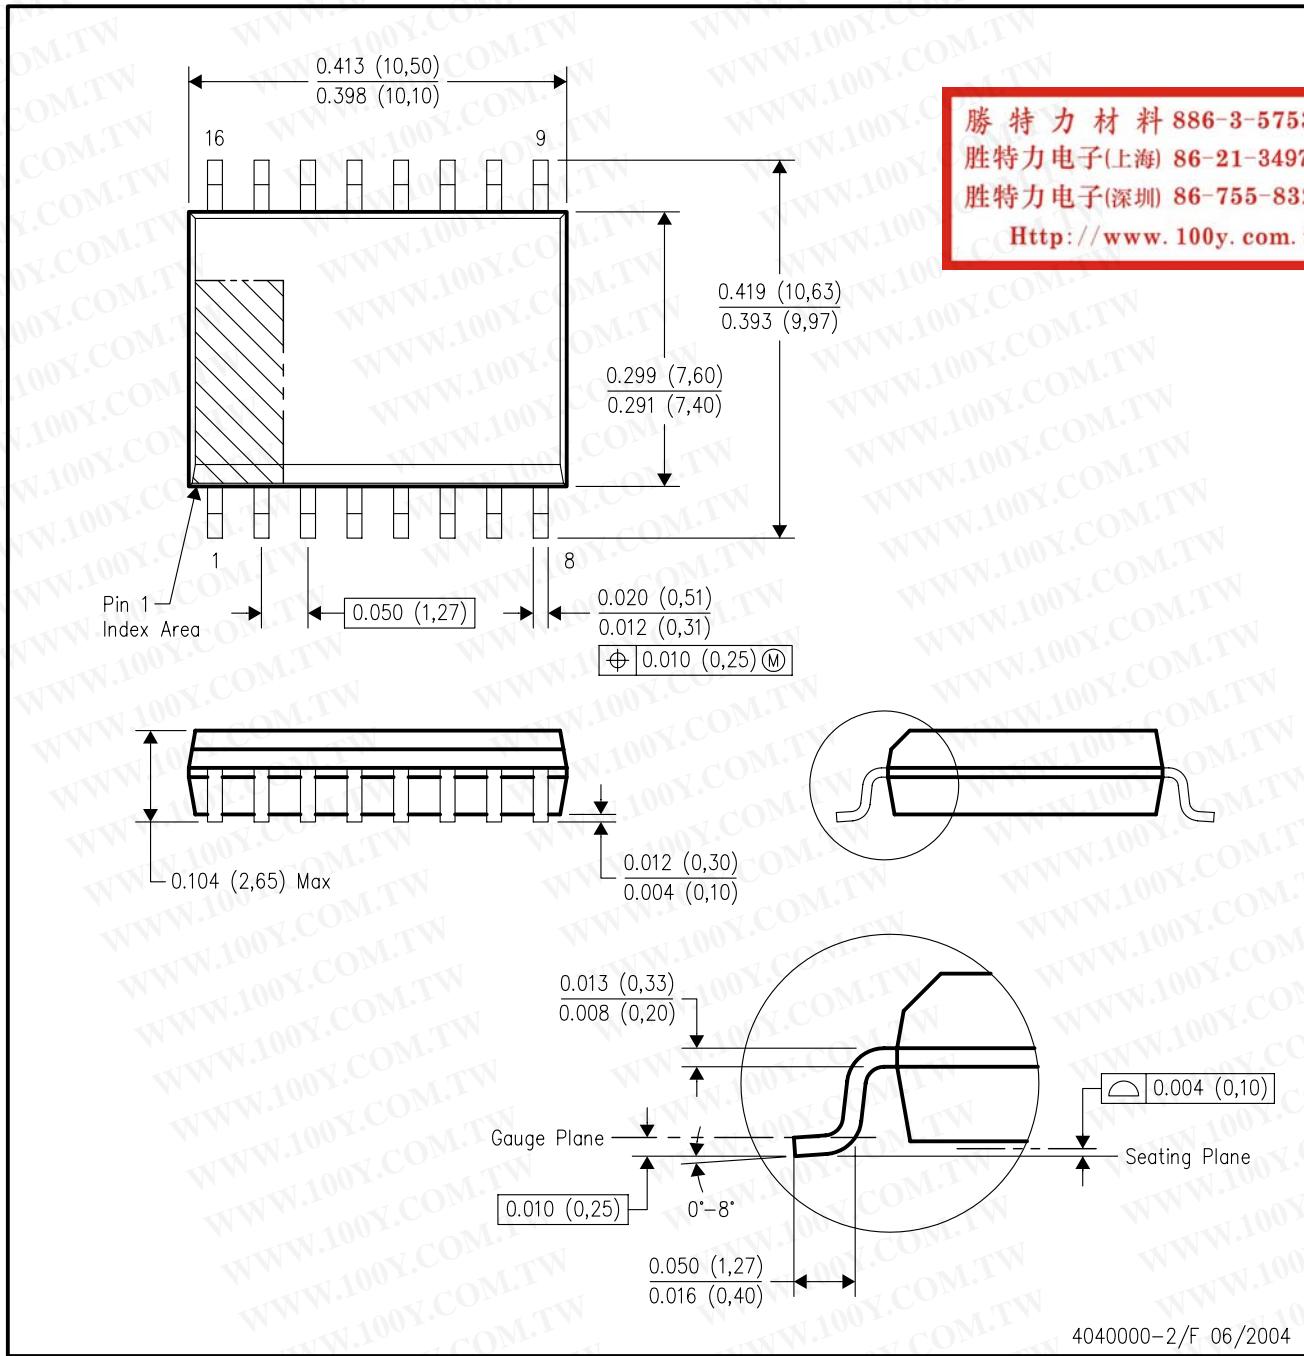

勝特力材料 886-3-5753170  
胜特力电子(上海) 86-21-34970699  
胜特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)