



REV	ZONE	REVISION	DATE

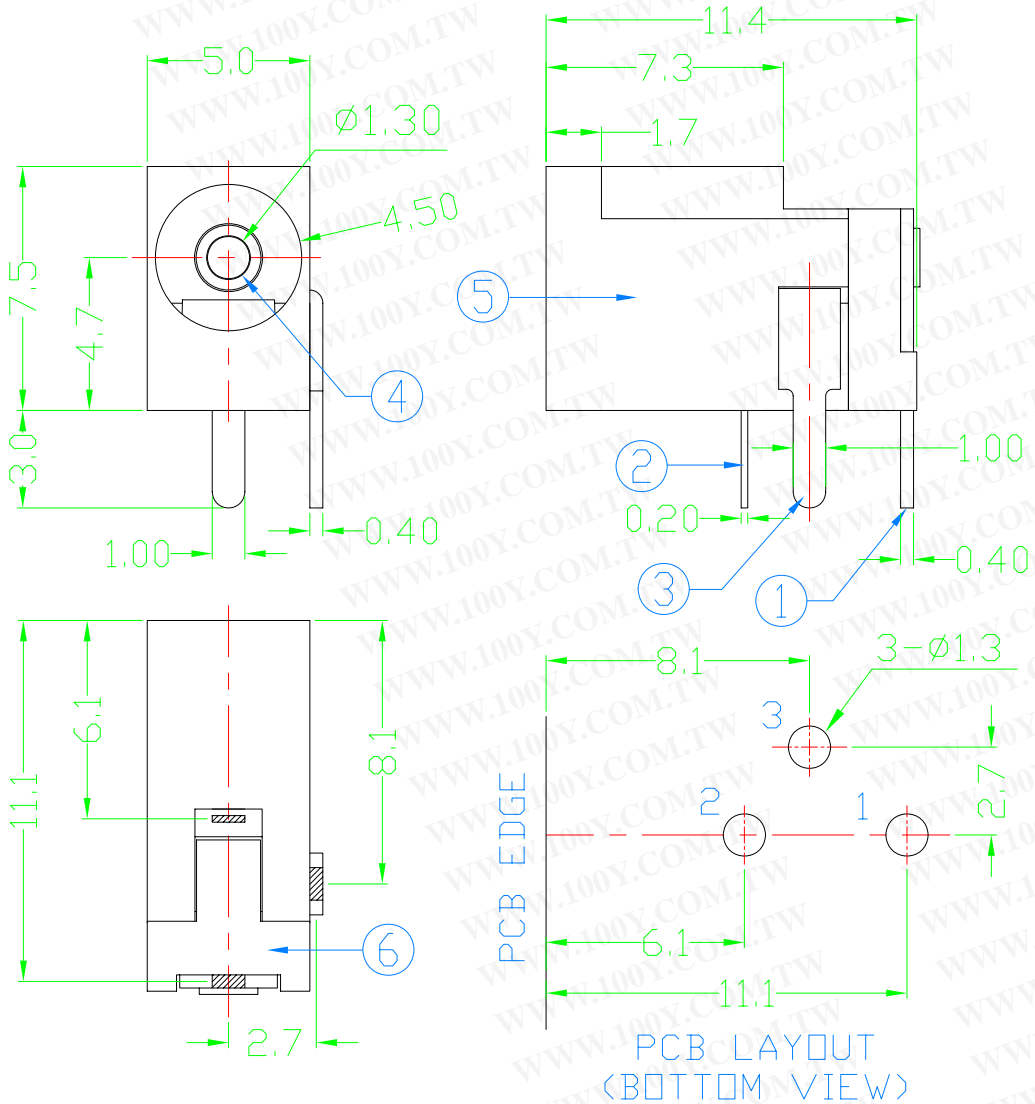

NO.	NAME	MATERIAL	FINISH	Q'TY
1	PIN TERM.	BRASS 0.4	TIN PLATED	1
2	SLEEVE TREM.	P.B.S 0.2	TIN PLATED	1
3	BREAK TERM.	BRASS 0.4	TIN PLATED	1
4	CENTER PIN	BRASS Ø1.3	NICKEL PLATED	1
5	HOUSING	PBT G.F.	BLACK	1
6	BACK COVER	PBT G.F.	BLACK	1

**Green Product**



**Specification:**

- Contact Resistance: 30m Ohm Max. At AC 100mA Max 1KHz
- Insulation Resistance: 100M Ohm Min. At 500V DC
- Rated Voltage And Current: DC12V, 2A Max; AC 100V, 1A Max
- Dielectric Withstanding Voltage: 500V AC for 1 Minute
- Insertion Force: 3.0Kg Maximum.
- Extraction Force: 0.3Kg Minimum.

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

COMPUTER NO.			UNIT	SCALE	PART NAME	
D:\DWG\KD-011A-L			mm	1:1	DC POWER JACK	
APPD.	CKD.	DWG.	DATE	TOLERANCE		PART NO. REV.
TINA			30-12-08	X. ±0.38		A0
				.X ±0.25		
				.XX ±0.13		
				.XXX ±0.05		

MODEL KD-011A-L PAGE 1 OF 1