

DS89C21

Differential CMOS Line Driver and Receiver Pair

General Description

The DS89C21 is a differential CMOS line driver and receiver pair, designed to meet the requirements of TIA/EIA-422-A (RS-422) electrical characteristics interface standard. The DS89C21 provides one driver and one receiver in a minimum footprint. The device is offered in an 8-pin SOIC package.

The CMOS design minimizes the supply current to 6 mA, making the device ideal for use in battery powered or power conscious applications.

The driver features a fast transition time specified at 2.2 ns, and a maximum differential skew of 2 ns making the driver ideal for use in high speed applications operating above 10 MHz.


The receiver can detect signals as low as 200 mV, and also incorporates hysteresis for noise rejection. Skew is specified at 4 ns maximum.

The DS89C21 is compatible with TTL and CMOS levels (DI and RO).

Features

- Meets TIA/EIA-422-A (RS-422) and CCITT V.11 recommendation
- LOW POWER design—15 mW typical
- Guaranteed AC parameters:
 - Maximum driver skew 2.0 ns
 - Maximum receiver skew 4.0 ns
- Extended temperature range: -40°C to $+85^{\circ}\text{C}$
- Available in SOIC packaging
- Operates over 20 Mbps
- Receiver OPEN input failsafe feature

Connection Diagram

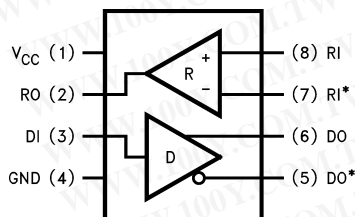

01175301

Order Number DS89C21TM
See NS Package Number M08A

Truth Tables

Driver

| Input | Outputs | |
|-------|---------|-----|
| DI | DO | DO* |
| H | H | L |
| L | L | H |

Receiver

| Inputs | Output |
|--|--------|
| RI-RI* | RO |
| $V_{\text{DIFF}} \geq +200 \text{ mV}$ | H |
| $V_{\text{DIFF}} \leq -200 \text{ mV}$ | L |
| OPEN† | H |

†Non-terminated

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

| | |
|---|--------------------------|
| Supply Voltage (V_{CC}) | 7V |
| Driver Input Voltage (DI) | -1.5V to $V_{CC} + 1.5V$ |
| Driver Output Voltage (DO, DO*) | -0.5V to +7V |
| Receiver Input Voltage— V_{CM} | |
| (RI, RI*) | $\pm 14V$ |
| Differential Receiver Input Voltage— V_{DIFF} (RI, RI*) | $\pm 14V$ |
| Receiver Output Voltage (RO) | -0.5V to $V_{CC} + 0.5V$ |
| Receiver Output Current (RO) | $\pm 25\text{ mA}$ |
| Storage Temperature Range | |

(T_{STG}) -65°C to +150°C

Lead Temperature (T_L) +260°C

(Soldering 4 sec.)

Maximum Junction Temperature 150°C

Maximum Package Power Dissipation @+25°C

M Package 714 mW

Derate M Package 5.7 mW/°C above +25°C

Recommended Operating Conditions

| | Min | Max | Units |
|---------------------------------|------|------|-------|
| Supply Voltage (V_{CC}) | 4.50 | 5.50 | V |
| Operating Temperature (T_A) | -40 | +85 | °C |
| Input Rise or Fall Time (DI) | | 500 | ns |

Electrical Characteristics (Notes 2, 3)

Over recommended supply voltage and operating temperature ranges, unless otherwise specified.

| Symbol | Parameter | Conditions | | Pin | Min | Typ | Max | Units |
|-----------------------------------|---|---|---------------------------|------------|-------|-------|-----------------|-------|
| DRIVER CHARACTERISTICS | | | | | | | | |
| V _{IH} | Input Voltage HIGH | | | DI | 2.0 | | V _{CC} | V |
| V _{IL} | Input Voltage LOW | | | | GND | | 0.8 | V |
| I _{IH} , I _{IL} | Input Current | V _{IN} = V _{CC} , GND, 2.0V, 0.8V | | | | 0.05 | ±10 | μA |
| V _{CL} | Input Clamp Voltage | I _{IN} = -18 mA | | | | | -1.5 | V |
| V _{OD1} | Unloaded Output Voltage | No Load | | DO, DO* | | 4.2 | 6.0 | V |
| V _{OD2} | Differential Output Voltage | R _L = 100Ω | | | 2.0 | 3.0 | | V |
| ΔV _{OD2} | Change in Magnitude of V _{OD2} for Complementary Output States | | | | | 5.0 | 400 | mV |
| V _{OD3} | Differential Output Voltage | R _L = 150Ω | | | 2.1 | 3.1 | | V |
| V _{OD4} | Differential Output Voltage | R _L = 3.9 kΩ | | | | 4.0 | 6.0 | V |
| V _{OC} | Common Mode Voltage | R _L = 100Ω | | | | 2.0 | 3.0 | V |
| ΔV _{OC} | Change in Magnitude of V _{OC} for Complementary Output States | | | | | 2.0 | 400 | mV |
| I _{OSD} | Output Short Circuit Current | V _{OUT} = 0V | | | -30 | -115 | -150 | mA |
| I _{OFF} | Output Leakage Current | V _{CC} = 0V | V _{OUT} = +6V | | 0.03 | +100 | μA | |
| | | | V _{OUT} = -0.25V | | -0.08 | -100 | μA | |
| RECEIVER CHARACTERISTICS | | | | | | | | |
| V _{TL} , V _{TH} | Differential Thresholds | V _{IN} = +7V, 0V, -7V | | RI, RI* | -200 | ±25 | +200 | mV |
| V _{HYS} | Hysteresis | V _{CM} = 0V | | | 20 | 50 | | mV |
| R _{IN} | Input Impedance | V _{IN} = -7V, +7V, Other = 0V | | | 5.0 | 9.5 | | kΩ |
| I _{IN} | Input Current | Other Input = 0V, V _{CC} = 5.5V and V _{CC} = 0V | V _{IN} = +10V | | | +1.0 | +1.5 | mA |
| | | | V _{IN} = +3.0V | | | 0 | +0.22 | mA |
| | | | V _{IN} = +0.5V | | | | -0.04 | mA |
| | | | V _{IN} = -3V | | | 0 | -0.41 | mA |
| | | | V _{IN} = -10V | | | -1.25 | -2.5 | mA |

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Electrical Characteristics (Notes 2, 3) (Continued)

Over recommended supply voltage and operating temperature ranges, unless otherwise specified.

| Symbol | Parameter | Conditions | Pin | Min | Typ | Max | Units |
|--|------------------------------|---|----------|-----|------|------|-------|
| RECEIVER CHARACTERISTICS | | | | | | | |
| V_{OH} | Output HIGH Voltage | $I_{OH} = -6 \text{ mA}$ | RO | 3.8 | 4.9 | | V |
| | | $V_{DIFF} = +1\text{V}$ | | 3.8 | 4.9 | | V |
| | | $V_{DIFF} = \text{OPEN}$ | | | | | |
| V_{OL} | Output LOW Voltage | $I_{OL} = +6 \text{ mA}, V_{DIFF} = -1\text{V}$ | | | 0.08 | 0.3 | V |
| I_{OSR} | Output Short Circuit Current | $V_{OUT} = 0\text{V}$ | | -25 | -85 | -150 | mA |
| DRIVER AND RECEIVER CHARACTERISTICS | | | | | | | |
| I_{CC} | Supply Current | No Load | V_{CC} | | 3.0 | 6 | mA |
| | | $DI = V_{CC} \text{ or GND}$ | | | | | |
| | | $DI = 2.4\text{V or } 0.5\text{V}$ | | | 3.8 | 12 | mA |

Switching Characteristics (Note 3)

Over recommended supply voltage and operating temperature ranges, unless otherwise specified.

| Symbol | Parameter | Conditions | | Min | Typ | Max | Units |
|-------------------------------------|--|--|----------------|-----|------|-----|-------|
| DIFFERENTIAL DRIVER CHARACTERISTICS | | | | | | | |
| t _{PLHD} | Propagation Delay LOW to HIGH | R _L = 100Ω C _L = 50 pF | (Figures 2, 3) | 2 | 4.9 | 10 | ns |
| t _{PHLD} | Propagation Delay HIGH to LOW | | | 2 | 4.5 | 10 | ns |
| t _{SKD} | Skew, t _{PLHD} - t _{PHLD} | | | 0.4 | 2.0 | ns | |
| t _{TLH} | Transition Time LOW to HIGH | | (Figures 2, 4) | | 2.2 | 9 | ns |
| t _{THL} | Transition Time HIGH to LOW | | | | 2.1 | 9 | ns |
| RECEIVER CHARACTERISTICS | | | | | | | |
| t _{PLH} | Propagation Delay LOW to HIGH | C _L = 50 pF V _{DIFF} = 2.5V V _{CM} = 0V | (Figures 5, 6) | 6 | 18 | 30 | ns |
| t _{PHL} | Propagation Delay HIGH to LOW | | | 6 | 17.5 | 30 | ns |
| t _{SK} | Skew, t _{PLH} - t _{PHL} | | | | 0.5 | 4.0 | ns |
| t _r | Rise Time | | (Figure 7) | | 2.5 | 9 | ns |
| t _f | Fall Time | | | | 2.1 | 9 | ns |

Note 1: "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. They are not meant to imply that the devices should be operated at these limits. The tables of "Electrical Characteristics" specify conditions for device operation.

Note 2: Current into device pins is defined as positive. Current out of device pins is defined as negative. All voltages are referenced to ground unless otherwise specified.

Note 3: All typicals are given for $V_{CC} = 5.0\text{V}$ and $T_A = 25^\circ\text{C}$.

Note 4: $f = 1 \text{ MHz}$, t_r and $t_f \leq 6 \text{ ns}$.

Note 5: ESD Rating: HBM (1.5 k Ω , 100 pF) all pins $\geq 2000\text{V}$.

EIAJ (0 Ω , 200 pF) $\geq 250\text{V}$

Parameter Measurement Information

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)


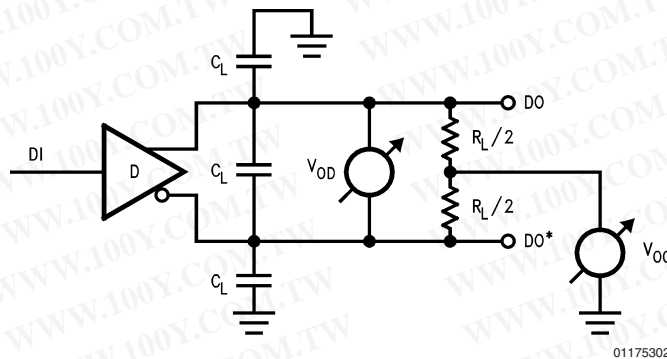


FIGURE 1. V_{OD} and V_{OC} Test Circuit


Parameter Measurement Information (Continued)

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

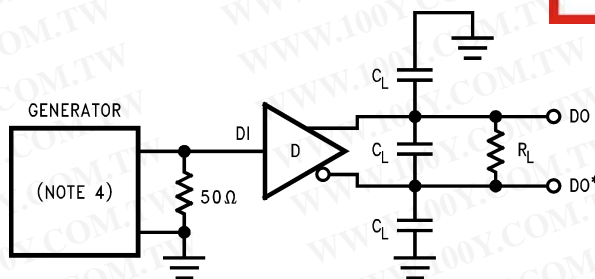


01175303

FIGURE 2. Driver Propagation Delay Test Circuit

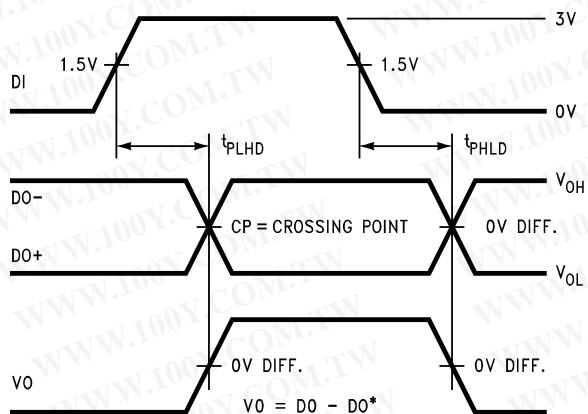


01175304

FIGURE 3. Driver Differential Propagation Delay Timing

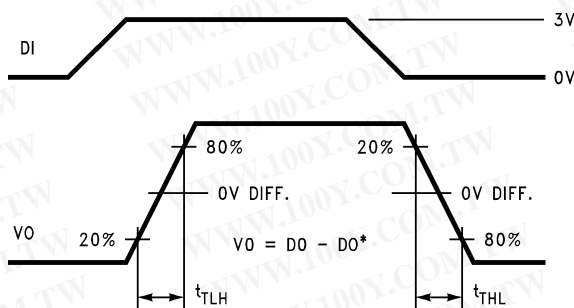

01175305

FIGURE 4. Driver Differential Transition Timing

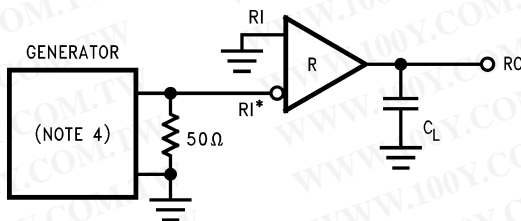

01175306

FIGURE 5. Receiver Propagation Delay Test Circuit

Parameter Measurement Information (Continued)

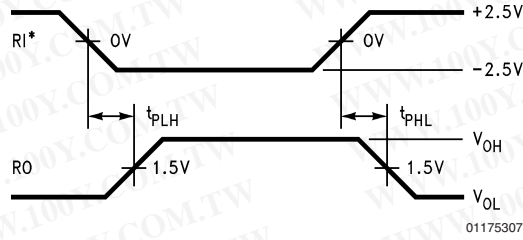


FIGURE 6. Receiver Propagation Delay Timing


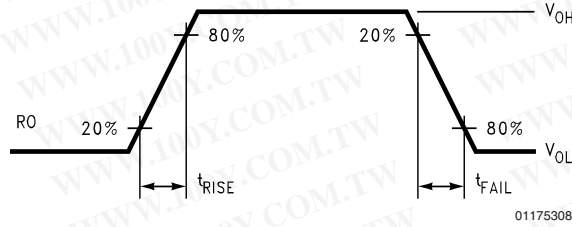


FIGURE 7. Receiver Rise and Fall Times

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Physical Dimensions inches (millimeters) unless otherwise noted

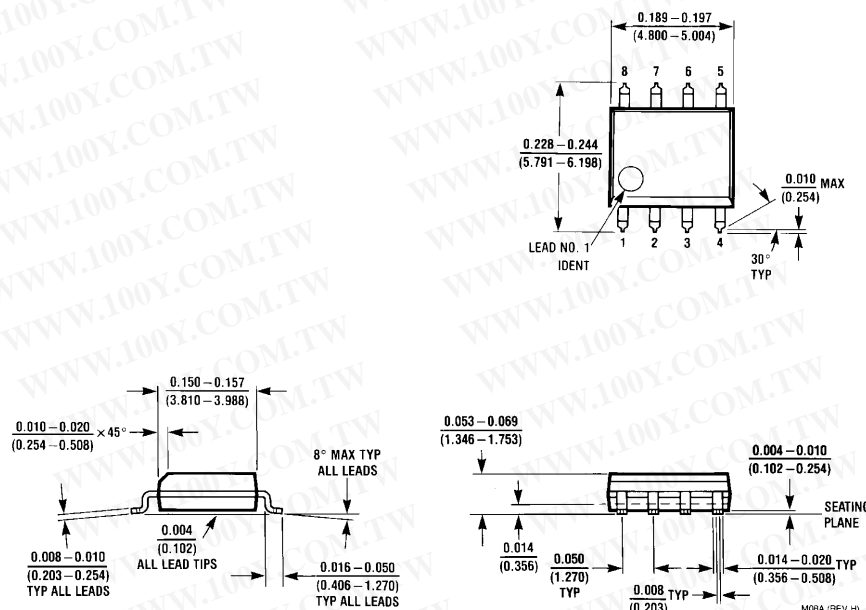

Order Number DS89C21TM
NS Package Number M08A

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.

For the most current product information visit us at www.national.com.

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT AND GENERAL COUNSEL OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

BANNED SUBSTANCE COMPLIANCE

National Semiconductor certifies that the products and packing materials meet the provisions of the Customer Products Stewardship Specification (CSP-9-111C2) and the Banned Substances and Materials of Interest Specification (CSP-9-111S2) and contain no "Banned Substances" as defined in CSP-9-111S2.



National Semiconductor
Americas Customer
Support Center
Email: new.feedback@nsc.com
Tel: 1-800-272-9959

National Semiconductor
Europe Customer Support Center
Fax: +49 (0) 180-530 85 86
Email: europa.support@nsc.com
Deutsch Tel: +49 (0) 69 9508 6208
English Tel: +44 (0) 870 24 0 2171
Français Tel: +33 (0) 1 41 91 8790

National Semiconductor
Asia Pacific Customer
Support Center
Email: ap.support@nsc.com

National Semiconductor
Japan Customer Support Center
Fax: 81-3-5639-7507
Email: jpn.feedback@nsc.com
Tel: 81-3-5639-7560

www.national.com