

不锈钢2.4/SMP-JK(DC-40G)

1

2.4MM公头


2

SMP母头



产品型号Model: 2.4/SMP-JKG

频率Frequency:DC-40GHz

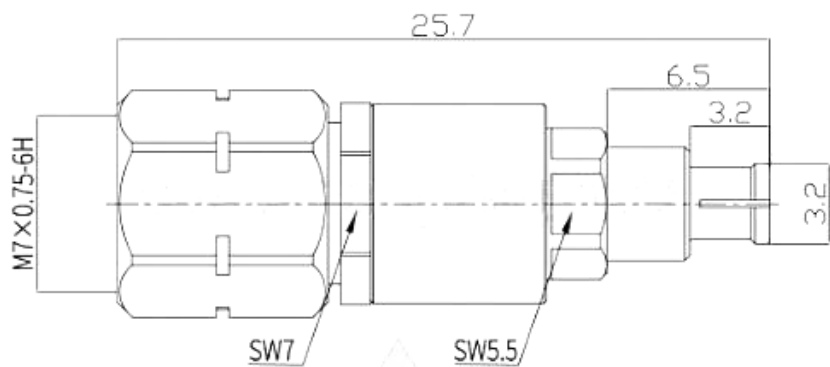

注 Note: 尺寸 Dimensions (mm)

产品参数 Product parameters

1.电气 Electrical

1.1	阻抗 Impedance	50Ω
1.2	频率范围 Frequency range	DC-40GHz
1.3	驻波 VSWR	≤1.25
1.4	介质耐压 Dielectric withstanding voltage	500V rms
1.5	内导体接触电阻 Internal conductor contact resistance	≤6mΩ
1.6	外导体接触电阻 External conductor contact resistance	≤2mΩ
1.7	绝缘电阻 Insulation resistance	≥1000MΩ

2.环境与机械 Environment and Machinery

2.1	温度范围 Temperature range	-45°~+165°
2.2	耐久性 Durability	500cycles

3.材料和镀层 Material and Plating

3.1	内导体 Inner conductor	铍铜镀金 Beryllium copper gold plating
3.2	外导体 Outer conductor	不锈钢钝化 Stainless steel passivation
3.3	外导体 Outer conductor	铍铜镀金 Beryllium copper gold plating
3.4	绝缘体 Insulator	聚四氟乙烯 PTFE