

不锈钢2.4/SSMA-JJ(DC-40G)


1 2.4MM公头

2 SSMA公头



产品型号Model: 2.4/SSMA-JJG

频率Frequency:DC-40GHz

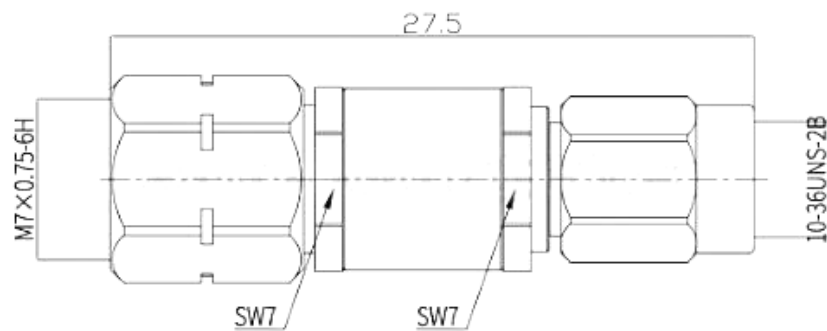

注 Note: 尺寸 Dimensions (mm)

产品参数 Product parameters		
1.电气 Electrical		
1.1	阻抗 Impedance	50Ω
1.2	频率范围 Frequency range	DC-40GHz
1.3	驻波 VSWR	≤1.2
1.4	介质耐压 Dielectric withstanding voltage	500V rms
1.5	内导体接触电阻 Internal conductor contact resistance	≤4mΩ
1.6	外导体接触电阻 External conductor contact resistance	≤2.5mΩ
1.7	绝缘电阻 Insulation resistance	≥1000MΩ
2.环境与机械 Environment and Machinery		
2.1	温度范围 Temperature range	-45°~+165°
2.2	耐久性 Durability	500cycles
3.材料和镀层 Material and Plating		
3.1	内导体 Inner conductor	铍铜镀金 Beryllium copper gold plating
3.2	外导体 Outer conductor	不锈钢钝化 Stainless steel passivation
3.3	绝缘体 Insulator	聚酰亚胺 PEI