

KA2201

1.2W AUDIO POWER AMP


INTRODUCTION

The KA2201 is a monolithic integrated audio amplifier. It is designed for audio frequency class B amplifier.

FEATURES

- Wide operating supply voltage: $V_{CC} = 3V \sim 14V$
- Medium output power.
 $P_O = 1.2W$ at $V_{CC} = 9V$, $R_L = 8\Omega$, THD = 10%.
- Low quiescent circuit current ($I_{CCQ} = 4mA$: Typ).
- Good ripple rejection.
- Minimum number of external parts required.

8-DIP-300



ORDERING INFORMATION

Device	Package	Operating Temperature
KA2201	8-DIP-300	-20°C ~ +70°C

BLOCK DIAGRAM

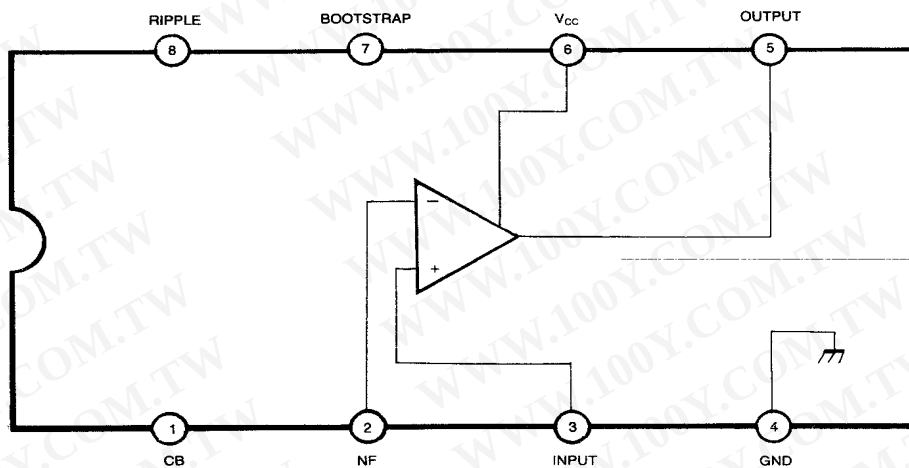


Fig. 1

SAMSUNG

ELECTRONICS

KA2201

1.2W AUDIO POWER AMP

ABSOLUTE MAXIMUM RATINGS

Characteristic	Symbol	value	Unit
Supply Voltage	V_{CC}	16	V
Output Peak Current	I_{PK}	1.5	A
Power Dissipation	P_D	1.25	W
Operating Temperature	T_{OPR}	- 20 ~ + 70	°C
Storage Temperature	T_{STG}	- 40 ~ + 150	°C

ELECTRICAL CHARACTERISTICS

($T_a = 25^\circ\text{C}$, $V_{CC} = 9\text{V}$, $f = 1\text{KHz}$, $R_G = 600\Omega$, $R_F = 120\Omega$, $R_L = 8\Omega$, unless otherwise specified)

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Unit
Quiescent Circuit Current	I_{CCQ}	$V_i = 0$		4	12	mA
Output Power	P_O	$V_{CC} = 9\text{V}$, $R_L = 4\Omega$, THD = 10%	0.9	1.6		W
		$V_{CC} = 9\text{V}$, $R_L = 8\Omega$, THD = 10%		1.2		
		$V_{CC} = 6\text{V}$, $R_L = 4\Omega$, THD = 10%	0.4	0.75		
		$V_{CC} = 6\text{V}$, $R_L = 8\Omega$, THD = 10%		0.5		
Total Harmonic Distortion	THD	$P_O = 500\text{mW}$		0.3	1.0	%
Open Loop Voltage Gain	G_{VO}	$R_F = 0$		75		dB
Closed Loop Voltage Gain	G_{VC}	$R_F = 120\Omega$	33	36	39	dB
Input Resistance	R_i			5		$M\Omega$
Output Noise Voltage	V_{NO}	$R_G = 10\text{K}\Omega$ BW (-3dB) = 50Hz~20KHz		0.3	1.0	mV

TEST CIRCUIT

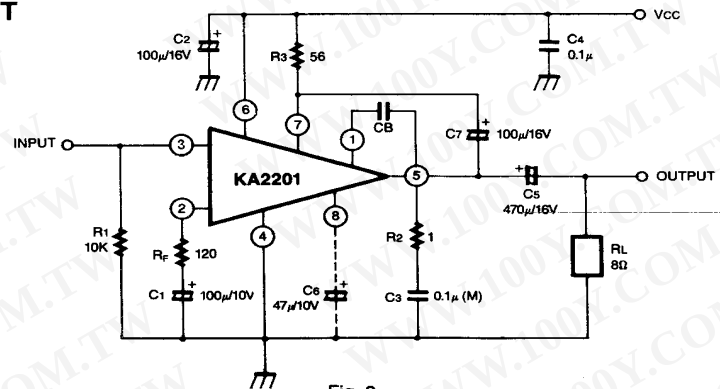


Fig. 2


SAMSUNG

ELECTRONICS


KA2201

1.2W AUDIO POWER AMP


QUIESCENT CIRCUIT CURRENT—SUPPLY VOLTAGE

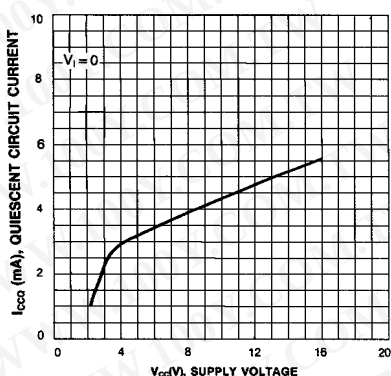


OUTPUT POWER—SUPPLY VOLTAGE

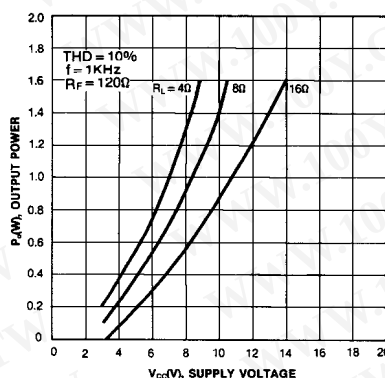


FREQUENCY RESPONSE

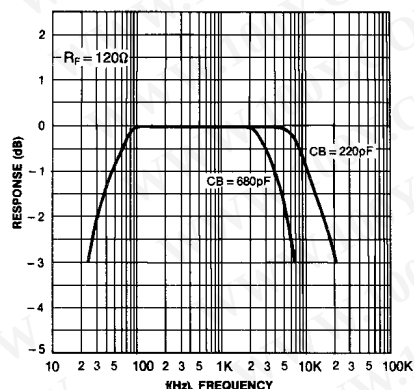


TOTAL HARMONIC DISTORTION—FREQUENCY

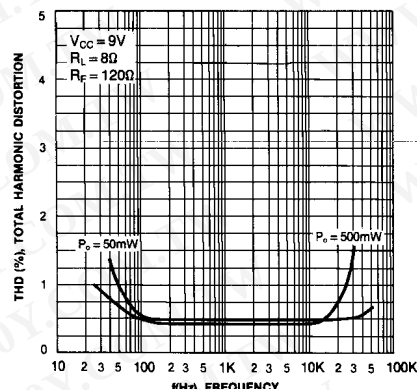

TOTAL HARMONIC DISTORTION—OUTPUT POWER

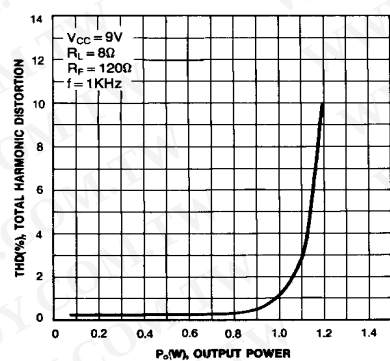

VOLTAGE GAIN—FEEDBACK RESISTANCE


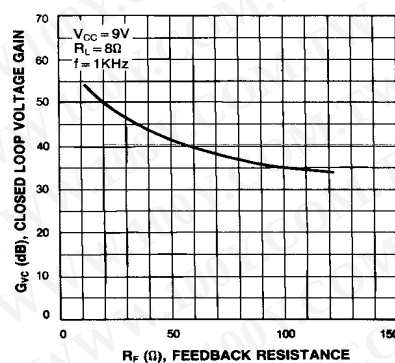


SAMSUNG

ELECTRONICS

KA2201

1.2W AUDIO POWER AMP

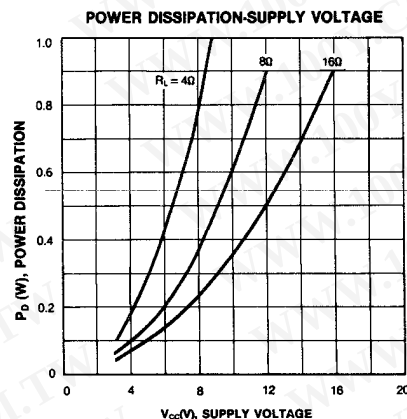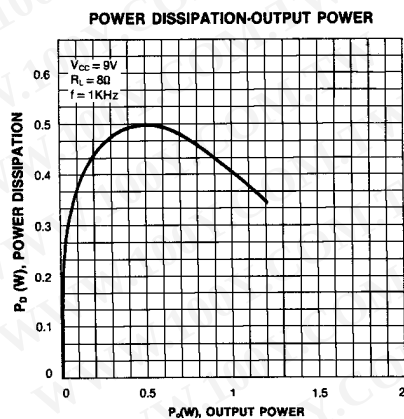

SAMSUNG

ELECTRONICS

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)