


AD-A8A8-BF-G

SMA Jack To SMA Jack Bulkhead
IP67 Mated; 18GHz VSWR 1.2

50Ω

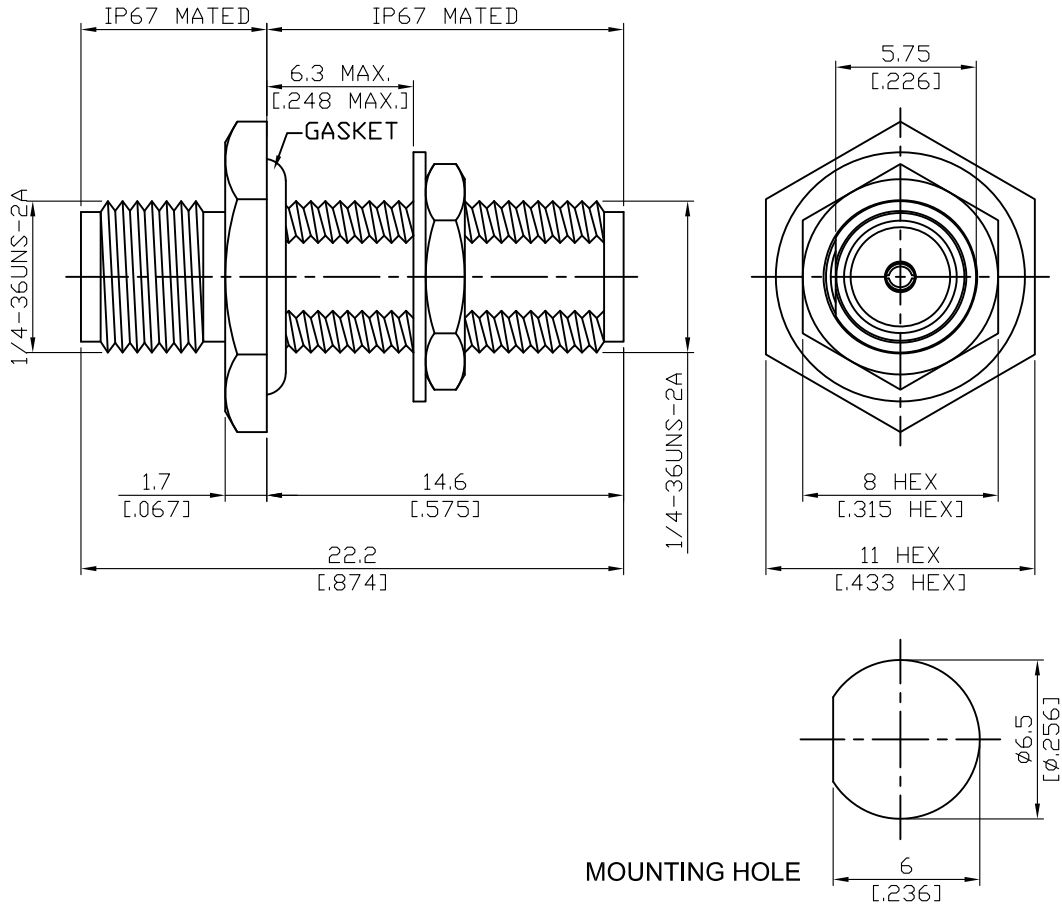


Parts	Material	Plating (Micro-inch)
Gasket	Silicone	
Hex Nut	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Lock Washer	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Insulator	Teflon	
Body	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20

Weight: 3.76 g

AD-A8A8-BF-G	SMA Jack To SMA Jack Bulkhead IP67 Mated; 18GHz VSWR 1.2																
<table border="0"> <tr> <td colspan="2" data-bbox="129 342 531 392">Interface</td> </tr> <tr> <td data-bbox="129 398 774 481">Standard Mechanically compatible with</td> <td data-bbox="774 398 1479 481">MIL-STD-348B 2.92 & 3.5</td> </tr> </table>		Interface		Standard Mechanically compatible with	MIL-STD-348B 2.92 & 3.5												
Interface																	
Standard Mechanically compatible with	MIL-STD-348B 2.92 & 3.5																
<table border="0"> <tr> <td colspan="2" data-bbox="129 602 531 651">Electrical Data</td> </tr> <tr> <td data-bbox="129 658 774 694">Impedance</td> <td data-bbox="774 658 1479 694">50Ω</td> </tr> <tr> <td data-bbox="129 703 774 739">Frequency Range</td> <td data-bbox="774 703 1479 739">DC To 18GHz</td> </tr> <tr> <td data-bbox="129 748 774 784">VSWR</td> <td data-bbox="774 748 1479 784">≤ 1.2 (DC To 18GHz)</td> </tr> <tr> <td data-bbox="129 792 774 828">Insertion Loss</td> <td data-bbox="774 792 1479 828">≤ 0.04 x √f(GHz) dB</td> </tr> <tr> <td data-bbox="129 837 774 873">Insulation Resistance</td> <td data-bbox="774 837 1479 873">≥ 5000MΩ</td> </tr> <tr> <td data-bbox="129 882 774 918">Dielectric Withstanding Voltage (at sea level)</td> <td data-bbox="774 882 1479 918">1500 V rms</td> </tr> <tr> <td data-bbox="129 927 774 963">Working Voltage (at sea level)</td> <td data-bbox="774 927 1479 963">500 V rms</td> </tr> </table>		Electrical Data		Impedance	50Ω	Frequency Range	DC To 18GHz	VSWR	≤ 1.2 (DC To 18GHz)	Insertion Loss	≤ 0.04 x √f(GHz) dB	Insulation Resistance	≥ 5000MΩ	Dielectric Withstanding Voltage (at sea level)	1500 V rms	Working Voltage (at sea level)	500 V rms
Electrical Data																	
Impedance	50Ω																
Frequency Range	DC To 18GHz																
VSWR	≤ 1.2 (DC To 18GHz)																
Insertion Loss	≤ 0.04 x √f(GHz) dB																
Insulation Resistance	≥ 5000MΩ																
Dielectric Withstanding Voltage (at sea level)	1500 V rms																
Working Voltage (at sea level)	500 V rms																
<table border="0"> <tr> <td colspan="2" data-bbox="129 1099 531 1149">Mechanical Data</td> </tr> <tr> <td data-bbox="129 1155 774 1191">Recommended Coupling Nut Torque</td> <td data-bbox="774 1155 1479 1191">4 in-lbs</td> </tr> <tr> <td data-bbox="129 1200 774 1236">Coupling Proof Torque</td> <td data-bbox="774 1200 1479 1236">5.3 in-lbs</td> </tr> <tr> <td data-bbox="129 1245 774 1281">Contact Captivation-axial</td> <td data-bbox="774 1245 1479 1281">≥ 6.1 lbs</td> </tr> <tr> <td data-bbox="129 1290 774 1326">Durability (mating)</td> <td data-bbox="774 1290 1479 1326">≥ 100</td> </tr> </table>		Mechanical Data		Recommended Coupling Nut Torque	4 in-lbs	Coupling Proof Torque	5.3 in-lbs	Contact Captivation-axial	≥ 6.1 lbs	Durability (mating)	≥ 100						
Mechanical Data																	
Recommended Coupling Nut Torque	4 in-lbs																
Coupling Proof Torque	5.3 in-lbs																
Contact Captivation-axial	≥ 6.1 lbs																
Durability (mating)	≥ 100																
<table border="0"> <tr> <td colspan="2" data-bbox="129 1503 531 1552">Environmental Data</td> </tr> <tr> <td data-bbox="129 1559 774 1594">Temperature Range</td> <td data-bbox="774 1559 1479 1594">-65°C to +165°C</td> </tr> <tr> <td data-bbox="129 1603 774 1639">Thermal Shock</td> <td data-bbox="774 1603 1479 1639">MIL-STD-202, Method 107, Condition B</td> </tr> <tr> <td data-bbox="129 1648 774 1684">Moisture Resistance</td> <td data-bbox="774 1648 1479 1684">MIL-STD-202, Method 206</td> </tr> <tr> <td data-bbox="129 1693 774 1729">Corrosion</td> <td data-bbox="774 1693 1479 1729">MIL-STD-202, Method 101, Condition B</td> </tr> <tr> <td data-bbox="129 1738 774 1774">RoHS</td> <td data-bbox="774 1738 1479 1774">Compliant</td> </tr> </table>		Environmental Data		Temperature Range	-65°C to +165°C	Thermal Shock	MIL-STD-202, Method 107, Condition B	Moisture Resistance	MIL-STD-202, Method 206	Corrosion	MIL-STD-202, Method 101, Condition B	RoHS	Compliant				
Environmental Data																	
Temperature Range	-65°C to +165°C																
Thermal Shock	MIL-STD-202, Method 107, Condition B																
Moisture Resistance	MIL-STD-202, Method 206																
Corrosion	MIL-STD-202, Method 101, Condition B																
RoHS	Compliant																

AD-A8A8-BF-G

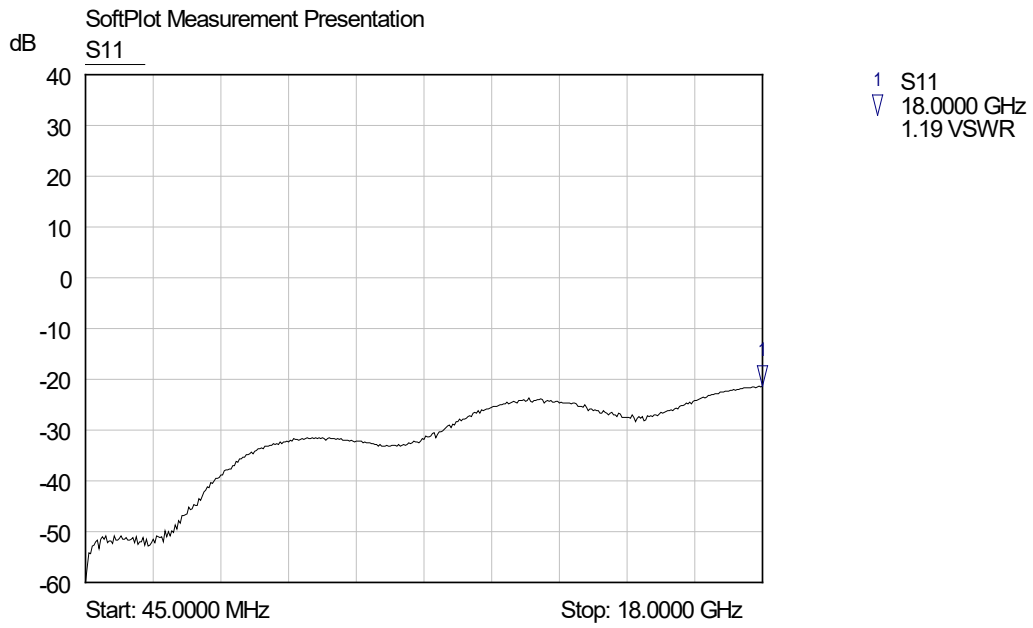

勝特力電材超市-龍山店 886-3-5773766
勝特力電材超市-光復店 886-3-5729570
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
<http://www.100y.com.tw>