


AD-N3(M16)N8

N Plug With M16 Thread To N Jack  
11GHz VSWR 1.2

50Ω

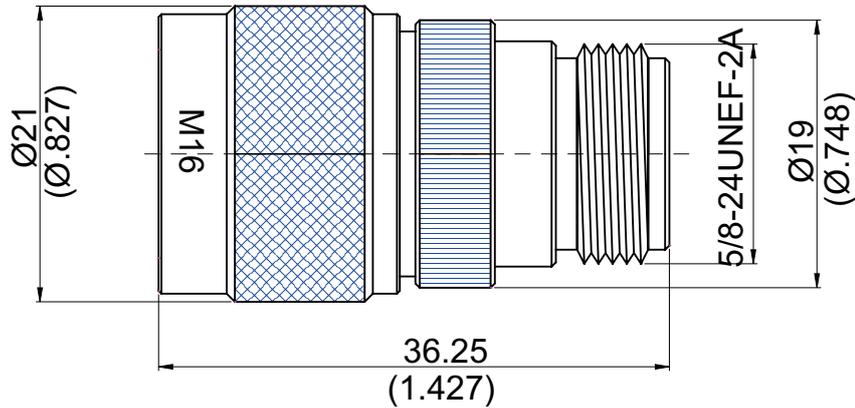

NOTE: N Plug Has M16 Thread

Parts	Material	Plating (Micro-inch)
Contact Pin(Plug)	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Retainer Ring	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Gasket	Silicon	
Contact Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Contact Pin(Jack)	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Insulator	Teflon	
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Coupling Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50

Weight: 52.62 g

AD-N3(M16)N8	N Plug With M16 Thread To N Jack 11GHz VSWR 1.2																
<table border="0"> <tr> <td data-bbox="129 344 531 394"><b>Interface</b></td> <td></td> </tr> <tr> <td data-bbox="129 394 531 584">Standard</td> <td data-bbox="531 394 1481 584">MIL-STD-348B</td> </tr> </table>		<b>Interface</b>		Standard	MIL-STD-348B												
<b>Interface</b>																	
Standard	MIL-STD-348B																
<table border="0"> <tr> <td data-bbox="129 607 531 656"><b>Electrical Data</b></td> <td></td> </tr> <tr> <td data-bbox="129 656 531 705">Impedance</td> <td data-bbox="531 656 1481 705">50Ω</td> </tr> <tr> <td data-bbox="129 705 531 754">Frequency Range</td> <td data-bbox="531 705 1481 754">DC to 11GHz</td> </tr> <tr> <td data-bbox="129 754 531 804">VSWR</td> <td data-bbox="531 754 1481 804">≤ 1.2 (DC To 11GHz)</td> </tr> <tr> <td data-bbox="129 804 531 853">Insertion Loss</td> <td data-bbox="531 804 1481 853">≤ 0.05 x √f(GHz) dB</td> </tr> <tr> <td data-bbox="129 853 531 902">Insulation Resistance</td> <td data-bbox="531 853 1481 902">≥ 5000MΩ</td> </tr> <tr> <td data-bbox="129 902 531 952">Dielectric Withstanding Voltage (at sea level)</td> <td data-bbox="531 902 1481 952">2500 V rms</td> </tr> <tr> <td data-bbox="129 952 531 1001">Working Voltage (at sea level)</td> <td data-bbox="531 952 1481 1001">1000 V rms</td> </tr> </table>		<b>Electrical Data</b>		Impedance	50Ω	Frequency Range	DC to 11GHz	VSWR	≤ 1.2 (DC To 11GHz)	Insertion Loss	≤ 0.05 x √f(GHz) dB	Insulation Resistance	≥ 5000MΩ	Dielectric Withstanding Voltage (at sea level)	2500 V rms	Working Voltage (at sea level)	1000 V rms
<b>Electrical Data</b>																	
Impedance	50Ω																
Frequency Range	DC to 11GHz																
VSWR	≤ 1.2 (DC To 11GHz)																
Insertion Loss	≤ 0.05 x √f(GHz) dB																
Insulation Resistance	≥ 5000MΩ																
Dielectric Withstanding Voltage (at sea level)	2500 V rms																
Working Voltage (at sea level)	1000 V rms																
<table border="0"> <tr> <td data-bbox="129 1106 531 1155"><b>Mechanical Data</b></td> <td></td> </tr> <tr> <td data-bbox="129 1155 531 1205">Recommended Coupling Nut Torque</td> <td data-bbox="531 1155 1481 1205">6 to 10 in-lbs</td> </tr> <tr> <td data-bbox="129 1205 531 1254">Coupling Proof Torque</td> <td data-bbox="531 1205 1481 1254">15 in-lbs</td> </tr> <tr> <td data-bbox="129 1254 531 1303">Coupling Nut Retention Force</td> <td data-bbox="531 1254 1481 1303">≥ 101.2 lbs</td> </tr> <tr> <td data-bbox="129 1303 531 1352">Contact Captivation-axial</td> <td data-bbox="531 1303 1481 1352">≥ 6.3 lbs</td> </tr> <tr> <td data-bbox="129 1352 531 1402">Durability (mating)</td> <td data-bbox="531 1352 1481 1402">≥ 500</td> </tr> </table>		<b>Mechanical Data</b>		Recommended Coupling Nut Torque	6 to 10 in-lbs	Coupling Proof Torque	15 in-lbs	Coupling Nut Retention Force	≥ 101.2 lbs	Contact Captivation-axial	≥ 6.3 lbs	Durability (mating)	≥ 500				
<b>Mechanical Data</b>																	
Recommended Coupling Nut Torque	6 to 10 in-lbs																
Coupling Proof Torque	15 in-lbs																
Coupling Nut Retention Force	≥ 101.2 lbs																
Contact Captivation-axial	≥ 6.3 lbs																
Durability (mating)	≥ 500																
<table border="0"> <tr> <td data-bbox="129 1507 531 1556"><b>Environmental Data</b></td> <td></td> </tr> <tr> <td data-bbox="129 1556 531 1606">Temperature Range</td> <td data-bbox="531 1556 1481 1606">-65°C to +165°C</td> </tr> <tr> <td data-bbox="129 1606 531 1655">Thermal Shock</td> <td data-bbox="531 1606 1481 1655">MIL-STD-202, Method 107, Condition B</td> </tr> <tr> <td data-bbox="129 1655 531 1704">Moisture Resistance</td> <td data-bbox="531 1655 1481 1704">MIL-STD-202, Method 206</td> </tr> <tr> <td data-bbox="129 1704 531 1753">Corrosion</td> <td data-bbox="531 1704 1481 1753">MIL-STD-202, Method 101, Condition B</td> </tr> <tr> <td data-bbox="129 1753 531 1803">RoHS</td> <td data-bbox="531 1753 1481 1803">Compliant</td> </tr> </table>		<b>Environmental Data</b>		Temperature Range	-65°C to +165°C	Thermal Shock	MIL-STD-202, Method 107, Condition B	Moisture Resistance	MIL-STD-202, Method 206	Corrosion	MIL-STD-202, Method 101, Condition B	RoHS	Compliant				
<b>Environmental Data</b>																	
Temperature Range	-65°C to +165°C																
Thermal Shock	MIL-STD-202, Method 107, Condition B																
Moisture Resistance	MIL-STD-202, Method 206																
Corrosion	MIL-STD-202, Method 101, Condition B																
RoHS	Compliant																