


ADS-A8K3-27-1.2

SMA Jack To K Plug
27GHz VSWR 1.2

50Ω

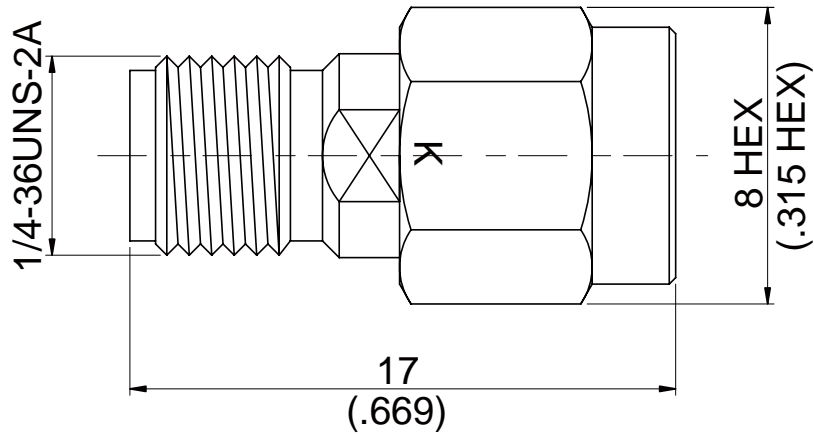

Parts	Material	Plating (Micro-inch)
Retainer Ring	Beryllium Copper	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Gasket	Silicon	
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Insulator	PTFE& PPO	
Body	Stainless Steel	Passivated
Coupling Nut	Stainless Steel	Passivated

Weight: 3.33 g

This part number complies with RoHS.

Notice: JYBAO reserves the right to make modifications deemed appropriate.

ADS-A8K3-27-1.2	SMA Jack To K Plug 27GHz VSWR 1.2																
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Interface</div> Standard Mechanically compatible with	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%;"></th> <th style="width: 50%;">2.92</th> </tr> </thead> <tbody> <tr> <td>Standard</td> <td>MIL-STD-348B</td> </tr> <tr> <td>Mechanically compatible with</td> <td>3.5 & SMA</td> </tr> </tbody> </table>		2.92	Standard	MIL-STD-348B	Mechanically compatible with	3.5 & SMA	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%;"></th> <th style="width: 50%;">SMA</th> </tr> </thead> <tbody> <tr> <td>Standard</td> <td>MIL-STD-348B</td> </tr> <tr> <td>Mechanically compatible with</td> <td>2.92 & 3.5</td> </tr> </tbody> </table>		SMA	Standard	MIL-STD-348B	Mechanically compatible with	2.92 & 3.5			
	2.92																
Standard	MIL-STD-348B																
Mechanically compatible with	3.5 & SMA																
	SMA																
Standard	MIL-STD-348B																
Mechanically compatible with	2.92 & 3.5																
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Electrical Data</div> Impedance Frequency Range VSWR Insertion Loss Insulation Resistance Dielectric Withstanding Voltage (at sea level) Working Voltage (at sea level)	<table style="width: 100%;"> <tbody> <tr> <td style="width: 50%;">Impedance</td> <td style="width: 50%;">50Ω</td> </tr> <tr> <td>Frequency Range</td> <td>DC To 27GHz</td> </tr> <tr> <td>VSWR</td> <td>≤ 1.2 (DC To 27GHz)</td> </tr> <tr> <td>Insertion Loss</td> <td>≤ 0.05 x √f(GHz) dB</td> </tr> <tr> <td>Insulation Resistance</td> <td>≥ 5000MΩ</td> </tr> <tr> <td>Dielectric Withstanding Voltage (at sea level)</td> <td>750 V rms</td> </tr> <tr> <td>Working Voltage (at sea level)</td> <td>250 V rms</td> </tr> </tbody> </table>		Impedance	50Ω	Frequency Range	DC To 27GHz	VSWR	≤ 1.2 (DC To 27GHz)	Insertion Loss	≤ 0.05 x √f(GHz) dB	Insulation Resistance	≥ 5000MΩ	Dielectric Withstanding Voltage (at sea level)	750 V rms	Working Voltage (at sea level)	250 V rms	
Impedance	50Ω																
Frequency Range	DC To 27GHz																
VSWR	≤ 1.2 (DC To 27GHz)																
Insertion Loss	≤ 0.05 x √f(GHz) dB																
Insulation Resistance	≥ 5000MΩ																
Dielectric Withstanding Voltage (at sea level)	750 V rms																
Working Voltage (at sea level)	250 V rms																
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Mechanical Data</div> Recommended Coupling Nut Torque Coupling Proof Torque Contact Captivation-axial Durability (mating)	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%;"></th> <th style="width: 50%;">2.92</th> <th style="width: 50%;">SMA</th> </tr> </thead> <tbody> <tr> <td>Recommended Coupling Nut Torque</td> <td>11.47 in-lbs</td> <td>7 to 9.5 in-lbs</td> </tr> <tr> <td>Coupling Proof Torque</td> <td>15 in-lbs</td> <td>15 in-lbs</td> </tr> <tr> <td>Contact Captivation-axial</td> <td>≥ 4.9 lbs</td> <td>≥ 6.1 lbs</td> </tr> <tr> <td>Durability (mating)</td> <td>≥ 500</td> <td>≥ 500</td> </tr> </tbody> </table>			2.92	SMA	Recommended Coupling Nut Torque	11.47 in-lbs	7 to 9.5 in-lbs	Coupling Proof Torque	15 in-lbs	15 in-lbs	Contact Captivation-axial	≥ 4.9 lbs	≥ 6.1 lbs	Durability (mating)	≥ 500	≥ 500
	2.92	SMA															
Recommended Coupling Nut Torque	11.47 in-lbs	7 to 9.5 in-lbs															
Coupling Proof Torque	15 in-lbs	15 in-lbs															
Contact Captivation-axial	≥ 4.9 lbs	≥ 6.1 lbs															
Durability (mating)	≥ 500	≥ 500															
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Environmental Data</div> Temperature Range Thermal Shock Moisture Resistance Corrosion RoHS	<table style="width: 100%;"> <tbody> <tr> <td style="width: 50%;">Temperature Range</td> <td style="width: 50%;">-55°C to +105°C</td> </tr> <tr> <td>Thermal Shock</td> <td>MIL-STD-202, Method 107, Condition B</td> </tr> <tr> <td>Moisture Resistance</td> <td>MIL-STD-202, Method 206</td> </tr> <tr> <td>Corrosion</td> <td>MIL-STD-202, Method 101, Condition B</td> </tr> <tr> <td>RoHS</td> <td>Compliant</td> </tr> </tbody> </table>		Temperature Range	-55°C to +105°C	Thermal Shock	MIL-STD-202, Method 107, Condition B	Moisture Resistance	MIL-STD-202, Method 206	Corrosion	MIL-STD-202, Method 101, Condition B	RoHS	Compliant					
Temperature Range	-55°C to +105°C																
Thermal Shock	MIL-STD-202, Method 107, Condition B																
Moisture Resistance	MIL-STD-202, Method 206																
Corrosion	MIL-STD-202, Method 101, Condition B																
RoHS	Compliant																

ADS-A8K3-27-1.2

