


Current Transducer HXN 03 .. 50-P

For the electronic measurement of currents: DC, AC, pulsed..., with galvanic separation between the primary and the secondary circuit.

$$I_{PN} = 3 \dots 50 \text{ A}$$



RoHS

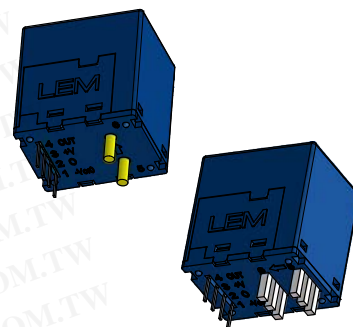

Electrical data

Type	Primary nominal current rms I_{PN} (A)	Primary current, measuring range I_{PM} (A)	Primary conductor diameter x turns (mm)
HXN 03-P	3	± 9	0.6 d x 20 T
HXN 05-P	5	± 15	0.8 d x 12 T
HXN 10-P	10	± 30	1.1 d x 6 T
HXN 15-P	15	± 45	1.4 d x 4 T
HXN 20-P	20	± 60	1.6 d x 3 T
HXN 25-P	25	± 75	1.6 d x 2 T
HXN 30-P	30	± 75	1.6 d x 2 T
HXN 50-P	50	± 150	1.2 x 6.3 x 1 T

V_{out}	Output voltage (Analog) @ $\pm I_{PN}$, $R_L = 10 \text{ k}\Omega$, $T_A = 25^\circ\text{C}$	± 4	V
R_L	Load resistance	≥ 10	k Ω
R_{out}	Output internal resistance	< 50	Ω
U_C	Supply voltage ($\pm 5\%$) ¹⁾	± 15	V
I_C	Current consumption	$< \pm 15$	mA

Features

- Hall effect measuring principle
- Insulating plastic case recognized according to UL 94-V0.

Advantages

- Low insertion losses
- Low power consumption
- Easy to mount with automatic handling system
- Small size and space saving
- Only one design for wide current ratings range
- High immunity to external interference.

Applications

- AC variable speed drives
- DC motor drives
- Battery supplied applications
- Uninterruptible Power Supplies (UPS)
- Switched Mode Power Supplies (SMPS)
- Electrical appliances.

Application domain

- Industrial.

Accuracy - Dynamic performance data

X	Accuracy @ I_{PN} , $T_A = 25^\circ\text{C}$ (excluding offset)	$< \pm 1$	% of I_{PN}
ϵ_L	Linearity error ($0 \dots \pm I_{PN}$)	$< \pm 1$	% of I_{PN}
V_{OE}	Electrical offset voltage @ $T_A = 25^\circ\text{C}$	$< \pm 40$	mV
V_{OH}	Hysteresis offset voltage @ $I_P = 0$, after an excursion of $1 \times I_{PN}$	$\leq \pm 15$	mV
TCV_{OE}	Temperature coefficient of V_{OE}	$< \pm 1.5$	mV/K
TCV_{out}	Temperature coefficient of V_{out} (% of reading)	± 0.1	%/K
t_r	Step response time to 90 % of I_{PN}	≤ 3	μs
BW	Frequency bandwidth (-3 dB) ²⁾	50	kHz

General data

T_A	Ambient operating temperature	-25 .. +85	$^\circ\text{C}$
T_S	Ambient storage temperature	-25 .. +85	$^\circ\text{C}$
m	Mass	8	g
	Standard	EN 50178: 1997	

Notes: ¹⁾ Also operate at $U_C = \pm 12 \text{ V}$, with measuring range reduced to $\pm 2.5 \times I_{PN}$

²⁾ Small signal only to avoid excessive heating of the magnetic cores.

N°70.A9.06.000.0, N°70.A9.08.000.0, N°70.A9.13.000.0, N°70.A9.15.000.0

N°70.A9.17.000.0, N°70.A9.19.000.0, N°70.A9.20.000.0, N°70.A9.25.000.0

29March2013/version 1

LEM reserves the right to carry out modifications on its transducers, in order to improve them, without prior notice

Page 1/3

www.lem.com

Current Transducer HXN 03 .. 50-P

Isolation characteristics

U_d	Rms voltage for AC insulation test, 50 Hz, 1 min	> 3	kV
\hat{U}_w	Impulse withstand voltage 1.2/50 μ s	≥ 6	kV
U_e	Partial discharge extinction voltage rms @ 10 pC	≥ 1	kV
d_{cp}	Creepage distance	Min	mm
d_{cl}	Clearance	5.5	mm
CTI	Comparative Tracking Index (group I)	600	

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Applications examples

According to EN 50178 and IEC 61010-1 standards and following conditions:

- Over voltage category OV 3
- Pollution degree PD2
- Non-uniform field

	EN 50178	IEC 61010-1
$d_{cp}, d_{cl}, \hat{U}_w$	Rated insulation voltage	Nominal voltage
Basic insulation	600 V	600 V
Reinforced insulation	300 V	150 V

Safety

This transducer must be used in limited-energy secondary circuits according to IEC 61010-1.



This transducer must be used in electric/electronic equipment with respect to applicable standards and safety requirements in accordance with the manufacturer's operating instructions.



Caution, risk of electrical shock

When operating the transducer, certain parts of the module can carry hazardous voltage (eg. primary busbar, power supply).


Ignoring this warning can lead to injury and/or cause serious damage.

This transducer is a build-in device, whose conducting parts must be inaccessible after installation.

A protective housing or additional shield could be used.

Main supply must be able to be disconnected.

Dimensions HXN 03 .. 50-P (in mm)

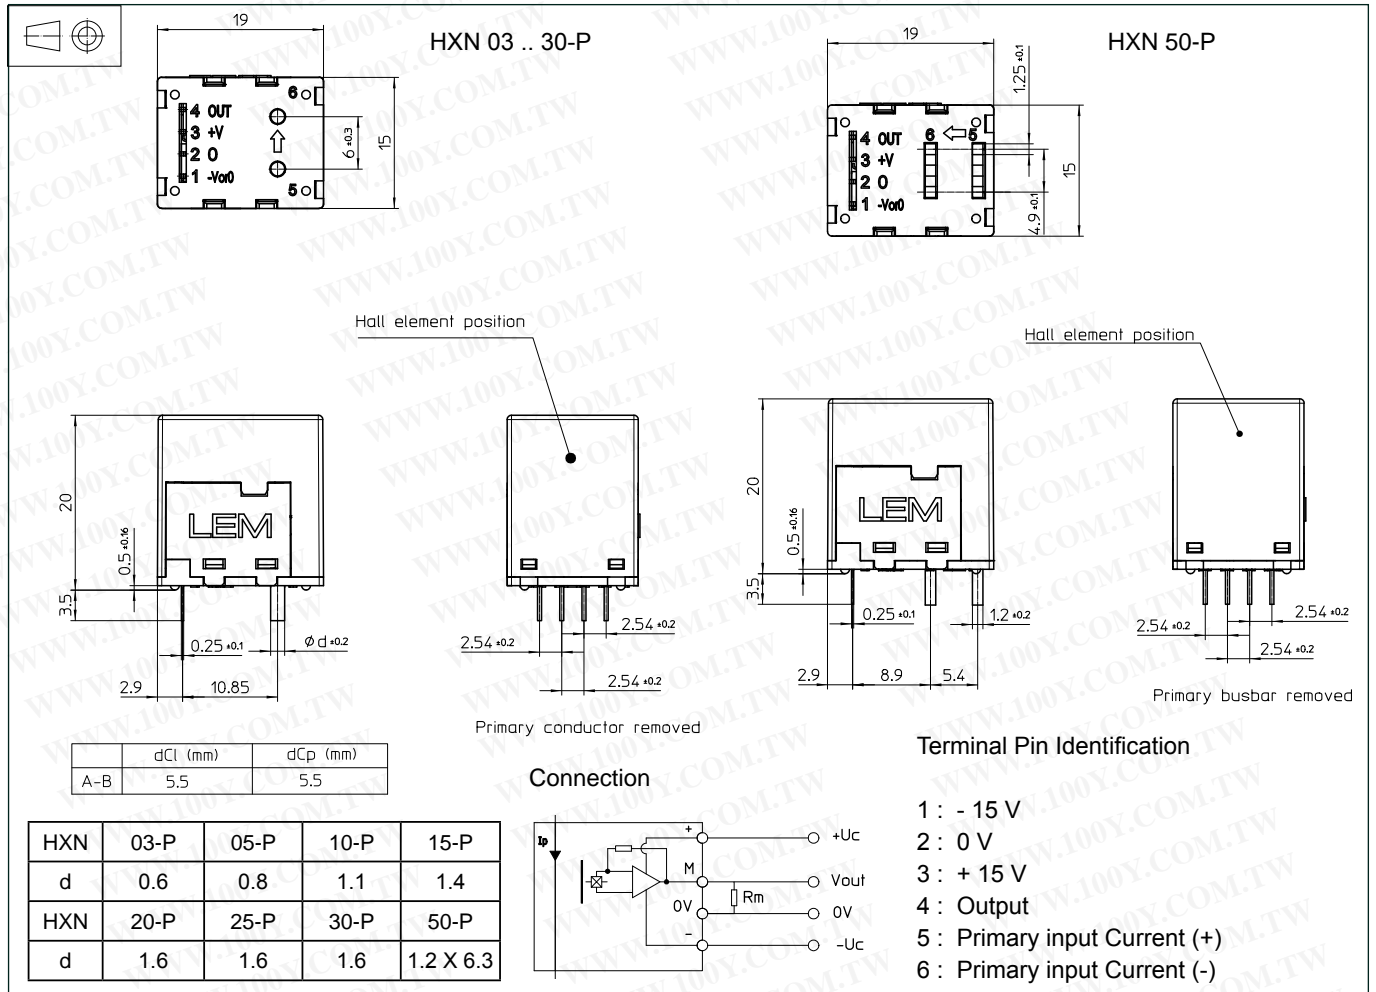

Mechanical characteristics

- General tolerance ± 0.5 mm
- Connection of secondary 4 pins
- 0.5 x 0.25 mm

Remarks

- V_{out} is positive when I_p flows in the direction of the arrow.
- Temperature of the primary busbar should not exceed 100 °C.
- This is a standard model. For different versions (supply voltages, turns ratios, unidirectional measurements...), please contact us.

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)