


ADS-N8N8-BF-18-1.15

Stainless N Jack To N Jack Bulkhead
 IP67 Mated, 18GHz VSWR 1.15

50Ω

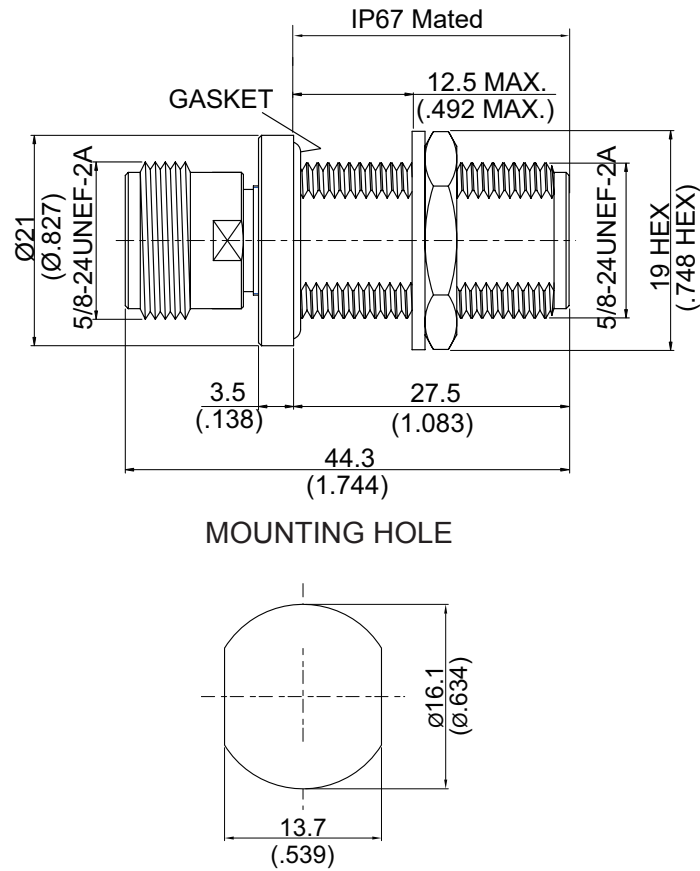


Parts	Material	Plating (Micro-inch)
Hex Nut	Stainless Steel	Passivated
Lock Washer	Stainless Steel	Passivated
Gasket	Silicon	
Insulator	PTFE	
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Body	Stainless Steel	Passivated

Weight:

ADS-N8N8-BF-18-1.15	Stainless N Jack To N Jack Bulkhead IP67 Mated, 18GHz VSWR 1.15
Interface	
Standard	MIL-STD-348B
Electrical Data	
Impedance	50Ω
Frequency Range	DC to 18GHz
VSWR	≤ 1.15 (DC To 18GHz)
Insertion Loss	≤ 0.05 x √f(GHz) dB
Insulation Resistance	≥ 5000MΩ
Dielectric Withstanding Voltage (at sea level)	2500 V rms
Working Voltage (at sea level)	1000 V rms
Mechanical Data	
Recommended Coupling Nut Torque	6 to 10 in-lbs
Coupling Proof Torque	15 in-lbs
Contact Captivation-axial	≥ 6.3 lbs
Durability (mating)	≥ 500
Environmental Data	
Temperature Range	-65°C to +165°C
Thermal Shock	MIL-STD-202, Method 107, Condition B
Moisture Resistance	MIL-STD-202, Method 206
Corrosion	MIL-STD-202, Method 101, Condition B
RoHS	Compliant

ADS-N8N8-BF-18-1.15

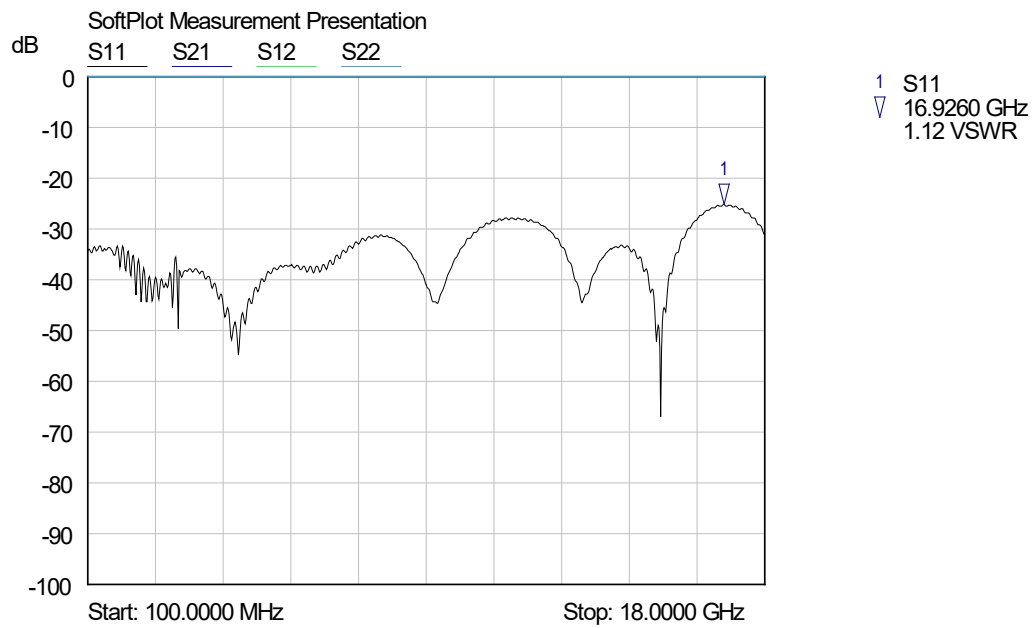

勝特力電材超市-龍山店 886-3-5773766
勝特力電材超市-光復店 886-3-5729570
勝特力電子(上海) 86-21-34970699
勝特力電子(深圳) 86-755-83298787
<http://www.100y.com.tw>