

# Current Transducer HAW 03 .. 20-P $I_{PN} = 3 .. 20 A$

For the electronic measurement of currents: DC, AC, pulsed, mixed, with a galvanic isolation between the primary circuit (high power) and the secondary circuit (electronic circuit).

## Preliminary



### Electrical data

	Primary nominal r.m.s. current $I_{PN}$ (A)	Primary current measuring range $I_p$ (A)	Primary Conductor Diameter (mm)	Type
3	$\pm 7.5$	0.8		HAW 03-P
5	$\pm 13$	0.9		HAW 05-P
7.5	$\pm 19$	1.0		HAW 7.5-P
10	$\pm 25$	1.1		HAW 10-P
15	$\pm 38$	1.4		HAW 15-P
20	$\pm 50$	1.6		HAW 20-P

$V_c$	Supply voltage ( $\pm 5\%$ )	$\pm 15$	V
$I_c$	Current consumption	$<\pm 18$	mA
$V_d$	R.m.s. voltage for AC isolation test, 50/60Hz, 1 mn	2.0	kV
$R_{IS}$	Isolation resistance @ 500 VDC	$> 500$	M $\Omega$
$V_{OUT}$	Output voltage @ $\pm I_{PN}$ , $R_L = 10 \text{ k}\Omega$ , $T_A = 25^\circ\text{C}$	$\pm 4$	V
$R_{OUT}$	Output internal resistance	100	$\Omega$
$R_L$	Load resistance	$> 10$	k $\Omega$

### Accuracy-Dynamic performance data

$X_{\bullet L}$	Accuracy @ $I_{PN}$ , $T_A = 25^\circ\text{C}$ (without offset)	$< \pm 1$	% of $I_{PN}$
$V_{OE}$	Linearity ( $0 .. \pm I_{PN}$ )	$< \pm 1$	% of $I_{PN}$
$V_{OH}$	Electrical offset voltage, $T_A = 25^\circ\text{C}$	$< \pm 40$	mV
$V_{OT}$	Hysteresis offset voltage @ $I_p = 0$ ; after an excursion of $1 \times I_{PN}$	$< \pm 20$	mV
$TCE_G$	Thermal drift of $V_{OE}$	max.	$\pm 1.5$
$t_r$	Thermal drift of the gain (% of reading)		$\pm 0.1$
	Response time @ 90% of $I_p$		$< 3$
			$\mu\text{s}$

### General data

$T_A$	Ambient operating temperature	-10 .. +75	°C
$T_S$	Ambient storage temperature	-15 .. +85	°C
$m$	Mass	12	g

Notes : EN 50178 approval pending

### Features

- Hall effect measuring principle
- Galvanic isolation between primary and secondary circuit
- Isolation voltage 2000 V
- Low power consumption
- Extended measuring range( $2.5 \times I_{PN}$ )

### Advantages

- Easy mounting
- Small size and space saving
- Only one design for wide current ratings range
- High immunity to external interference.

### Applications

- DC motor drives
- Switched Mode Power Supplies (SMPS)
- AC variable speed drives
- Uninterruptible Power Supplies (UPS)
- Battery supplied applications
- Inverters


勝特力材料 886-3-5753170  
 胜特力电子(上海) 86-21-54151736  
 胜特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)


**LEM**

## HAW 03 .. 20-P


**Front View**

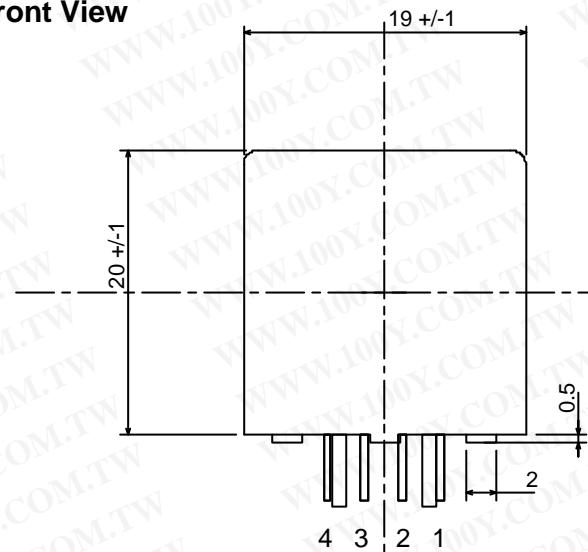

**Right View**

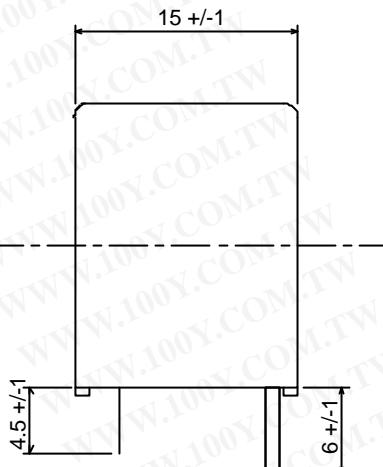

**Bottom View**

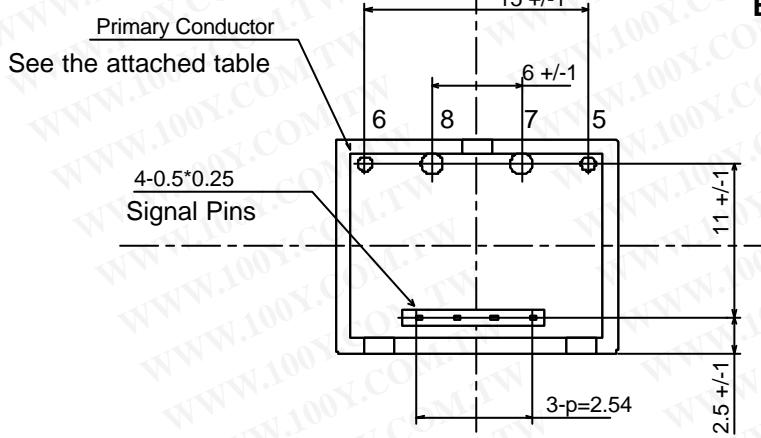

### Terminal Pin Identification

#### Primary Conductor

Part No.	Pin No.	Diameter
HAW 03-P	5-6	0.8 d
HAW 05-P	5-6	0.9 d
HAW 10-P	7-8	1.1 d
HAW 15-P	7-8	1.4 d
HAW 20-P	7-8	1.6 d

#### Signal Pins

1	-Vcc
2	0V
3	+Vcc
4	Output

#### Direction of Current Flow

5 (+) → 6 (-)  
 7 (+) → 8 (-)

UNIT : mm