

射頻連接器 BNC/MMCX-JK BNC 公轉 MMCX 母 MMCX/BNC-KJ
 射頻連接器 BNC/MMCX-JJ BNC 公轉 MMCX 公 MMCX/BNC-JJ
 射頻連接器 BNC/MMCX-KJ BNC 母轉 MMCX 公 MMCX/BNC-JK
 射頻連接器 BNC/MMCX-KK BNC 母轉 MMCX 母 MMCX/BNC-KK
 射頻連接器 BNC/MCX-JJ BNC 公轉 MCX 公 MCX/BNC-JJ
 射頻轉接器 TNC/BNC-JK Q9/TNC-KJ TNC 公頭轉 BNC 母頭
 射頻轉接器 TNC/BNC-KK Q9 轉接頭 TNC 母頭轉 BNC 母頭
 射頻轉接器 TNC/BNC-JJ BNC/TNC-JJ TNC 公轉 BNC 公
 射頻轉接器 TNC/BNC-KJ TNC 母頭轉 BNC 公頭 BNC/TNC-JK
 射頻轉接器 BNC/SMB-KJ BNC 母轉 SMB 公 SMB/BNC-JK
 射頻轉接器 BNC/SMB-KK BNC 母轉 SMB 母 SMB/BNC-KK
 射頻轉接器 BNC-KJK BNC 三通頭 BNC-JKK 轉接頭 一公兩母
 射頻轉接器 BNC-KKK BNC/Q9 三通頭 BNC 三母頭

BNC-MMCX-JK

- 1 BNC公頭
- 2 MMCX母頭

BNC/MCX-JJ

- 1 BNC公頭
- 2 MCX公頭



TNC/BNC-JK

- 1 TNC公頭
- 2 BNC母頭

TNC/BNC-KJ

- 1 TNC母頭
- 2 BNC公頭

BNC-MMCX-JJ

- 1 BNC公頭
- 2 MMCX公頭



BNC/SMB-KJ

- 1 BNC母头
- 2 SMB公头



BNC-KKK(三通)

- 1 BNC母头
- 2 BNC母头
- 3 BNC母头



BNC-MMCX-KJ

- 1 BNC母头
- 2 MMCX公头



TNC/BNC-KK

- 1 TNC母头
- 2 BNC母头



BNC/MMCX-KK

- 1 BNC母头
- 2 MMCX母头

BNC/SMB-KK

- 1 BNC母头
- 2 SMB母头



TNC/BNC-JJ

- 1 TNC公头
- 2 BNC公头



BNC-KJK三通

- 1 BNC母头
- 2 BNC公头
- 3 BNC母头



产品规格书

PRODUCT SPECIFICATION

This document contains proprietary information and such information may not be disclosed to others for any purposes,
本文件包含专有信息，不得出于任何目的向他人披露此类信息。
not used for sales/marketing/procurement purposes without written permission.
未经书面许可，不得用于销售/营销/采购目的。

1. Electrical/电气


- | | |
|---|------------|
| 1.1 Impedance /阻抗 | 50Ω |
| 1.2 Frequency /频率 | DC-4GHz |
| 1.3 Dielectric withstanding voltage /介质耐压 | 1500V(rms) |
| 1.4 Center contact resistance /中心接触电阻 | ≤1.5mΩ |
| 1.5 Outer contact resistance /外部接触电阻 | ≤1mΩ |
| 1.6 Insulation resistance /绝缘电阻 | ≥5000MΩ |

2. Environmental & Mechanical/环境与机械

- | | |
|-----------------------------|------------|
| 2.1 Temperature range /温度范围 | -45°~+125° |
| 2.2 RoHS Compliant /符合RoHS | |
| 2.3 Durability /耐久性 | 500cycles |

3. Material and Plating/材料和电镀

- | | |
|--|--|
| 3.1 Inner Contact /内导体: Phosphorus-Copper Gold Plating /磷铜镀金 | |
| 3.2 Outer Contact /外导体: Brass, nickel plated /黄铜镀镍 | |
| 3.3 Insulators /绝缘体: PTFE /聚四氟乙烯 | |

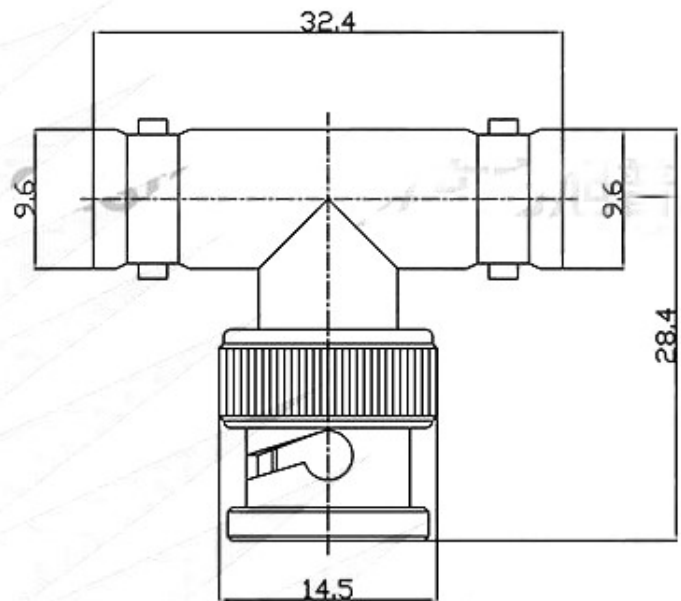


产品型号P/N: BNC-KJK

产品规格书

PRODUCT SPECIFICATION

This document contains proprietary information and such information may not be disclosed to others for any purposes,
本文件包含专有信息，不得出于任何目的向他人披露此类信息。
not used for sales/marketing/procurement purposes without written permission.
未经书面许可，不得用于销售/营销/采购目的。

1. Electrical/电气
 - 1.1 Impedance /阻抗 50Ω
 - 1.2 Frequency /频率 DC-4GHz
 - 1.3 VSWR/驻波 ≤ 1.25
 - 1.4 Dielectric withstanding voltage /介质耐压 1500V(rms)
 - 1.5 Center contact resistance /中心接触电阻 $\leq 1.5\text{m}\Omega$
 - 1.6 Outer contact resistance /外部接触电阻 $\leq 0.2\text{m}\Omega$
 - 1.7 Insulation resistance /绝缘电阻 $\geq 5000\text{M}\Omega$
- 2 Environmental & Mechanical /环境与机械
 - 2.1 Temperature range /温度范围 $-45^{\circ}\sim+125^{\circ}$
 - 2.2 RoHS Compliant /符合RoHS
 - 2.3 Durability /耐久性 500cycles
- 3 Material and Plating /材料和电镀
 - 3.1 Inner Contact /内导体: Brass, Gold plated /黄铜镀金
 - 3.2 Outer Contact /外导体: Brass, nickel plated /黄铜镀镍
 - 3.3 Insulators /绝缘体: PTFE /聚四氟乙烯

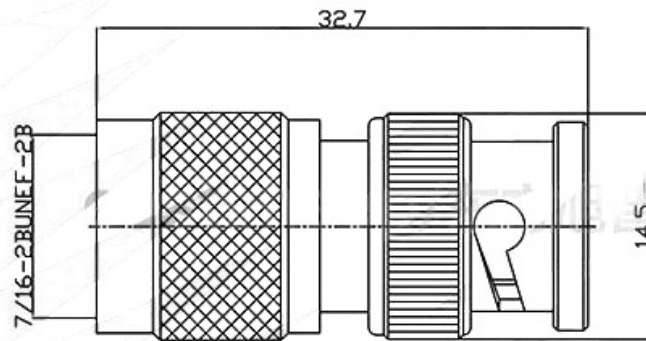

产品型号P/N: TNC/BNC-JJ

产品规格书

PRODUCT SPECIFICATION

This document contains proprietary information and such information may not be disclosed to others for any purposes,
本文件包含专有信息，不得出于任何目的向他人披露此类信息。
not used for sales/marketing/procurement purposes without written permission.
未经书面许可，不得用于销售/营销/采购目的。

1. Electrical/电气

1.1 Impedance /阻抗

50Ω

1.2 Frequency /频率

DC-4GHz

1.3 VSWR/驻波

≤1.3

1.4 Dielectric withstanding voltage /介质耐压

500V(rms)

1.5 Center contact resistance /BNC中心接触电阻

≤1.5mΩ

1.6 Outer contact resistance/BNC外部接触电阻

≤1mΩ

1.7 Center contact resistance /MMCX中心接触电阻

≤10mΩ

1.8 Outer contact resistance/MMCX外部接触电阻

≤5mΩ

1.9 Insulation resistance/绝缘电阻

≥1000MΩ

2 Environmenta & Mechanical/环境与机械

2.1 Temperature range/温度范围

-45°~+125°

2.2 Rohs Compliant/符合RoHS

2.3 Durability/耐久性

500cycles


3 Material and Plating/材料和电镀

3.1 Inner Contact/内导体: Phosphorus-Copper Gold Plating/磷铜镀金

3.2 Outer Contact/外导体: Brass, nickel plated/黄铜镀镍

3.3 Outer Contact/MMCX外导体: Brass, Gold plated/黄铜镀金

3.4 Insulators/绝缘体: PTFE/聚四氟乙烯

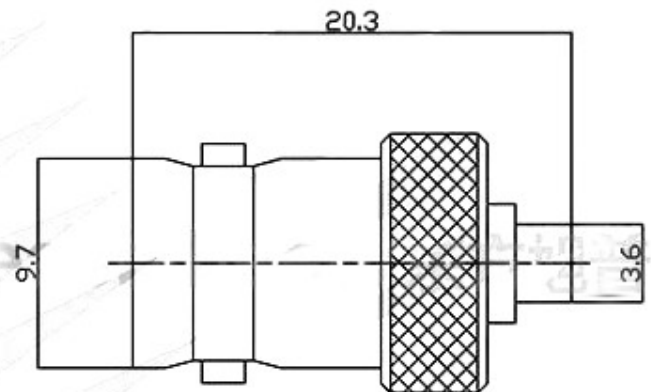

产品型号P/N: BNC/MMCX-KK

产品规格书

PRODUCT SPECIFICATION

This document contains proprietary information and such information may not be disclosed to others for any purposes,
本文件包含专有信息，不得出于任何目的向他人披露此类信息。
not used for sales/marketing/procurement purposes without written permission.
未经书面许可，不得用于销售/营销/采购目的。

1..Electrical/电气

1.1 Impedance /阻抗

1.2 Frequency /频率

1.3 VSWR/驻波

1.4 Dielectric withstanding voltage /介质耐压

1.5 Center contact resistance /BNC中心接触电阻

1.6 Outer contact resistance/BNC外部接触电阻

1.7 Center contact resistance /SMB中心接触电阻

1.8 Outer contact resistance/SMB外部接触电阻

1.9 Insulation resistance/绝缘电阻

50Ω

DC-4GHz

≤1.3

500V(rms)


≤1.5mΩ

≤1mΩ

≤6mΩ

≤1mΩ

≥1000MΩ

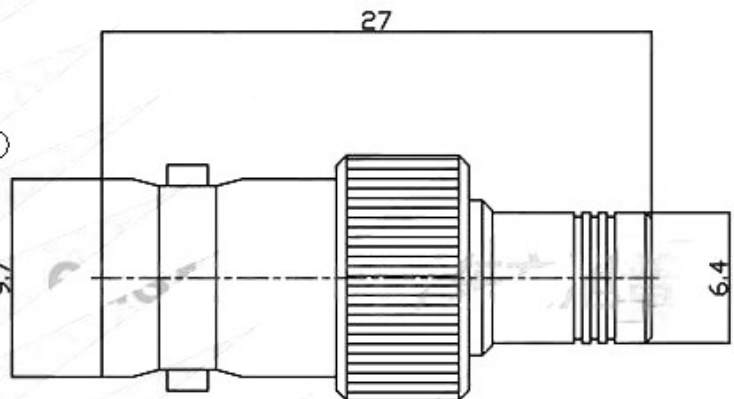

2 Environmenta &Mechanical/环境与机械

2.1 Temperture range/温度范围

-45°~+125°

2.2 Rohs Compliant/符合RoHS

2.3 Durability/耐久性

500cycles

3 Material and Plating/材料和电镀

3.1 Inner Contact/内导体: Phosphorus-Copper Gold Plating/磷铜镀金

3.2 Outer Contact/外导体: Brass, nickel plated/黄铜镀镍

3.3 Outer Contact/SMB外导体: Brass, Gold plated/黄铜镀金

3.4 Insulators/绝缘体: PTFE/聚四氟乙烯

产品型号P/N: BNC/SMB-KK

产品规格书

PRODUCT SPECIFICATION

This document contains proprietary information and such information may not be disclosed to others for any purposes,
本文件包含专有信息，不得出于任何目的向他人披露此类信息。
not used for sales/marketing/procurement purposes without written permission.
未经书面许可，不得用于销售/营销/采购目的。

1. Electrical/电气


- | | |
|---|------------|
| 1.1 Impedance /阻抗 | 50Ω |
| 1.2 Frequency /频率 | DC-4GHz |
| 1.3 VSWR/驻波 | ≤1.25 |
| 1.4 Dielectric withstanding voltage /介质耐压 | 1500V(rms) |
| 1.5 Center contact resistance /中心接触电阻 | ≤1.5mΩ |
| 1.6 Outer contact resistance /外部接触电阻 | ≤0.2mΩ |
| 1.7 Insulation resistance /绝缘电阻 | ≥5000MΩ |

2. Environmental & Mechanical/环境与机械

- | | |
|-----------------------------|------------|
| 2.1 Temperature range /温度范围 | -45°~+125° |
| 2.2 RoHS Compliant /符合RoHS | |
| 2.3 Durability /耐久性 | 500cycles |

3. Material and Plating/材料和电镀

- | |
|--|
| 3.1 Inner Contact /内导体: Phosphorus-Copper Gold Plating /磷铜镀金 |
| 3.2 Outer Contact /外导体: Brass, nickel plated /黄铜镀镍 |
| 3.3 Insulators /绝缘体: PTFE /聚四氟乙烯 |

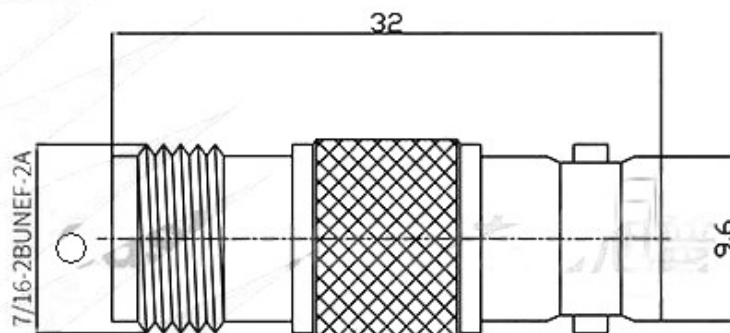

产品型号P/N: TNC/BNC-KK

产品规格书

PRODUCT SPECIFICATION

This document contains proprietary information and such information may not be disclosed to others for any purposes,
本文件包含专有信息，不得出于任何目的向他人披露此类信息。
not used for sales/marketing/procurement purposes without written permission.
未经书面许可，不得用于销售/营销/采购目的。

1. Electrical/电气

1.1 Impedance /阻抗

50Ω

1.2 Frequency /频率

DC-4GHz

1.3 VSWR/驻波

≤1.3

1.4 Dielectric withstanding voltage /介质耐压

500V(rms)

1.5 Center contact resistance /BNC中心接触电阻

≤1.5mΩ

1.6 Outer contact resistance/BNC外部接触电阻

≤1mΩ

1.7 Center contact resistance /MMCX中心接触电阻

≤10mΩ

1.8 Outer contact resistance/MMCX外部接触电阻

≤5mΩ

1.9 Insulation resistance/绝缘电阻

≥1000MΩ

2 Environmenta & Mechanical/环境与机械

2.1 Temperture range/温度范围

-45°~+125°

2.2 Rohs Compliant/符合RoHS

2.3 Durability/耐久性

500cycles


3 Material and Plating/材料和电镀

3.1 Inner Contact/内导体: Phosphorus-Copper Gold Plating/磷铜镀金

3.2 Outer Contact/外导体: Brass, nickel plated/黄铜镀镍

3.3 Outer Contact/MMCX外导体: Brass, Gold plated/黄铜镀金

3.4 Insulators/绝缘体: PTFE/聚四氟乙烯

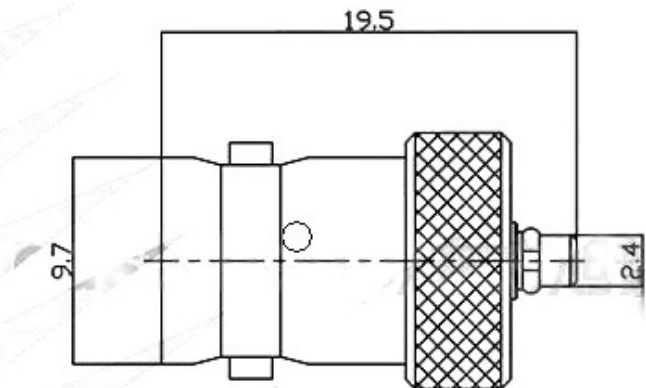

产品型号P/N: BNC/MMCX-KJ

产品规格书

PRODUCT SPECIFICATION

This document contains proprietary information and such information may not be disclosed to others for any purposes,
本文件包含专有信息，不得出于任何目的向他人披露此类信息。
not used for sales/marketing/procurement purposes without written permission.
未经书面许可，不得用于销售/营销/采购目的。

1. Electrical/电气

1.1 Impedance /阻抗

50Ω

1.2 Frequency /频率

DC-4GHz

1.3 VSWR/驻波

≤1.3

1.4 Dielectric withstanding voltage /介质耐压

500V(rms)

1.5 Center contact resistance /BNC中心接触电阻

≤1.5mΩ

1.6 Outer contact resistance/BNC外部接触电阻

≤1mΩ

1.7 Center contact resistance /SMB中心接触电阻


≤6mΩ

1.8 Outer contact resistance/SMB外部接触电阻

≤1mΩ

1.9 Insulation resistance/绝缘电阻

≥1000MΩ

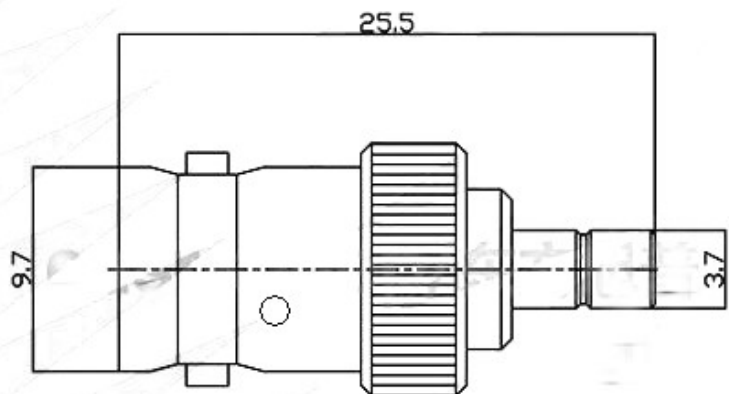

2 Environmenta & Mechanical/环境与机械

2.1 Temperture range/温度范围

-45°~+125°

2.2 Rohs Compliant/符合RoHS

2.3 Durability/耐久性

500cycles

3 Material and Plating/材料和电镀

3.1 Inner Contact/内导体: Phosphorus-Copper Gold Plating/磷铜镀金

3.2 Outer Contact/外导体: Brass, nickel plated/黄铜镀镍

3.3 Insulators/绝缘体: PTFE/聚四氟乙烯

产品型号P/N: BNC/SMB-KJ

产品规格书

PRODUCT SPECIFICATION

This document contains proprietary information and such information may not be disclosed to others for any purposes,
本文件包含专有信息，不得出于任何目的向他人披露此类信息。
not used for sales/marketing/procurement purposes without written permission.
未经书面许可，不得用于销售/营销/采购目的。

1. Electrical/电气

1.1 Impedance /阻抗

50Ω

1.2 Frequency /频率

DC-4GHz

1.3 VSWR/驻波

≤1.25

1.4 Dielectric withstanding voltage /介质耐压

1500V(rms)

1.5 Center contact resistance /中心接触电阻

≤1.5mΩ

1.6 Outer contact resistance /外部接触电阻

≤0.2mΩ

1.7 Insulation resistance /绝缘电阻

≥5000MΩ

2 Environment & Mechanical/环境与机械

2.1 Temperature range/温度范围

-45°~+125°

2.2 RoHS Compliant/符合RoHS

2.3 Durability/耐久性


500cycles

3 Material and Plating/材料和电镀

3.1 Inner Contact/内导体: Phosphorus-Copper Gold Plating/磷铜镀金

3.2 Outer Contact/外导体: Brass, nickel plated/黄铜镀镍

3.3 Insulators/绝缘体: PTFE/聚四氟乙烯

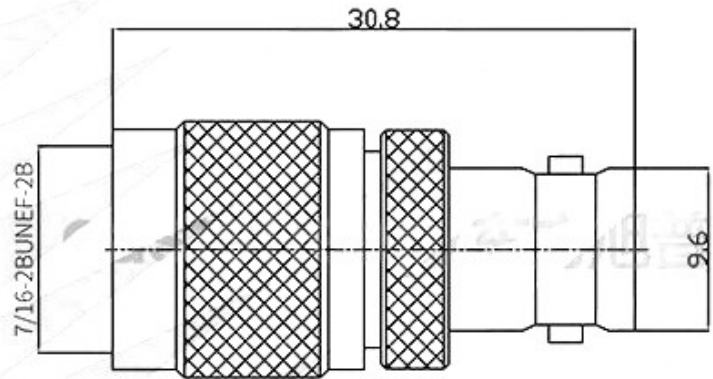

产品型号P/N: TNC/BNC-JK

产品规格书

PRODUCT SPECIFICATION

This document contains proprietary information and such information may not be disclosed to others for any purposes,
本文件包含专有信息,不得出于任何目的向他人披露此类信息。
not used for sales/marketing/procurement purposes without written permission。
未经书面许可,不得用于销售/营销/采购目的。

1..Electrical/电气

1.1 Impedance /阻抗

50Ω

1.2 Frequency /频率

DC-4GHz

1.3 VSWR/驻波

≤1.3

1.4 Dielectric withstanding voltage /介质耐压

500V(rms)

1.5 Center contact resistance /BNC中心接触电阻

≤1.5mΩ

1.6 Outer contact resistance/BNC外部接触电阻

≤1mΩ

1.7 Center contact resistance /MMCX中心接触电阻

≤10mΩ

1.8 Outer contact resistance/MMCX外部接触电阻

≤5mΩ

1.9 Insulation resistance/绝缘电阻

≥1000MΩ

2 Environmenta &Mechanical/环境与机械

2.1 Temperture range/温度范围

-45°~+125°

2.2 Rohs Compliant/符合RoHS

2.3 Durability/耐久性

500cycles


3 Material and Plating/材料和电镀

3.1 Inner Contact/内导体: Brass, Gold plated/黄铜镀金

3.2 Outer Contact/外导体: Brass, nickel plated/黄铜镀镍

3.3 Outer Contact/MMCX外导体: Brass, Gold plated/黄铜镀金

3.4 Insulators/绝缘体: PTFE/聚四氟乙烯

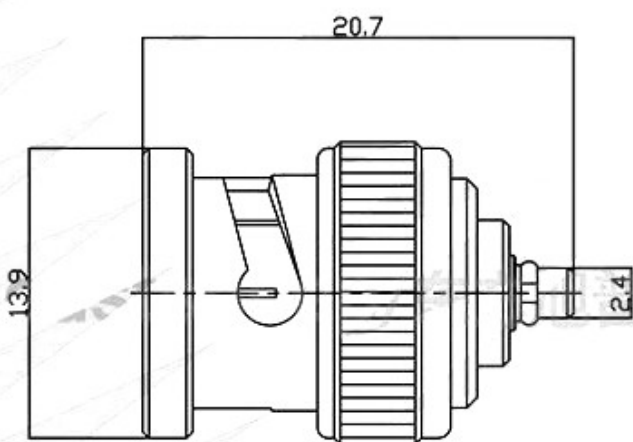

产品型号P/N: BNC/MMCX-JJ

产品规格书

PRODUCT SPECIFICATION

This document contains proprietary information and such information may not be disclosed to others for any purposes,

本文件包含专有信息，不得出于任何目的向他人披露此类信息。

not used for sales/marketing/procurement purposes without written permission.

未经书面许可，不得用于销售/营销/采购目的。

1. Electrical/电气

1.1 Impedance /阻抗

50Ω

1.2 Frequency /频率

DC-4GHz

1.3 Dielectric withstanding voltage /介质耐压

1500V(rms)

1.4 Center contact resistance /中心接触电阻

≤1.5mΩ

1.5 Outer contact resistance /外部接触电阻

≤1mΩ

1.6 Insulation resistance /绝缘电阻

≥5000MΩ

2 Environmental & Mechanical /环境与机械

2.1 Temperature range /温度范围

-45°~+125°

2.2 RoHS Compliant /符合RoHS

2.3 Durability /耐久性


500cycles

3 Material and Plating /材料和电镀

3.1 Inner Contact /内导体: Phosphorus-Copper Gold Plating /磷铜镀金

3.2 Outer Contact /外导体: Brass, nickel plated /黄铜镀镍

3.3 Insulators /绝缘体: PTFE /聚四氟乙烯

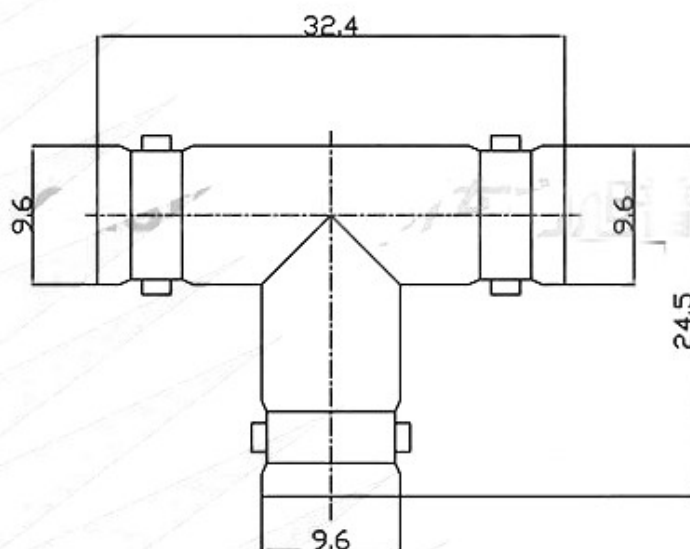

产品型号P/N: BNC-KKK

产品规格书

PRODUCT SPECIFICATION

This document contains proprietary information and such information may not be disclosed to others for any purposes,
本文件包含专有信息,不得出于任何目的向他人披露此类信息。
not used for sales/marketing/procurement purposes without written permission.
未经书面许可,不得用于销售/营销/采购目的。

1. Electrical/电气

1.1 Impedance /阻抗

50Ω

1.2 Frequency /频率

DC-4GHz

1.3 VSWR/驻波

≤1.25

1.4 Dielectric withstanding voltage /介质耐压

1500V(rms)

1.5 Center contact resistance /中心接触电阻

≤1.5mΩ

1.6 Outer contact resistance /外部接触电阻

≤0.2mΩ

1.7 Insulation resistance/绝缘电阻

≥5000MΩ

2 Environmenta & Mechanical/环境与机械

2.1 Temperture range/温度范围

-45°~+125°

2.2 Rohs Compliant/符合RoHS

2.3 Durability/耐久性


500cycles

3 Material and Plating/材料和电镀

3.1 Inner Contact/内导体: Phosphorus-Copper Gold Plating/磷铜镀金

3.2 Outer Contact/外导体: Brass, nickel plated/黄铜镀镍

3.3 Insulators/绝缘体: PTFE/聚四氟乙烯

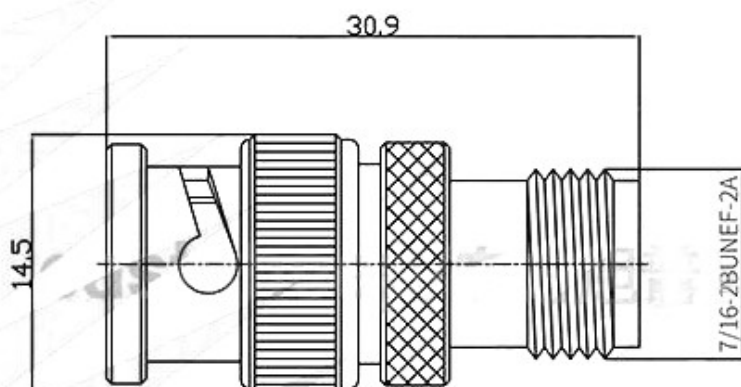

产品型号P/N: TNC/BNC-KJ

产品规格书

PRODUCT SPECIFICATION

This document contains proprietary information and such information may not be disclosed to others for any purposes,
本文件包含专有信息，不得出于任何目的向他人披露此类信息。
not used for sales/marketing/procurement purposes without written permission.
未经书面许可，不得用于销售/营销/采购目的。

1. Electrical/电气

1.1 Impedance /阻抗

1.2 Frequency /频率

1.3 VSWR/驻波

1.4 Dielectric withstanding voltage /介质耐压

1.5 Center contact resistance /BNC中心接触电阻

1.6 Outer contact resistance/BNC外部接触电阻

1.7 Center contact resistance /MMCX中心接触电阻

1.8 Outer contact resistance/MMCX外部接触电阻

1.9 Insulation resistance/绝缘电阻

50Ω

DC-4GHz

≤1.3

500V(rms)

≤1.5mΩ

≤1mΩ

≤10mΩ

≤5mΩ

≥1000MΩ

2 Environment & Mechanical/环境与机械

2.1 Temperature range/温度范围

2.2 RoHS Compliant/符合RoHS

2.3 Durability/耐久性

-45°~+125°

500cycles


3 Material and Plating/材料和电镀

3.1 Inner Contact/内导体: Phosphorus-Copper Gold Plating/磷铜镀金

3.2 Outer Contact/外导体: Brass, nickel plated/黄铜镀镍

3.3 Outer Contact/MMCX外导体: Brass, Gold plated/黄铜镀金

3.4 Insulators/绝缘体: PTFE/聚四氟乙烯

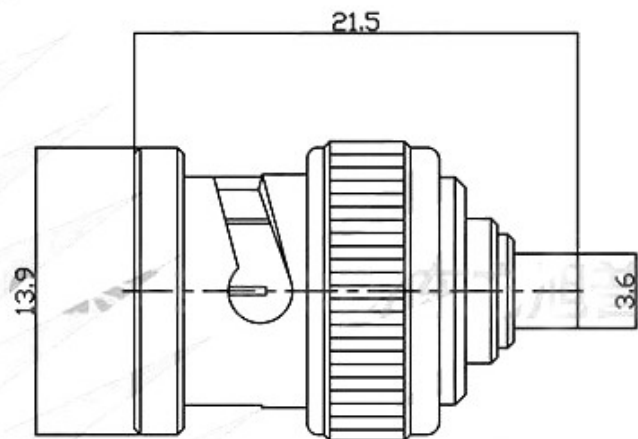

产品型号P/N: BNC/MMCX-JK

产品规格书

PRODUCT SPECIFICATION

This document contains proprietary information and such information may not be disclosed to others for any purposes,
本文件包含专有信息，不得出于任何目的向他人披露此类信息。
not used for sales/marketing/procurement purposes without written permission.
未经书面许可，不得用于销售/营销/采购目的。

1. Electrical/电气

1.1 Impedance /阻抗

50Ω

1.2 Frequency /频率

DC-4GHz

1.3 VSWR/驻波

≤1.25

1.4 Dielectric withstanding voltage /介质耐压

500V(rms)

1.5 Center contact resistance /BNC中心接触电阻

≤1.5mΩ

1.6 Outer contact resistance /BNC外部接触电阻

≤1mΩ

1.7 Center contact resistance /MCX中心接触电阻

≤5mΩ

1.8 Outer contact resistance /MCX外部接触电阻

≤2.5mΩ

1.9 Insulation resistance/绝缘电阻

≥1000MΩ

2. Environmental & Mechanical/环境与机械

2.1 Temperature range/温度范围

-45°~+125°

2.2 RoHS Compliant/符合RoHS

2.3 Durability/耐久性

500cycles


3. Material and Plating/材料和电镀

3.1 Inner Contact/内导体: Brass, Gold plated/黄铜镀金

3.2 Outer Contact/外导体: Brass, nickel plated/黄铜镀镍

3.3 Outer Contact/MCX外导体: Brass, Gold plated/黄铜镀金

3.4 Insulators/绝缘体: PTFE/聚四氟乙烯

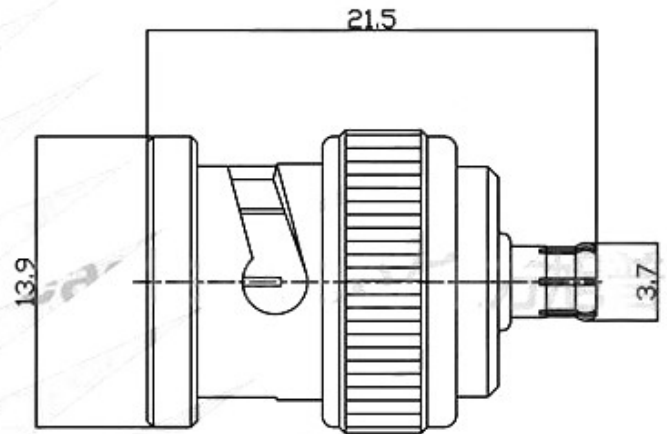

产品型号P/N: BNC/MCX-JJ