


BNC-K-2 BNC 母頭五件套裝接-接 TRRG316 線 (做 TRRG316 電纜)

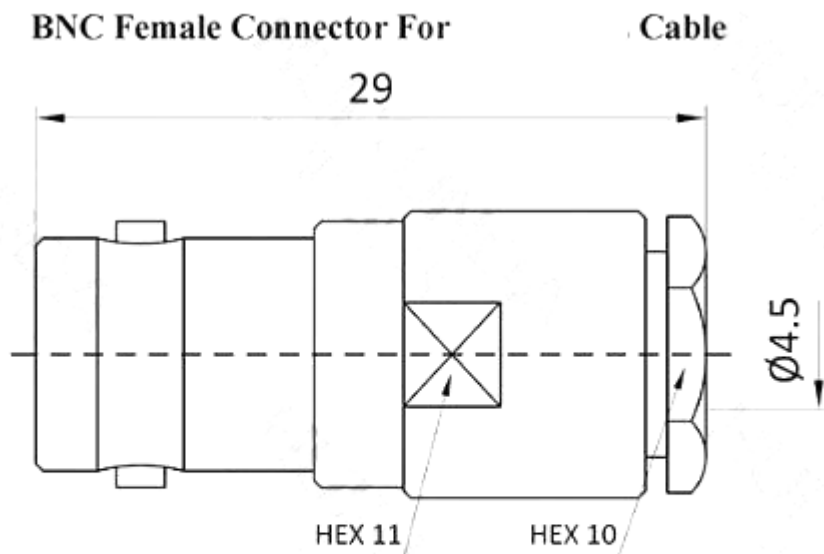

Interface 界面

According to 根据

IEC 60169-8

Electrical 电气

Characteristic Impedance 特性阻抗

50 ohm

Frequency Range 频率范围

DC-4GHz

Dielectric Withstanding Voltage 介质耐压

≥1500V RMS,50hz,at sea level

Working Voltage 工作电压

≤750V RMS,50Hz,at sea level

Dielectric Resistance 介电常数

≥5000MΩ

Contact Resistance 接触电阻

Center Contact 中心 ≤1.5mΩ

Outer Contact 外部 ≤1mΩ

Environmental 环境 & Mechanical 机械

Temperature Range 温度范围

-45°C ~ +125°C

Durability 耐久性

≥500 cycles

ROHS compliant 符合 ROHS

Full ROHS compliance

Material and Plating 材料及涂镀

Body 壳体

Material 材料

Brass 黄铜

Plating 电镀

Ni 镍

Insulator 绝缘体

PTFE 聚四氟乙烯

—

Center conductor 中心导体

Brass 黄铜

Au 金