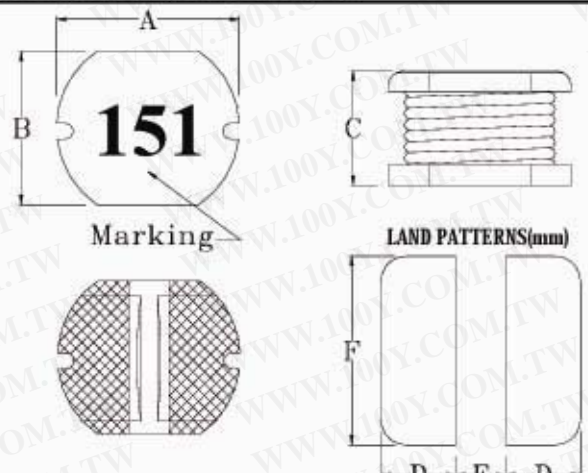


# SPECIFICATION FOR APPROVAL

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

COMMODITY		SPEC NO.		
ITEM	<b>JTP 0705-151K</b>	<span style="border: 1px solid black; padding: 2px;">Green</span>		
<p>(1) DIMENSION: (UNIT: mm)</p> 		DIM.	TOL.	
		A	7.8	±0.3
		B	7.0	±0.3
		C	5.0	±0.5
		D	3.0	REF.
		E	2.0	REF.
		F	7.5	REF.
		G		
		H		
		I		
		J		
(2) ELECTRICAL CHARACTERISTIC		TEST INSTRUMENTS.		
INDUCTANCE	150 ± 10 • • μH	<input checked="" type="checkbox"/> AGILENT 4294A Precision Impedance Analyzer.		
TEST FREQUENCY	1 KHz	<input type="checkbox"/> AGILENT 4285A Precision L.C.R. Meter. <input type="checkbox"/> HP-4286A RF L.C.R. Meter.		
TEST VOLT	0.25 V	<input checked="" type="checkbox"/> ZENTECH 3302 Automatic Components Analyzer.		
RDC	0.64 (max) Ω	<input type="checkbox"/> ZENTECH 101 L.C.R. Meter. <input type="checkbox"/> WAYNE KERR 6420 Precision Impedance Analyzer.		
IDC *1	0.58 (max) A	<input checked="" type="checkbox"/> ZENTECH 1320 BIAS CURRENT. <input checked="" type="checkbox"/> ZENTECH 502AC Resistance Merter.		
		<input type="checkbox"/> ADEX AX-1155B DC Low Ohm Meter.		
REMARK • •				
1. This indicates the value of current when the inductance is 10% lower than its initial value at D.C. superimposition or D.C. current when at t=40°C, whichever is lower. (Ta=20°C)				