

# General Purpose Power Entry Module with Fuses



- Rated currents up to 10 A
- For one or two fuses
- Optional safety version (A type)
- Complies with IEC/EN 60601-1
- Snap-in versions (S type)



## Performance indicators

Attenuation performance



Rated current [A]



勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## Technical specifications

<b>Maximum continuous operating voltage</b>	250 VAC, 50/60 Hz
<b>Operating frequency</b>	dc to 400 Hz
<b>Rated currents</b>	1 to 10 A @ 40°C max.
<b>High potential test voltage</b>	P → PE 2000 VAC for 2 sec (standard types) P → PE 2500 VAC for 2 sec (B types) P → N 760 VAC for 2 sec (standard types) P → N 1700 VDC for 2 sec (B types)
<b>Protection category</b>	IP 40 according to IEC 60529
<b>Temperature range (operation and storage)</b>	-25°C to +85°C (25/85/21)
<b>Design corresponding to</b>	UL 1283, CSA 22.2 No. 8 1986, IEC/EN 60939
<b>Flammability corresponding to</b>	UL 94 V-2 or better
<b>MTBF @ 40°C/230 V (Mil-HB-217F)</b>	2,200,000 hours
<b>Fuse holder</b>	1 or 2 fuses (Ø5 x 20 mm)

## Approvals



The FN 9260 power entry module combines an IEC inlet, mains filter with excellent filter attenuation and fuses in a small form factor. Choosing FN 9260 product line brings you rapid availability of a standard filter associated with the necessary safety acceptances. Standard IEC connector filters are a practical solution helping you to pass EMI system approval in a short time. A wide selection on amperage ratings, output connections, mounting possibilities and filters for medical applications are designed to offer you the desired solution.

## Features and Benefits


- Exceptional conducted attenuation performance, based on chokes with high saturation resistance and excellent thermal behavior
- B types comply with the requirements of IEC/EN 60601-1 for creepage and clearance, leakage current and high potential testing
- Versions up to 10 A are available with fuse holder for one or two fuses
- Custom-specific versions are available on request

## Typical applications


- Portable electrical and electronic equipment
- Medical equipment
- Small to medium-sized machines and household equipment
- Single-phase power supplies, switch-mode power supplies
- Test and measurement equipment

## Typical electrical schematic


FN 9260 (B types without Y-capacitors)

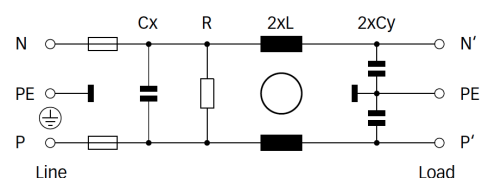

FN 261

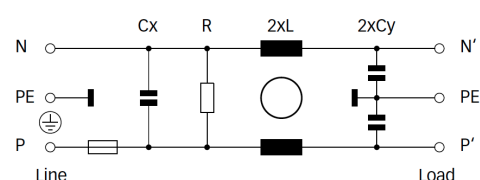


## Filter selection table

Filter	Rated current @ 40°C (25°C)	Leakage current* @ 230 VAC/50 Hz	Inductance L	Capacitance		Resistance R	Input/Output connections	Fuses	Weight
				Cx	Cy				
	[A]	[µA]	[mH]	[µF]	[nF]	[kΩ]		[Qty]	[g]
<b>FN 9260 x-1-06-y</b>	1 (1.2)	373	5.3	0.1	2.2	1000	-06	2	55
<b>FN 9260 x-2-06-y</b>	2 (2.3)	373	2.7	0.1	2.2	1000	-06	2	55
<b>FN 9260 x-4-06-y</b>	4 (4.6)	373	1.0	0.1	2.2	1000	-06	2	55
<b>FN 9260 x-6-06-y</b>	6 (6.9)	373	0.3	0.1	2.2	1000	-06	2	55
<b>FN 9260 x-10-06-y</b>	10 (11.5)	373	0.2	0.1	2.2	1000	-06	2	55
<b>FN 9260 xA1-1-06-y</b>	1 (1.2)	37	5.3	0.1	0.22	1000	-06	2	55
<b>FN 9260 xA-2-06-y</b>	2 (2.3)	74	2.7	0.1	0.47	1000	-06	2	55
<b>FN 9260 xA-4-06-y</b>	4 (4.6)	74	1.0	0.1	0.47	1000	-06	2	55
<b>FN 9260 xA-6-06-y</b>	6 (6.9)	74	0.3	0.1	0.47	1000	-06	2	55
<b>FN 9260 xA-10-06-y</b>	10 (11.5)	74	0.2	0.1	0.47	1000	-06	2	55
<b>FN 9260 xB-1-06-y</b>	1 (1.2)	2	5.3	0.1		1000	-06	2	55
<b>FN 9260 xB-2-06-y</b>	2 (2.3)	2	2.7	0.1		1000	-06	2	55
<b>FN 9260 xB-4-06-y</b>	4 (4.6)	2	1.0	0.1		1000	-06	2	55
<b>FN 9260 xB-6-06-y</b>	6 (6.9)	2	0.3	0.1		1000	-06	2	55
<b>FN 9260 xB-10-06-y</b>	10 (11.5)	2	0.2	0.1		1000	-06	2	55
<b>FN 261 x-1-06-y</b>	1 (1.2)	373	5.3	0.1	2.2	1000	-06	1	55
<b>FN 261 x-2-06-y</b>	2 (2.3)	373	2.7	0.1	2.2	1000	-06	1	55
<b>FN 261 x-4-06-y</b>	4 (4.6)	373	1.0	0.1	2.2	1000	-06	1	55
<b>FN 261 x-6-06-y</b>	6 (6.9)	373	0.3	0.1	2.2	1000	-06	1	55
<b>FN 261 x-10-06-y</b>	10 (11.5)	373	0.2	0.1	2.2	1000	-06	1	55

\* Maximum leakage under normal operating conditions. Note: if the neutral line is interrupted, worst case leakage could reach twice this level.

## Product selector

FN 9260xx-yy-yy-y



Snap-in range for S version only

10: Snap-in range 0.6 to 1.5mm

20: Snap-in range 1.6 to 2.5mm

30: Snap-in range 2.6 to 3.5mm

06: Faston 6.3 x 0.8mm (spade/soldering)

1 to 10: Rated current

Blank: Standard version

A: Safety version

B: Medical version (without Y-capacitor)



Blank: Standard housing with mounting flanges

S: Snap-in version, snapper on vertical side


勝特力材料 886-3-5753170  
 胜特力电子(上海) 86-21-34970699  
 胜特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

For example: FN 9260-1-06-10, FN 9260 SB-10-06-20, FN 261 S-6-06-30


Typical filter attenuation

Per CISPR 17; A=50 Ω/50 Ω sym; B=50 Ω/50 Ω asym; C=0.1 Ω/100 Ω sym; D=100 Ω/0.1 Ω sym


FN 9260: 1 to 4 A types




FN 9260: 6 and 10 A types



FN 261: 1 to 4 A types



FN 261: 6 and 10 A types



Mechanical data

FN 9260/FN 261

FN 9260 S/FN 261 S

Dimensions

	FN 261	FN 261 S	
	FN 9260	FN 9260 S	Tolerances
A	46	34	±0.3
B	35	35	±0.3
C	36		±0.3
D	41	41	±0.3
E	27.8	27.8	+0.3/-0
F	5.5	5.5	±0.3
G	32	32	+0.3/-0
H	Ø3.2		±0.1
I	13.8	13.8	
J	12.5	12.5	±0.3
M	R ≤3.5	R ≤3.5	
N	33	33	+0.3/-0
P	29	29.5	±0.3
R	M3		
S	90°		
T*		0.6-1.5	
T*		1.6-2.5	
T*		2.6-3.5	

\* For selecting the panel thickness, please refer to the filter selector table.

All dimensions in mm; 1 inch = 25.4 mm  
Tolerances according: ISO 2768-m/EN 22768-m

Please visit [www.schaffner.com](http://www.schaffner.com) to find more details on filter connections.

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-34970699  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)