


勝特力電材超市-龍山店 886-3-5773766
 勝特力電材超市-光復店 886-3-5729570
 勝特力電子(上海) 86-21-34970699
 勝特力電子(深圳) 86-755-83298787
<http://www.100y.com.tw>

AD-A3D8

SMA Plug To MCX Jack
6GHz VSWR 1.2

50Ω

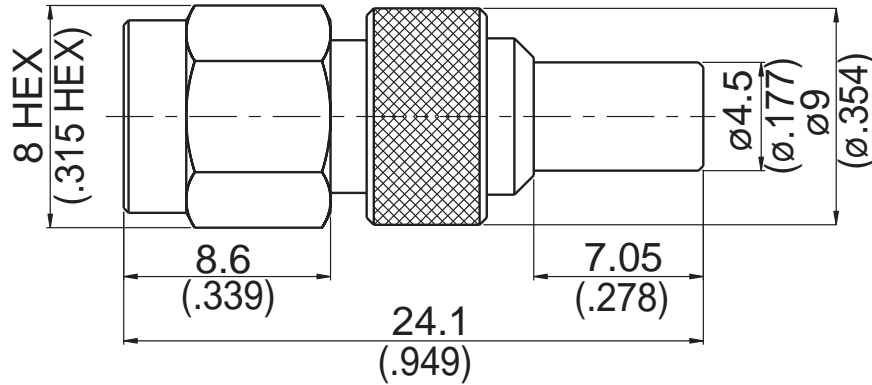

Parts	Material	Plating (Micro-inch)
Renber Ring	Beryllium Copper	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Gasket	Silicon	
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Insulator	Teflon	
Body	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Coupling Nut	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20

Weight: 5.38 g


This part number complies with RoHS.

Notice: JYBAO reserves the right to make modifications deemed appropriate.

AD-A3D8	SMA Plug To MCX Jack 6GHz VSWR 1.2																									
<div data-bbox="129 344 531 394" style="border: 1px solid black; padding: 2px;">Interface</div> Standard Mechanically Compatible With	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%;">SMA</th> <th style="width: 50%;">MCX</th> </tr> </thead> <tbody> <tr> <td>MIL-STD-348B</td> <td>IEC 61169-36</td> </tr> <tr> <td>2.92 & 3.5</td> <td></td> </tr> </tbody> </table>	SMA	MCX	MIL-STD-348B	IEC 61169-36	2.92 & 3.5																				
SMA	MCX																									
MIL-STD-348B	IEC 61169-36																									
2.92 & 3.5																										
<div data-bbox="129 562 531 611" style="border: 1px solid black; padding: 2px;">Electrical Data</div> Impedance Frequency Range VSWR Insertion Loss Insulation Resistance Dielectric Withstanding Voltage (at sea level) Working Voltage (at sea level)	<table style="width: 100%;"> <tbody> <tr> <td style="width: 50%;">Impedance</td> <td colspan="2">50Ω</td> </tr> <tr> <td>Frequency Range</td> <td colspan="2">DC To 6GHz</td> </tr> <tr> <td>VSWR</td> <td colspan="2">≤ 1.2 (DC To 6GHz)</td> </tr> <tr> <td>Insertion Loss</td> <td colspan="2">≤ 0.03 x √f(GHz) dB</td> </tr> <tr> <td>Insulation Resistance</td> <td colspan="2">≥ 5000MΩ</td> </tr> <tr> <td>Dielectric Withstanding Voltage (at sea level)</td> <td colspan="2">750 V rms</td> </tr> <tr> <td>Working Voltage (at sea level)</td> <td colspan="2">250 V rms</td> </tr> </tbody> </table>		Impedance	50Ω		Frequency Range	DC To 6GHz		VSWR	≤ 1.2 (DC To 6GHz)		Insertion Loss	≤ 0.03 x √f(GHz) dB		Insulation Resistance	≥ 5000MΩ		Dielectric Withstanding Voltage (at sea level)	750 V rms		Working Voltage (at sea level)	250 V rms				
Impedance	50Ω																									
Frequency Range	DC To 6GHz																									
VSWR	≤ 1.2 (DC To 6GHz)																									
Insertion Loss	≤ 0.03 x √f(GHz) dB																									
Insulation Resistance	≥ 5000MΩ																									
Dielectric Withstanding Voltage (at sea level)	750 V rms																									
Working Voltage (at sea level)	250 V rms																									
<div data-bbox="129 1059 531 1108" style="border: 1px solid black; padding: 2px;">Mechanical Data</div> Recommended Coupling Nut Torque Coupling Proof Torque Coupling Nut Retention Force Engagement Force Disengagement Force Contact Captivation-axial Durability (mating)	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%;"></th> <th style="width: 25%;">SMA</th> <th style="width: 25%;">MCX</th> </tr> </thead> <tbody> <tr> <td>Recommended Coupling Nut Torque</td> <td>4 in-lbs</td> <td>NA</td> </tr> <tr> <td>Coupling Proof Torque</td> <td>5.3 in-lbs</td> <td>NA</td> </tr> <tr> <td>Coupling Nut Retention Force</td> <td>≥ 60.7 lbs</td> <td>NA</td> </tr> <tr> <td>Engagement Force</td> <td>NA</td> <td>≤ 5.6 lbs</td> </tr> <tr> <td>Disengagement Force</td> <td>NA</td> <td>1.8 to 4.5 lbs</td> </tr> <tr> <td>Contact Captivation-axial</td> <td>≥ 6.1 lbs</td> <td>≥ 2.3 lbs</td> </tr> <tr> <td>Durability (mating)</td> <td>≥ 100</td> <td>≥ 500</td> </tr> </tbody> </table>			SMA	MCX	Recommended Coupling Nut Torque	4 in-lbs	NA	Coupling Proof Torque	5.3 in-lbs	NA	Coupling Nut Retention Force	≥ 60.7 lbs	NA	Engagement Force	NA	≤ 5.6 lbs	Disengagement Force	NA	1.8 to 4.5 lbs	Contact Captivation-axial	≥ 6.1 lbs	≥ 2.3 lbs	Durability (mating)	≥ 100	≥ 500
	SMA	MCX																								
Recommended Coupling Nut Torque	4 in-lbs	NA																								
Coupling Proof Torque	5.3 in-lbs	NA																								
Coupling Nut Retention Force	≥ 60.7 lbs	NA																								
Engagement Force	NA	≤ 5.6 lbs																								
Disengagement Force	NA	1.8 to 4.5 lbs																								
Contact Captivation-axial	≥ 6.1 lbs	≥ 2.3 lbs																								
Durability (mating)	≥ 100	≥ 500																								
<div data-bbox="129 1603 531 1653" style="border: 1px solid black; padding: 2px;">Environmental Data</div> Temperature Range Thermal Shock Moisture Resistance Corrosion RoHS	<table style="width: 100%;"> <tbody> <tr> <td style="width: 50%;">Temperature Range</td> <td colspan="2">-55°C to +155°C</td> </tr> <tr> <td>Thermal Shock</td> <td colspan="2">MIL-STD-202, Method 107, Condition B</td> </tr> <tr> <td>Moisture Resistance</td> <td colspan="2">MIL-STD-202, Method 206</td> </tr> <tr> <td>Corrosion</td> <td colspan="2">MIL-STD-202, Method 101, Condition B</td> </tr> <tr> <td>RoHS</td> <td colspan="2">Compliant</td> </tr> </tbody> </table>		Temperature Range	-55°C to +155°C		Thermal Shock	MIL-STD-202, Method 107, Condition B		Moisture Resistance	MIL-STD-202, Method 206		Corrosion	MIL-STD-202, Method 101, Condition B		RoHS	Compliant										
Temperature Range	-55°C to +155°C																									
Thermal Shock	MIL-STD-202, Method 107, Condition B																									
Moisture Resistance	MIL-STD-202, Method 206																									
Corrosion	MIL-STD-202, Method 101, Condition B																									
RoHS	Compliant																									

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

ADS-A3D8 (+AD-A8D3)

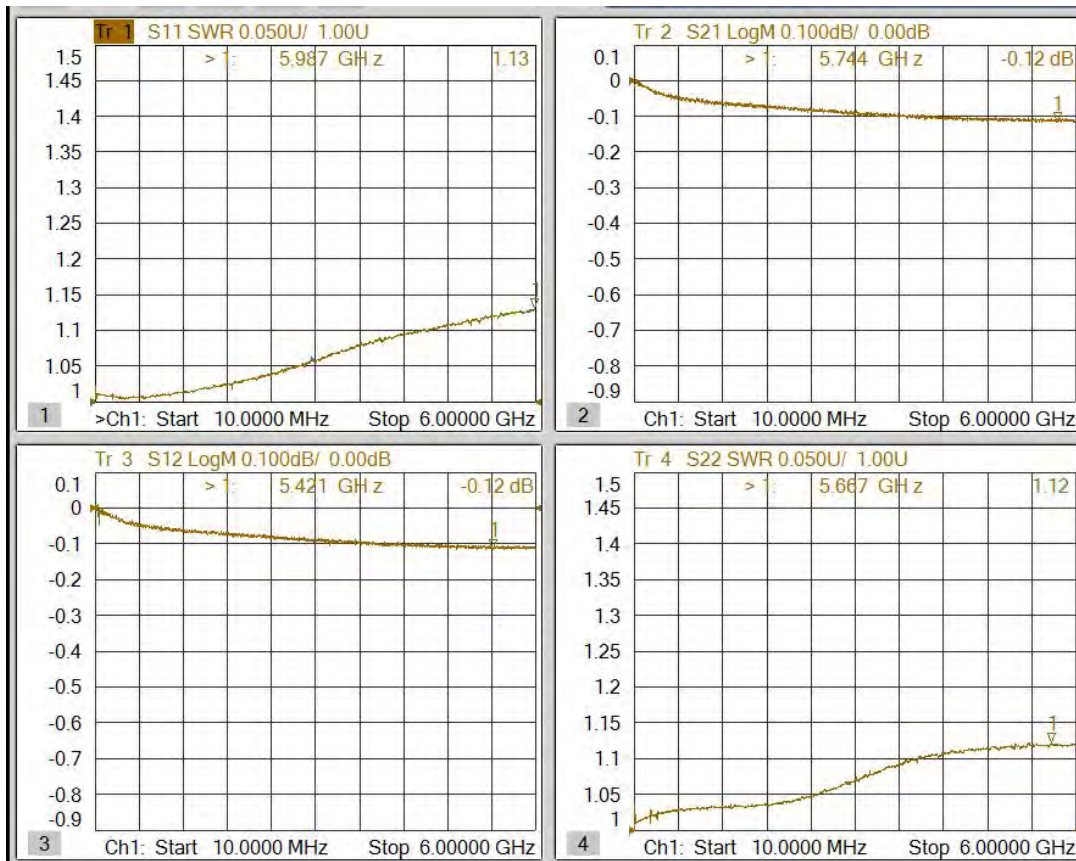

Notes:

1. IL of AD-A8D3+AD-A3D8 measured
2. $IL/2 = IL$ of AD-A3D8

勝特力電材超市-龍山店 886-3-5773766
勝特力電材超市-光復店 886-3-5729570
勝特力電子(上海) 86-21-34970699
勝特力電子(深圳) 86-755-83298787
<http://www.100y.com.tw>