


勝特力電材超市-龍山店 886-3-5773766
 勝特力電材超市-光復店 886-3-5729570
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
<http://www.100y.com.tw>

AD-A3E8

SMA Plug To MMCX Jack
6GHz VSWR 1.2

50Ω

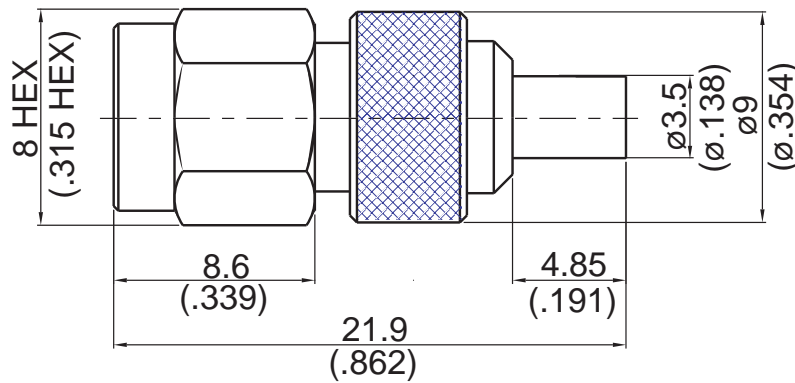

Parts	Material	Plating (Micro-inch)
Insulator	Teflon	
Rinber Ring	Beryllium Copper	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Gasket	Silicon	
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Body	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Coupling Nut	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20

Weight: 5.19 g

This part number complies with RoHS.

Notice: JYBAO reserves the right to make modifications deemed appropriate.

AD-A3E8		SMA Plug To MMCX Jack 6GHz VSWR 1.2	
Interface		SMA	MMCX
Standard		MIL-STD-348B	IEC 61169-52
Mechanically Compatible With		2.92 & 3.5	
Electrical Data			
Impedance	50Ω		
Frequency Range	DC To 6GHz		
VSWR	≤ 1.2 (DC To 6GHz)		
Insertion Loss	≤ 0.03 x √f(GHz) dB		
Insulation Resistance	≥ 5000MΩ		
Dielectric Withstanding Voltage (at sea level)	500 V rms		
Working Voltage (at sea level)	170 V rms		
Mechanical Data			
	SMA	MMCX	
Recommended Coupling Nut Torque	4 in-lbs	NA	
Coupling Proof Torque	5.3 in-lbs	NA	
Coupling Nut Retention Force	≥ 60.7 lbs	NA	
Engagement Force	NA	≤ 3.4 lbs	
Disengagement Force	NA	1.4 to 3.4 lbs	
Contact Captivation-axial	≥ 6.1 lbs	≥ 2.3 lbs	
Durability (mating)	≥ 100	≥ 500	
Environmental Data			
Temperature Range	-55°C to +155°C		
Thermal Shock	MIL-STD-202, Method 107, Condition B		
Moisture Resistance	MIL-STD-202, Method 206		
Corrosion	MIL-STD-202, Method 101, Condition B		
RoHS	Compliant		

Notice: JYEBAO reserves the right to make modifications deemed appropriate.