


Multi-stage EMI Filter




- Rated currents from 6 to 10 A
- Surge pulse protection up to 2 kV
- Solder or screw connection



Performance indicators

Attenuation performance

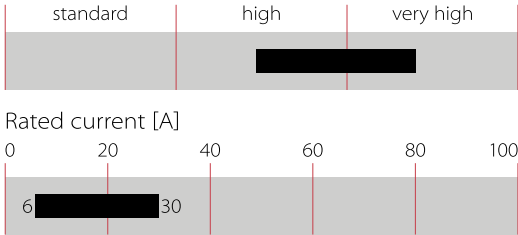

勝特力材料 886-3-5753170  
胜特力电子(上海) 86-21-34970699  
胜特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

Technical Specifications

Maximum continuous operating voltage	250 VAC, 50/60 Hz
Operating frequency	DC to 400 Hz
Surge pulse protection	2 kV IEC 61000-4-5
Rated currents	6 to 10 A @ 40°C max.
High potential test voltage	P → PE 2000 VAC for 2 sec P → N 350 VDC for 2 sec
Energy absorption	40J
Temperature range (operation and storage)	-25°C to +85°C (25/85/21)
Flammability corresponding to	UL 94 V-2 or better
Design corresponding to	UL 1283, CSA 22.2 No. 8 1986, IEC/EN 60939

Approvals & Compliances




Features and Benefits

- FN352Z series is developed to meet high filter attenuation requirements by using multi-stage filter design
- Additional high surge pulse voltage protection up to 2 kV is integrated to protect sensitive equipment
- Choosing FN352Z product line brings you the rapid availability of a standard filter associated with the necessary safety acceptances
- Standard filters are a practical solution helping you to pass EMI system approval in a short time
- Exceptional conducted attenuation performance, based on multi-stage design and chokes with high saturation resistance and excellent thermal behavior
- Various connection options
- Custom-specific versions on request

Typical Applications

- Facility management
- Industrial
- Telecommunication
- Data processing
- Electrical and electronic equipment

Typical electrical schematic

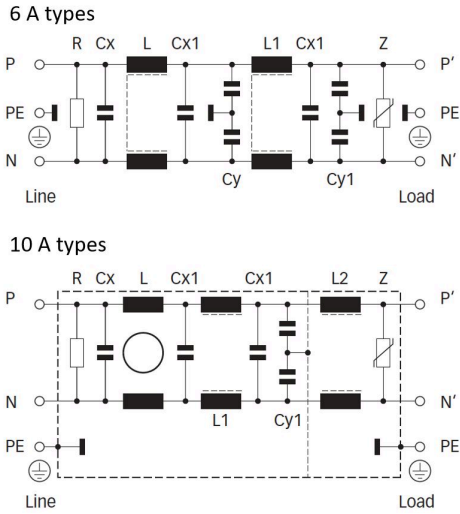

Filter Selection Table


Filter	Rated current @ 40°C (25°C)  [A]	Leakage current* @ 230 VAC/50 Hz [µA]	Inductance			Capacitance				Resistance R  [MΩ]	Energy absorption  [J]	Input/Output connections		Weight  [g]
			L	L1	L2	Cx	Cx1	Cy	Cy1					
			[mH]	[mH]	[mH]	[nF]	[nF]	[nF]	[nF]					
FN352Z-6-06	6 (7.2)	420	3	3		470	220	3.3	1.5	0.47	40	-06		575
FN352Z-10-29	10 (12)	1300	5	0.06	0.003	220	220	15	15	0.47	40		-29	1320

\* Maximum leakage under normal operating conditions.  
Note: if the neutral line is interrupted, worst case leakage could reach twice this level.


Typical Filter Attenuation

Per CISPR 17; A=50 Ω/50 Ω sym; B=50 Ω/50 Ω asym; C=0.1 Ω/100 Ω sym; D=100 Ω/0.1 Ω sym

6 A types


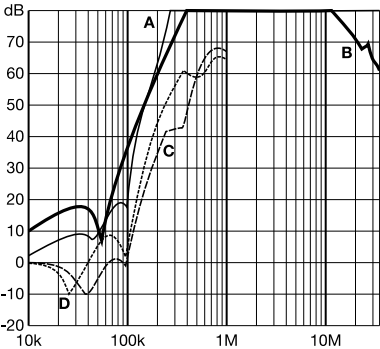


10 A types

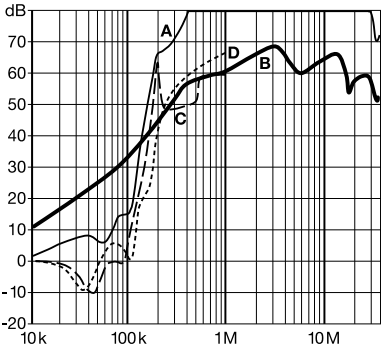

勝特力材料 886-3-5753170  
胜特力电子(上海) 86-21-34970699  
胜特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

Mechanical Data

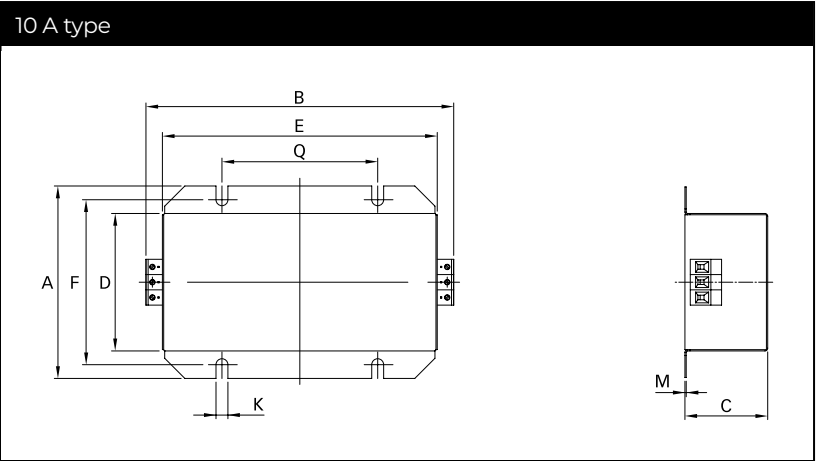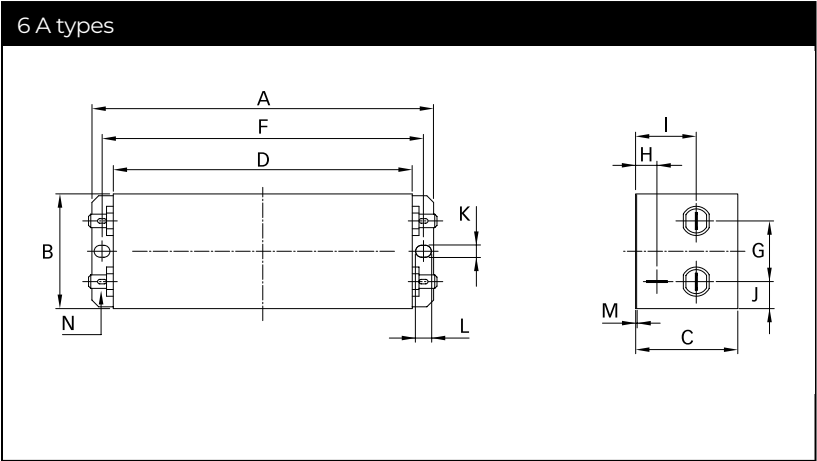



Dimensions

	6 A	10 A	Tolerances
A	152	126	±0.5
B	51	172.3	±0.5
C	45	55.25	±0.5
D	133	100.5	±0.5
E		150.5	±0.5
F	143	112	±0.5
G	27		±0.5
H	9.5		±0.5
I	27		±0.5
J	12		±0.5
K	5.3	6.4	
L	7		
M	0.5		
N	6.3 x 0.8		
Q		85	±0.1

All dimensions in mm; 1 inch = 25.4 mm  
Tolerances according: ISO 2768-m/EN 22768-m

Filter Input/Output Connector Cross Sections

	-06	-29
		
Solid wire	n/a	6 mm <sup>2</sup>
Flex wire	n/a	4 mm <sup>2</sup>
AWG type wire	n/a	AWG 10
Recommended torque	n/a	0.6-0.8 Nm

Please visit [www.schaffner.com](http://www.schaffner.com) to find more details on filter connectors.

勝 特 力 材 料 886-3-5753170  
胜特力电子(上海) 86-21-34970699  
胜特力电子(深圳) 86-755-83298787  
Http://www.100y.com.tw