


AD-A8B8

SMA Jack To BNC Jack
4GHz VSWR 1.2

50Ω

勝特力電材超市-龍山店 886-3-5773766
 勝特力電材超市-光復店 886-3-5729570
 勝特力電子(上海) 86-21-34970699
 勝特力電子(深圳) 86-755-83298787
<http://www.100y.com.tw>

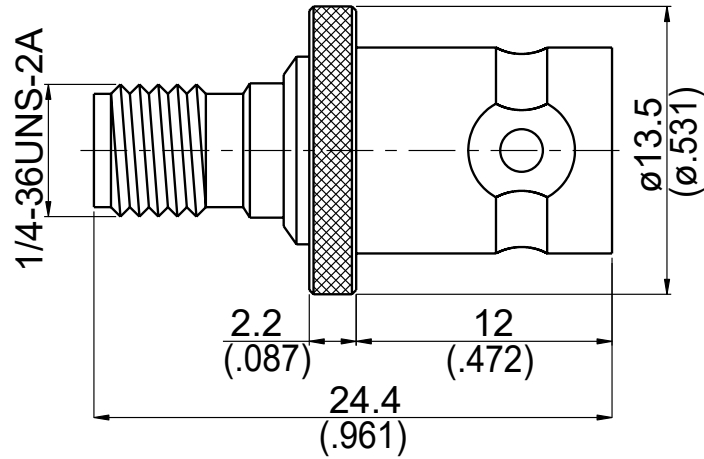

Parts	Material	Plating (Micro-inch)
Center Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Insulator	Teflon	
Body(SMA)	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Body(BNC)	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50

Weight: 6.4 g

AD-A8B8	SMA Jack To BNC Jack 4GHz VSWR 1.2											
Interface Standard Mechanically compatible with	<table border="1"> <thead> <tr> <th>SMA</th> <th>BNC</th> </tr> </thead> <tbody> <tr> <td>MIL-STD-348B</td> <td>MIL-STD-348B</td> </tr> <tr> <td>2.92 & 3.5</td> <td></td> </tr> </tbody> </table>	SMA	BNC	MIL-STD-348B	MIL-STD-348B	2.92 & 3.5						
SMA	BNC											
MIL-STD-348B	MIL-STD-348B											
2.92 & 3.5												
Electrical Data Impedance Frequency Range VSWR Insertion Loss Insulation Resistance Dielectric Withstanding Voltage (at sea level) Working Voltage (at sea level)	<table border="1"> <tbody> <tr> <td>50Ω</td> </tr> <tr> <td>DC To 4GHz</td> </tr> <tr> <td>≤ 1.2 (DC To 4GHz)</td> </tr> <tr> <td>≤ 0.05 x √f(GHz) dB</td> </tr> <tr> <td>≥ 5000MΩ</td> </tr> <tr> <td>1500 V rms</td> </tr> <tr> <td>500 V rms</td> </tr> </tbody> </table>		50Ω	DC To 4GHz	≤ 1.2 (DC To 4GHz)	≤ 0.05 x √f(GHz) dB	≥ 5000MΩ	1500 V rms	500 V rms			
50Ω												
DC To 4GHz												
≤ 1.2 (DC To 4GHz)												
≤ 0.05 x √f(GHz) dB												
≥ 5000MΩ												
1500 V rms												
500 V rms												
Mechanical Date Recommended Coupling Nut Torque Coupling Proof Torque Contact Captivation-axial Durability (mating)	<table border="1"> <thead> <tr> <th>SMA</th> <th>BNC</th> </tr> </thead> <tbody> <tr> <td>4 in-lbs</td> <td>0.6 to 2.5 in-lbs</td> </tr> <tr> <td>5.3 in-lbs</td> <td>NA</td> </tr> <tr> <td>≥ 6.1 lbs</td> <td>≥ 6.1 lbs</td> </tr> <tr> <td>≥ 100</td> <td>≥ 500</td> </tr> </tbody> </table>		SMA	BNC	4 in-lbs	0.6 to 2.5 in-lbs	5.3 in-lbs	NA	≥ 6.1 lbs	≥ 6.1 lbs	≥ 100	≥ 500
SMA	BNC											
4 in-lbs	0.6 to 2.5 in-lbs											
5.3 in-lbs	NA											
≥ 6.1 lbs	≥ 6.1 lbs											
≥ 100	≥ 500											
Environmental Data Temperature Range Thermal Shock Moisture Resistance Corrosion RoHS	<table border="1"> <tbody> <tr> <td>-65°C to +165°C</td> </tr> <tr> <td>MIL-STD-202, Method</td> </tr> <tr> <td>MIL-STD-202, Method</td> </tr> <tr> <td>MIL-STD-202, Method</td> </tr> <tr> <td>Compliant</td> </tr> </tbody> </table>		-65°C to +165°C	MIL-STD-202, Method	MIL-STD-202, Method	MIL-STD-202, Method	Compliant					
-65°C to +165°C												
MIL-STD-202, Method												
MIL-STD-202, Method												
MIL-STD-202, Method												
Compliant												
<div style="border: 2px solid red; padding: 5px;"> <p> 勝特力電材超市-龍山店 886-3-5773766 勝特力電材超市-光復店 886-3-5729570 勝特力電子(上海) 86-21-34970699 勝特力電子(深圳) 86-755-83298787 http://www.100y.com.tw </p> </div>												