


勝特力電材超市-龍山店 886-3-5773766
 勝特力電材超市-光復店 886-3-5729570
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
<http://www.100y.com.tw>

AD-B3B8A

BNC plug to BNC jack
4GHz VSWR 1.2

50Ω

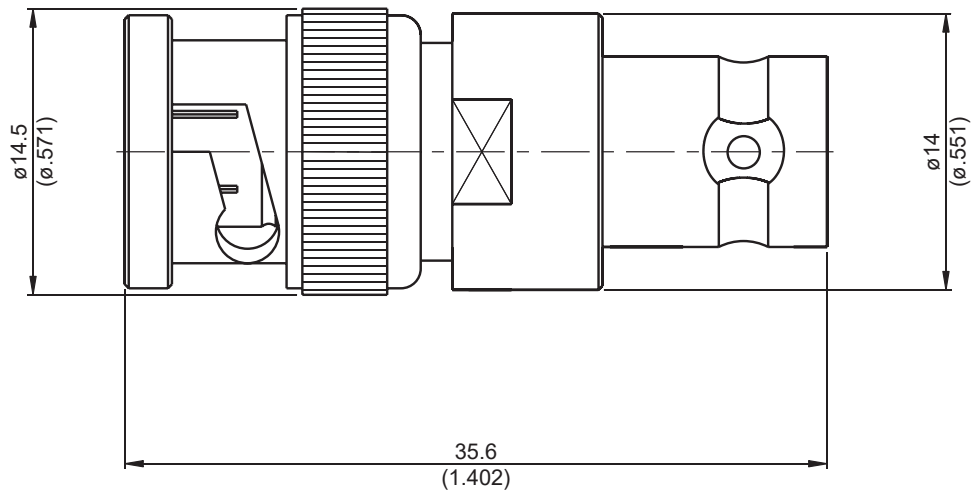

Parts	Material	Plating (Micro-inch)
Contact Pin	Phosphor Bronze	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Insulator	Teflon	
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Coupling Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Spring	SK5	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Gasket	Silicon	
Washer	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50

Weight: 18.98 g


This part number complies with RoHS.

Notice: JYBAO reserves the right to make modifications deemed appropriate.

AD-B3B8A	BNC plug to BNC jack 4GHz VSWR 1.2
<div data-bbox="129 344 531 389" style="border: 1px solid black; padding: 2px;">Interface</div> Standard	MIL-STD-348B
<div data-bbox="129 557 531 602" style="border: 1px solid black; padding: 2px;">Electrical Data</div> Impedance Frequency Range VSWR Insertion Loss Insulation Resistance Dielectric Withstanding Voltage (at sea level) Working Voltage (at sea level)	50Ω DC to 4GHz ≤ 1.2 (DC To 4GHz) $\leq 0.06 \times \sqrt{f(\text{GHz})}$ dB $\geq 5000\text{M}\Omega$ 1500 V rms 500 V rms
<div data-bbox="129 1055 531 1099" style="border: 1px solid black; padding: 2px;">Mechanical Data</div> Recommended Coupling Nut Torque Coupling Nut Retention Force Contact Captivation-axial Durability (mating)	0.6 to 2.5 in-lbs ≥ 101.2 lbs ≥ 6.1 lbs ≥ 500
<div data-bbox="129 1408 531 1453" style="border: 1px solid black; padding: 2px;">Environmental Data</div> Temperature Range Thermal Shock Moisture Resistance Corrosion RoHS	-65°C to +165°C MIL-STD-202, Method 107, Condition B MIL-STD-202, Method 206 MIL-STD-202, Method 101, Condition B Compliant

Notice: JYBAO reserves the right to make modifications deemed appropriate.

AD-B3B8A

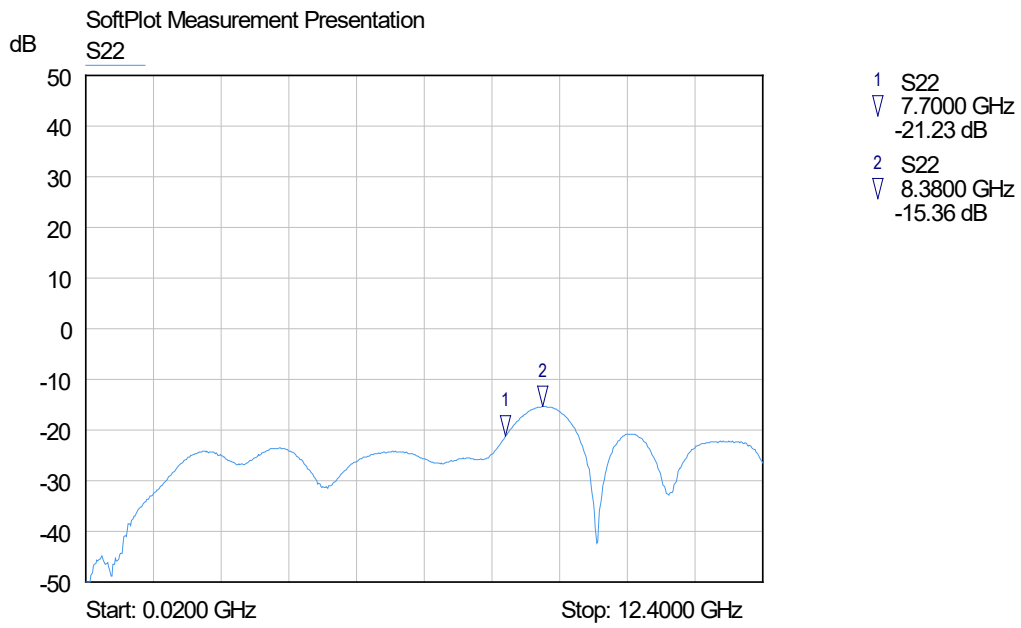

勝特力電材超市-龍山店 886-3-5773766
勝特力電材超市-光復店 886-3-5729570
勝特力電子(上海) 86-21-34970699
勝特力電子(深圳) 86-755-83298787
<http://www.100y.com.tw>