

Description

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

General Notes

The series 31 illuminated pushbuttons are equipped with snap-action or low-level switching elements.

For technical data see pages 2-4.

In addition to the standard contacts (gold-plated silver), silver contacts can also be ordered. The front dimensions of these units are 18 x 24 mm or 18 mm dia.

In addition to a number of illuminated pushbuttons, the customer can choose from a wide range of other units and accessories having the same front and mounting dimensions: indicators, keylock switches, flashers, segment displays, buzzers, illuminated pushbuttons with microfuse, etc.

(For keylock switches see series 51 or 61.)

Mounting

Mounting from the front through the mounting hole is assured even when the wiring has already been attached (mounting dimensions and spacing see pages 5-7).

The universal terminals of the low-level switching elements permit mounting on printed circuit boards (PCB).

These terminals are also suitable for dip soldering. For these terminals we can also supply a plug-in base which, when soldered on to the board, enables the switch to be plugged in. All rectangular switches, as well as the square and round keylock switches are secured against rotation.

Lenses

The flat or concave lenses, made of polymethyl methacrylate, are obtainable in various colours, as well as translucent or transparent.

Marking

For engravings, hot stamping and film inserts, see under "Marking" on page 29.

Illumination

Perfect illumination of the different coloured lenses is assured by midjet-grooved lamps T 1¼ (6-60 V).

If the supply voltage is above 60 V, an external dropping resistor or capacitor must be used. Multi-LED midjet-grooved lamps T 1¼ (6, 12, 24, 48 V) are available in the colours red, yellow and green.

Due to the high surface temperature, resistors may not be soldered direct to the terminals of the pushbuttons.


See under "Lamp accessories" on page 22.

Position indication

When a switch with maintained action is actuated, the lens remains in the depressed position mechanically. The state of the switch is apparent at all times from the position of the lens.

How to order

31-XXX.OXX



31-9XX.X

Lens

Example:


- Illuminated pushbutton, round, with momentary action; gold-plated silver contact; 1 switching element
31-131.025

- Lens, red
31-933.2

All dimensions in mm.

We reserve the right to modify technical data.


Snap-action switching element with soldering terminals at the sides



These elements can be stacked up to 4 elements per button.

Indicator .005/.805
Illuminated pushbuttons and keylock switches with snap-action switching elements:
– gold-plated silver contacts .025/.825
– silver contacts, suitable for over 20 V .015/.815

Snap-action switching element with axial plug-in/soldering terminals 2,8 mm



These elements cannot be stacked, hence only one element per button.

Indicator .002/.802
Illuminated pushbuttons and keylock switches with snap-action switching elements:
– gold-plated silver contacts .022/.822
– silver contacts, suitable for over 20 V .012/.812

Switching system

Self-cleaning, double-break, snap-action switching system.
Can be used as double-throw switch with one normally closed or one normally open contact per element.

Contact material

- gold-plated silver
- silver, suitable for over 20 V

Travel

3 mm

Actuating force (measured at the lens)

2–5,5 N (200–550 g), depending on the number of switching elements

Switch rating

250 VAC, 5 A (p. f. = 1)
250 VAC, 3 A (p. f. = 0,3)

Switch rating AC, p. f. 0,7 as per AC 11 (IEC 337)

Voltage V	125	250
Current A	3	2

Switch rating DC (inductive), L : R = 30 ms as per DC 11 (IEC 337)

Voltage V	24	60	110	220
Current A	2	0,7	0,2	0,1

Continuous current

Ith 5 A.
The maximum permissible current in continuous operation and at ambient temperature not exceeding the quoted maximum values.

Mechanical life

2 million operations

Rated insulation voltage

250 VAC/DC as per VDE 0110, Group B

Electric strength

2500 VAC, 50 Hz, 1 min between all terminals and earth, as per IEC 512-2-11.

Terminals

Snap-action element with soldering terminals at the sides:
Max. wire diameter: 2 wires of 0,8 mm each
Max. wire cross-section of stranded cable: 1 × 0,75 mm²
Snap-action element with axial plug-in terminals which can also be used as soldering terminals.
Plug-in terminals: 2,8 × 0,5 mm
Soldering terminal: max. wire diameter: 2 wires of 1 mm each
Max. wire cross-section of stranded cable: 2 × 0,75 mm²

Ambient temperature

–25 °C to +55 °C

For indicators and illuminated pushbuttons mounted as a block, make sure the heat can escape freely.

Storage temperature

–40 °C to +85 °C

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Switching system

This low-level switching element was designed for switching low powers in electronic circuits. The mechanism assures reliable switching of loads ranging from a few $\mu\text{A}/\mu\text{V}$ up to 100 mA/42 VAC/VDC. Single-break momentary contact, as normally open or normally closed with 4 independent points of contact.
2 momentary contacts per switching element; combination of normally open and normally closed is possible.
Special features are the long life, extremely short rebound time and stable contact resistance.

Contact material

gold-plated

Travel

3 mm

Actuating force (measured at the lens)

3–3,5 N (300–350 g)

Switch rating

10 $\mu\text{A}/100 \mu\text{V}$ to 100 mA at 42 VAC/VDC

Contact resistance

Value as new $\leq 50 \text{ m}\Omega$

Rebound time

typical $< 100 \mu\text{s}$

Mechanical life

5 million operations

Electric strength

2500 VAC, 50 Hz, 1 min between all terminals and earth, as per IEC 512-2-11.

Terminals

The universal terminals permit these units to be mounted on printed circuit boards (PCB). These terminals can also be used as soldering or plug-in terminals. For these terminals we can also supply a plug-in base which, when soldered on to the board, enables the switch to be plugged in.

Max. wire diameter: 2 wires of 0,8 mm each

Max. wire cross-section of stranded cable: $1 \times 0,75 \text{ mm}^2$

Plug-in terminals: $2,0 \times 0,5 \text{ mm}$

Ambient temperature

-25°C to $+55^\circ\text{C}$

For indicators and illuminated pushbuttons mounted as a block, make sure the heat can escape freely.

Storage temperature

-40°C to $+85^\circ\text{C}$

Shockproof (single impact, semi-sinusoidal)

15 g for 11 ms as per IEC 68-2-27

Actuator case

Made of polytherimide, self-extinguishing

Switch case




Made of polysulfon, heat-resistant and self-extinguishing

Degree of protection of front as per IEC 529

IP 40

IP 67 with sprayproof cover


Switching function (colour code)



Terminals



PCB layout conductor side



勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Resistance to vibration (sinusoidal)

10 g at 10–2000 Hz, amplitude 1,5 mm as per IEC 68-2-6

Shockproof (single impacts, semi-sinusoidal)

15 g for 11 ms as per IEC 68-2-27

Actuator case

Made of polytherimide, self-extinguishing

Switch case

DAP (diallyl phthalate), heat-resistant and self-extinguishing

Degree of protection of front as per IEC 529

IP 40

IP 67 with sprayproof cover



Approvals

- SEV 250 VAC/5 A
- CSA 300 VAC
- Lloyd's Marine Register
- UL
- Germanischer Lloyd
- NEMKO
- ÖVE
- Russian Marine Register
- VDE

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Dimensions refer to page 9

Indicator, illuminated pushbuttons

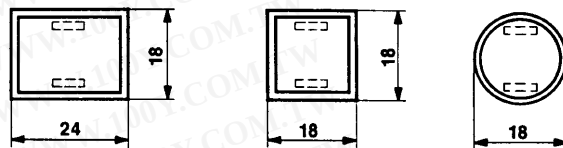
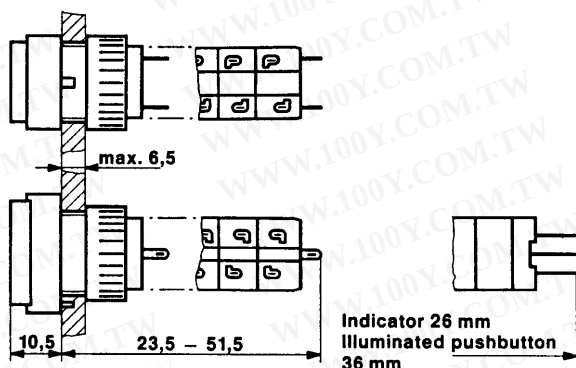


Plug-in terminals 2,8 mm

Snap-action switching element

Dimensions refer to page 10



Indicator, illuminated pushbuttons

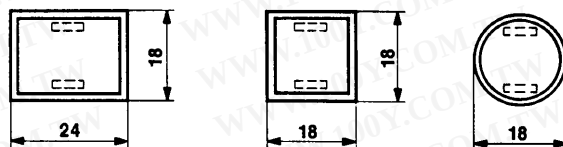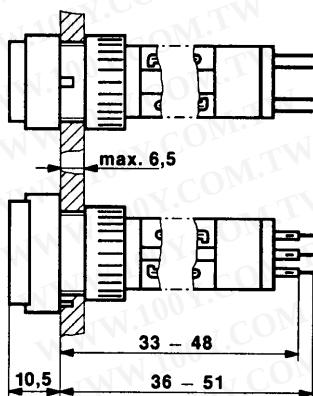

Diode matrix "M"

Dimensions refer to pages 12 + 13


Indicator, illuminated pushbuttons

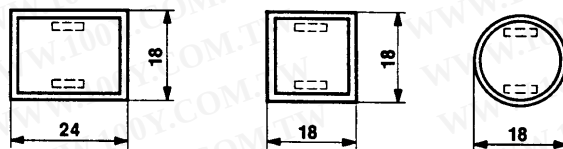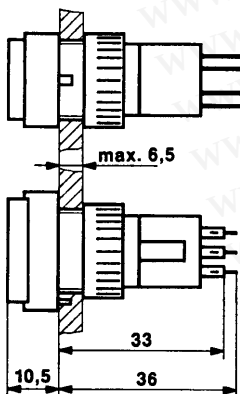

Low-level "LL"

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)


Dimensions refer to page 19

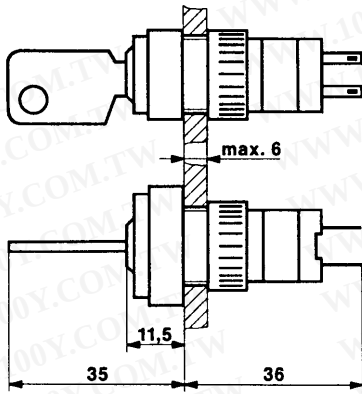


Snap-action switching element

Keylock switches


Series 32

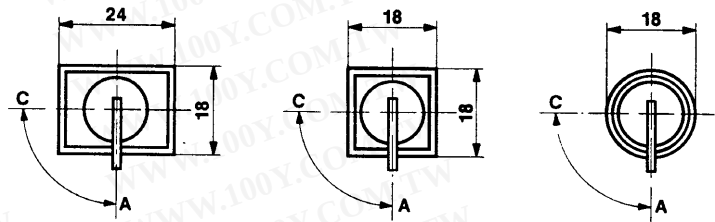


Dimensions refer to page 14

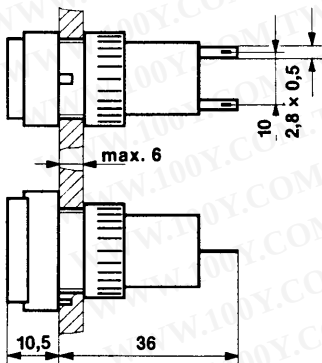


Buzzer



Dimensions refer to page 15

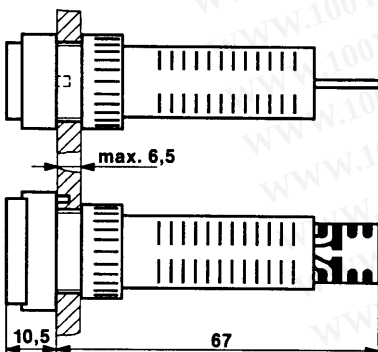


Buzzer




勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)


Dimensions refer to page 16

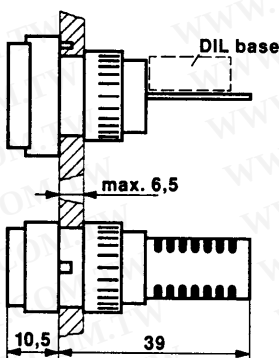


Segmental display



Dimensions refer to page 18

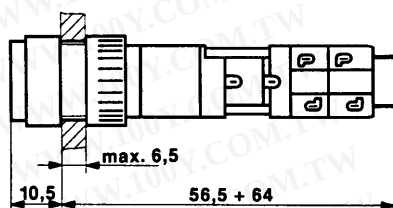


Illuminated pushbutton with microfuse




勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Indicators, illuminated pushbuttons

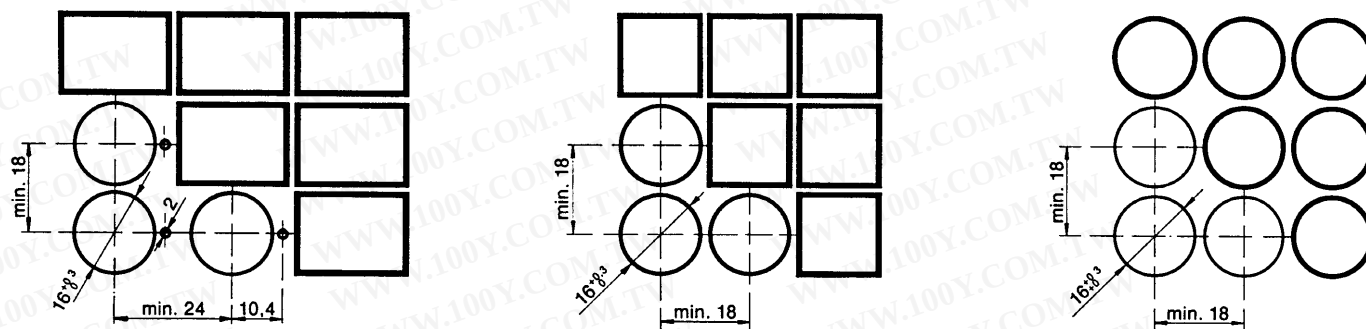

Keylock switches series 32



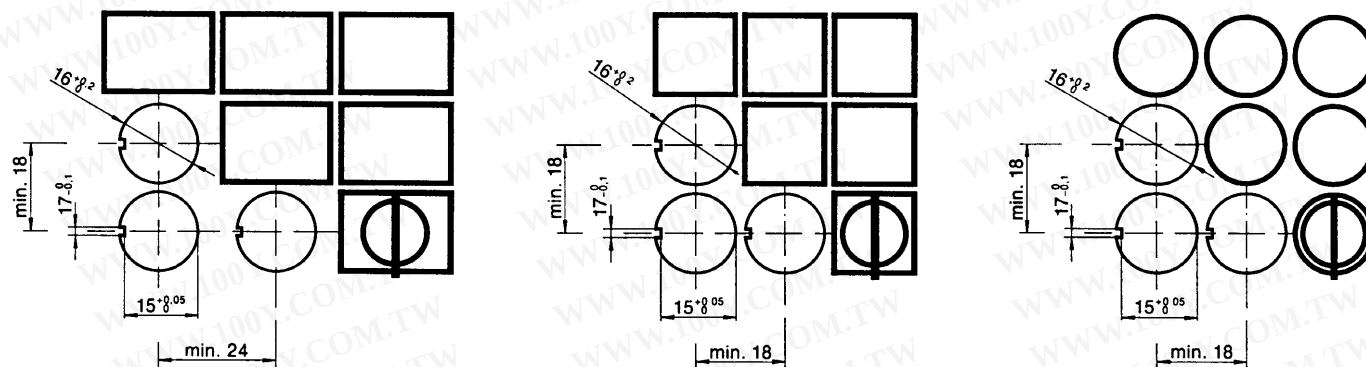


勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Indicator, Illuminated Pushbuttons with Snap-action Switching Element

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

31









250 VAC, 5 A

Dimensions see page 5

Order lenses separately
see page 20

-  18 x 24 mm
 18 x 18 mm
 18 mm

Description

Description	Momentary action	Maintained action		Type No.	Terminals			Depth mm with soldering terminals	Depth mm with plug-in terminals
					Case colour	Contact material	Terminals		
Indicator	-	-		 31-040.  31-050.  31-030.	0 0 0	0 0 0		23,5	26,5
Illuminated pushbutton 1 switching element	x	-		 31-121.  31-151.  31-131.	0 0 0			29	36
Illuminated pushbutton 2 switching elements	x	-		 31-122.  31-152.  31-132.	0 0 0		5 5 5	36,5	
Illuminated pushbutton 3 switching elements	x	-		 31-123.  31-153.  31-133.	0 0 0		5 5 5	44	
Illuminated pushbutton 4 switching elements	x	-		 31-124.  31-154.  31-134.	0 0 0		5 5 5	51,5	
Illuminated pushbutton 1 switching element	-	x		 31-261.  31-281.  31-271.	0 0 0			29	36
Illuminated pushbutton 2 switching elements	-	x		 31-262.  31-282.  31-272.	0 0 0		5 5 5	36,5	
Illuminated pushbutton 3 switching elements	-	x		 31-263.  31-283.  31-273.	0 0 0		5 5 5	44	
Illuminated pushbutton 4 switching elements	-	x		 31-264.  31-284.  31-274.	0 0 0		5 5 5	51,5	




Silver = 1, gold-plated silver = 2

Plug-in terminals 2,8 x 0,5 mm = 2, soldering terminals = 5

For lamps see page 21

Indicator, Illuminated Pushbuttons with Snap-action Switching Element and Diodes (1 N 4007)

31 M











250 VAC, 5 A

Dimensions see page 5

Order lenses separately
see page 20

- 18 x 24 mm
- 18 x 18 mm
- 18 mm




Description	Number of diodes	Momentary action	Maintained action		Type No.				Depth mm
						Case colour	Contact material	Terminals	
Indicator with diodes	1	-	-		 31-701.  31-703.  31-741.	0 0 0	0 0 0	6 6 6	36
	2	-	-		 31-702.  31-704.  31-742.	0 0 0	0 0 0	6 6 6	36
Illuminated pushbutton 1 switching element and diodes	1	x	-		 31-705.  31-709.  31-743.	0 0 0	2 2 2	9 9 9	43,5
	2	x	-		 31-706.  31-710.  31-744.	0 0 0	2 2 2	9 9 9	43,5
Illuminated pushbutton 2 switching elements and diodes	1	x	-		 31-707.  31-711.  31-745.	0 0 0	2 2 2	9 9 9	51
	2	x	-		 31-708.  31-712.  31-746.	0 0 0	2 2 2	9 9 9	51
Illuminated pushbutton 1 switching element and diodes	1	-	x		 31-713.  31-717.  31-747.	0 0 0	2 2 2	9 9 9	43,5
	2	-	x		 31-714.  31-718.  31-748.	0 0 0	2 2 2	9 9 9	43,5
Illuminated pushbutton 2 switching elements and diodes	1	-	x		 31-715.  31-719.  31-749.	0 0 0	2 2 2	9 9 9	51
	2	-	x		 31-716.  31-720.  31-750.	0 0 0	2 2 2	9 9 9	51

For lamps see page 21

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Indicator, Illuminated Pushbuttons with Low-level Switching Element

31 LL



Dimensions see page 5

42 VAC/VDC, 100 mA

Order lenses separately
see page 20

-  18 x 24 mm
-  18 x 18 mm
-  18 mm

Description

Description	Momentary action	Maintained action		Type No.	Case colour	Contact material	Terminals	Depth mm
Indicator (The total length is the same as that of the illuminated pushbutton)	-	-		 31-041.  31-051.  31-031.	0	0	6	36
Illuminated pushbutton 1 normally open contact	x	-	 	 31-425.  31-455.  31-435.	0	3	6	36
Illuminated pushbutton 2 normally open contacts	x	-	 	 31-421.  31-451.  31-431.	0	3	6	36
Illuminated pushbutton 1 normally closed contact	x	-	 	 31-426.  31-456.  31-436.	0	3	6	36
Illuminated pushbutton 2 normally closed contacts	x	-	 	 31-422.  31-452.  31-432.	0	3	6	36
Illuminated pushbutton 1 normally closed contact 1 normally open contact	x	-	 	 31-423.  31-453.  31-433.	0	3	6	36

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

For lamps see page 21

With indicators and illuminated pushbuttons equipped with diodes, the user is able to perform a lamp check

Applications:

Lamp check


Lamp check with blocking diodes

Alarm circuit from fault annunciating system

Lamp check and alarm circuit

Lamp check and alarm circuit with only one diode and AC voltage

or wire an alarm circuit simply with a considerable saving of space.



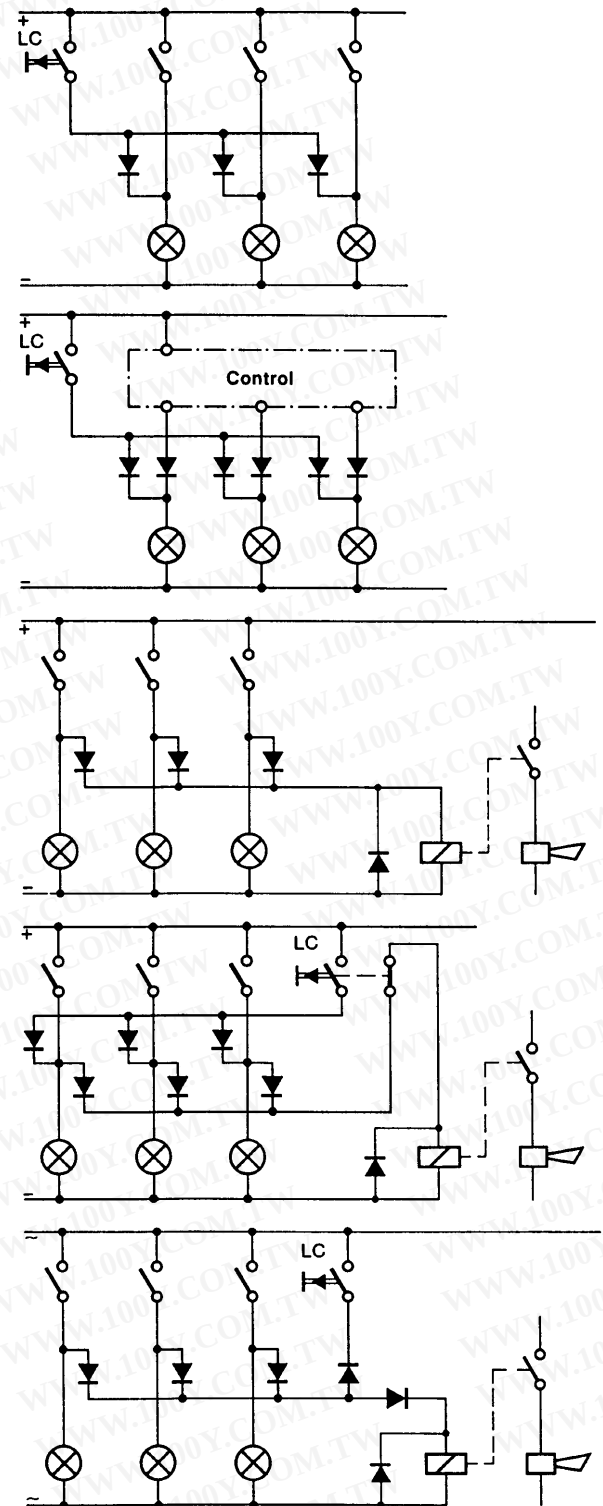


LC = Lamp check

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Indicator, Illuminated Pushbuttons with Low-level Switching Element

31 LL



Dimensions see page 5

42 VAC/VDC, 100 mA

Order lenses separately
see page 20


-  18 x 24 mm
-  18 x 18 mm
-  18 mm

Description

Description	Momentary action	Maintained action		Type No.	Case colour	Contact material	Terminals	Depth mm
Illuminated pushbutton 1 normally open contact	-	x		 □ 31-465. □ 31-485. ○ 31-475.	0 0 0	3 3 3	6 6 6	36
Illuminated pushbutton 2 normally open contacts	-	x		 □ 31-461. □ 31-481. ○ 31-471.	0 0 0	3 3 3	6 6 6	36
Illuminated pushbutton 1 normally closed contact	-	x		 □ 31-466. □ 31-486. ○ 31-476.	0 0 0	3 3 3	6 6 6	36
Illuminated pushbutton 2 normally closed contacts	-	x		 □ 31-462. □ 31-482. ○ 31-472.	0 0 0	3 3 3	6 6 6	36
Illuminated pushbutton 1 normally closed contact 1 normally open contact	-	x		 □ 31-463. □ 31-483. ○ 31-473.	0 0 0	3 3 3	6 6 6	36

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

For lamps see page 21



Dimensions see page 6

18 × 24 mm

Description			Type No.	Depth mm
Buzzer, continuous and intermittent tone	10-26 VDC	(-) a — b (+) Continuous tone (+) a b (-) Intermittent tone	31-801.002	36

Technical data

Acoustic data

Sound pressure 95 db ± 5 at a distance of 0,1 m
Sound frequency approx. 2,0 kHz
Interval frequency 4 Hz

Electrical data

Operating voltage: 10-26 VDC
Working current: ≤ 30 mA


Mechanical data

Dimensions of front: 18 × 24 mm
Mounting hole: 16 mm dia.
Back panel depth: 36 mm
Terminals: Plug-in terminals 2,8 × 0,5 mm
Degree of protection: IP 40 as per IEC 529

Materials

Case: polyetherimide, self-extinguishing
Storage and operating temperature: -25 °C to +55 °C

Application




Depending on how the terminals are connected, the buzzer can operate with a continuous tone a(-) b(+) or with intermittent tone a(+) b(-).

勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Note: For mounting on PCB use plug-in base 31-942.

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

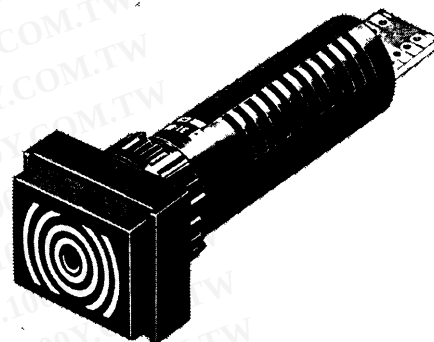


Dimensions see page 6

18 × 24 mm

Description

Buzzer, continuous and intermittent tone
 10-55 VAC
 10-75 VDC



Type No.

31-810.005

Depth mm

67

Technical data


Sound pressure

90 db ± 5 at a distance of 0,1 m
 Volume variable with a 1 MΩ/potentiometer or corresponding fixed resistor.


Frequency (tone)

appr. 2,8 kHz

Supply voltage I




Supply voltage II




Current consumption

typical 25 mA AC
 typical 15 mA DC


Typical applications




1. Supply voltage I
 Continuous tone
 U = 10-35 VAC
 U = 10-50 VDC



2. Supply voltage II
 Continuous tone
 U = 35-55 VAC
 U = 35-75 VDC



3. Intermittent tone
 Interval appr. 3 Hz



4. Volume control

Ambient temperature

-25 °C to +55 °C

Storage temperature

-40 °C to +85 °C


System

- Contactless electronic buzzer
- With IC oscillator

Features

- Low power consumption
- Wide voltage range
- No mechanical contacts
- Rugged construction




勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)



Dimensions see page 7

18 × 24 mm

Description	Connections	Type No.	Case colour	Contact material	Terminals	Depth mm
This segmental display contains a seven-segment GA-P element including decimal point with common anode. It should be energized with current limitation in 7-segment code (e.g. switch, semiconductor driver).		31-022.	0	0	5	39
This segmental display contains a seven-segment GA-P element including decimal point with common cathode. It should be energized with current limitation in 7-segment code (e.g. switch, semiconductor driver).		31-023.	0	0	5	39









Segmental Display (7-segment)

31 D


Technical data $T_a = 25^\circ\text{C}$

	symbol	min.	typ.	max.	unit	conditions
Continuous current	I_F			15	mA	per segment, Dp
Pulse current	I_{FP}			80	mA	$P_W = 1\text{ ms}$, $DF = 1/10$
Forward voltage	V_F	1.8	1.9	2.4	V	$I_F = 15\text{ mA}$
Blocking voltage	BV_R			3	V	$I_R = 5.0\text{ }\mu\text{A max.}$
Light intensity	I_V	0.04	0.11		mcd	$I_F = 5\text{ mA}$
Power loss	P_D			350	mW	7 Segm. + Dp
Temp. coeff. of V_F	TC_{VF}		-2		mV/ $^\circ\text{C}$	
Ambient temperature	T_a	-20		+75	$^\circ\text{C}$	

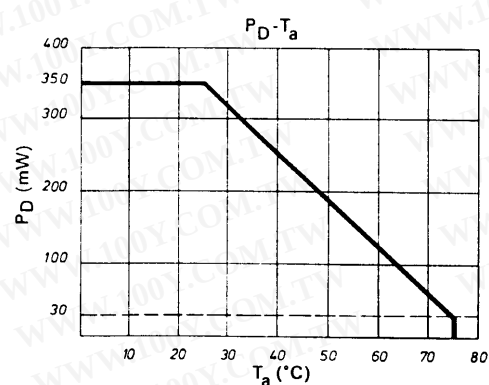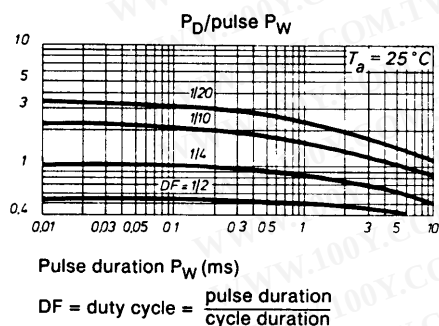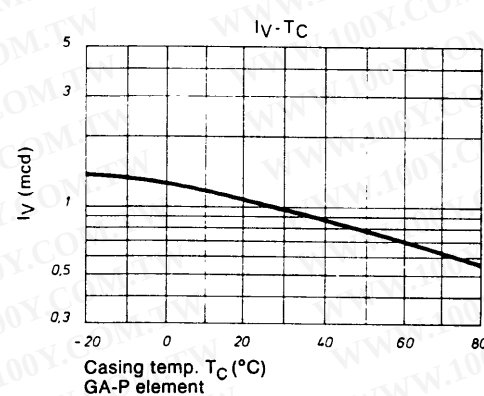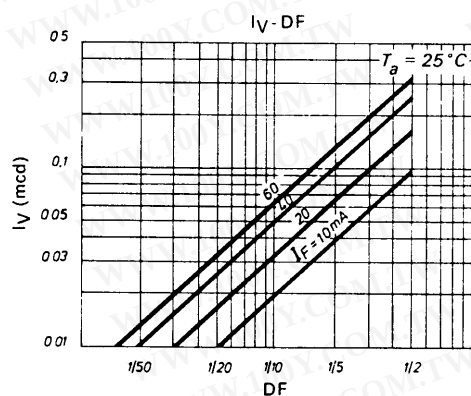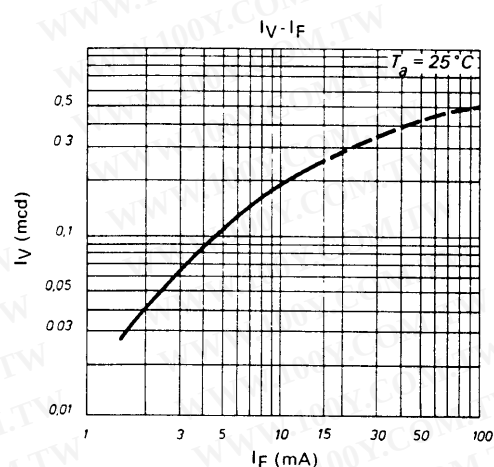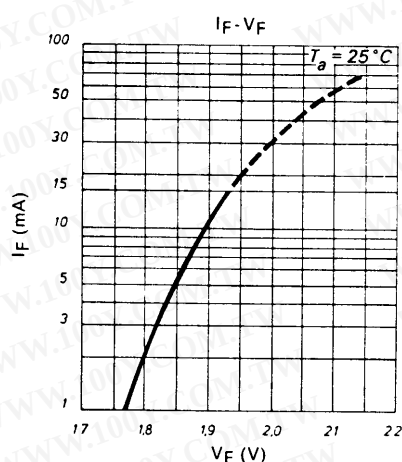

Illuminated Pushbutton with Microfuse and Snap-action Switching Element

31

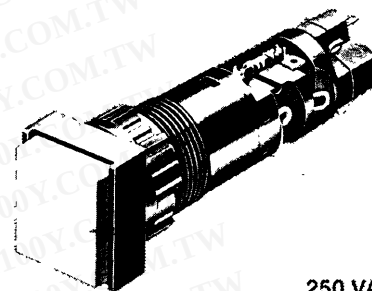

250 VAC, 5 A

Dimensions see page 7

Order lenses separately
see page 20

□ 18 x 18 mm

Description	Lamp voltage	Maintained action	Type No.	Case colour	Contact material	Terminals	Depth mm
Separate circuits between microfuse and lamp Illuminated pushbutton 1 switching element	6- 60 V	x	31-201.	0	2	5	56,5
Illuminated pushbutton 2 switching elements	6- 60 V	x	31-202.	0	2	5	64
Operating indicator Lamp goes out when fuse blows Illuminated pushbutton 1 switching element	6- 60 V	x	31-207.	0	2	5	56,5
Illuminated pushbutton 2 switching elements	6- 60 V	x	31-208.	0	2	5	64
Interruption indicator Lamp lights when fuse blows Illuminated pushbutton 1 switching element	6- 60 V	x	31-213.	0	2	5	56,5
Illuminated pushbutton 2 switching elements	6- 60 V	x	31-214.	0	2	5	64

Technical data


- Microfuse: 5 dia. x 20 mm
- Rated voltage: max. 250 V
- Rated current: max. 6,3 A fast

For lamps see page 21

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Illuminated Pushbutton with Microfuse and Snap-action Switching Element

31

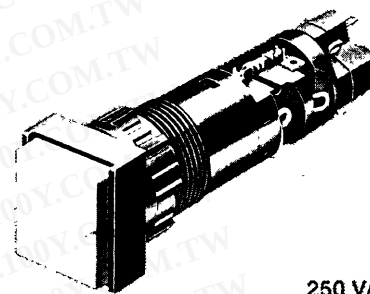

250 VAC, 5 A

Dimensions see page 7

Order lenses separately
see page 20

18 × 18 mm

Description	Lamp voltage	Maintained action	Type No.	Case colour	Contact material	Terminals	Depth mm
Separate circuits between microfuse and lamp Illuminated pushbutton 1 switching element	6– 60 V	x	31-201.	0	2	5	56,5
Illuminated pushbutton 2 switching elements	6– 60 V	x	31-202.	0	2	5	64
Operating indicator Lamp goes out when fuse blows Illuminated pushbutton 1 switching element	6– 60 V	x	31-207.	0	2	5	56,5
Illuminated pushbutton 2 switching elements	6– 60 V	x	31-208.	0	2	5	64
Interruption indicator Lamp lights when fuse blows Illuminated pushbutton 1 switching element	6– 60 V	x	31-213.	0	2	5	56,5
Illuminated pushbutton 2 switching elements	6– 60 V	x	31-214.	0	2	5	64

Technical data

- Microfuse: 5 dia. x 20 mm
- Rated voltage: max. 250 V
- Rated current: max. 6,3 A fast


For lamps see page 21

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

eao

Keylock Switches (IP 40) with Snap-action Switching Element

32

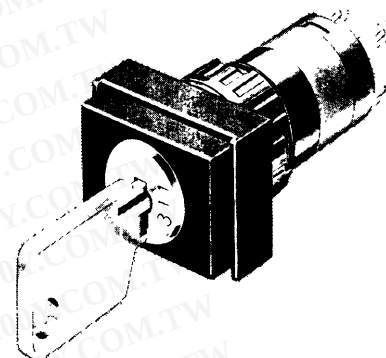


Dimensions see page 6

-  18 x 24 mm
-  18 x 18 mm
-  18 mm

Description

Keylock switch
Position A basic position
Position C maintained action
1 switching element



A C



Type No.

-  32-195.
-  32-155.
-  32-135.

Case colour

Contact material


Terminals

Depth mm

Keylock switch
Position A basic position
Position C maintained action
1 switching element



A



-  32-295.
-  32-255.
-  32-235.

0 1 2

0 1 2


0 1 2

36

Keylock switch
Position A basic position
Position C maintained action
1 switching element



C



-  32-395.
-  32-355.
-  32-335.

0 1 2

0 1 2

0 1 2

36

Silver = 1

Plug-in terminals 2,8 x 0,5 mm = 2





勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Description	Colour	 15,2 x 21,2 mm	 15,2 x 15,2 mm	 15,8 mm	
	● opaque	Type No.	Type No.	Type No.	
Flat, translucent lens with translucent support	● black	31-901.0	31-951.0	31-931.0	
	red	31-901.2	31-951.2	31-931.2	
	orange	31-901.3	31-951.3	31-931.3	
	yellow	31-901.4	31-951.4	31-931.4	
	green	31-901.5	31-951.5	31-931.5	
	blue	31-901.6	31-951.6	31-931.6	
	● grey	31-901.8	31-951.8	31-931.8	
	white	31-901.9	31-951.9	31-931.9	
Concave, translucent lens with translucent support	● black	31-902.0	31-952.0		
	red	31-902.2	31-952.2		
	orange	31-902.3	31-952.3		
	yellow	31-902.4	31-952.4		
	green	31-902.5	31-952.5		
	blue	31-902.6	31-952.6		
	● grey	31-902.8	31-952.8		
	white	31-902.9	31-952.9		
Flat, transparent lens with translucent support (for film insert and LED)	smoked	31-903.1	31-953.1	31-933.1	
	red	31-903.2	31-953.2	31-933.2	
	orange	31-903.3	31-953.3	31-933.3	
	yellow	31-903.4	31-953.4	31-933.4	
	green	31-903.5	31-953.5	31-933.5	
	blue	31-903.6	31-953.6	31-933.6	
	clear	31-903.7	31-953.7	31-933.7	
Concave, transparent lens with translucent support (for film insert and LED)	red	31-904.2	31-954.2		
	orange	31-904.3	31-954.3		
	yellow	31-904.4	31-954.4		
	green	31-904.5	31-954.5		
	blue	31-904.6	31-954.6		
	clear	31-904.7	31-954.7		
Flat, transparent lens with transparent support	red	31-905.2	31-955.2	31-935.2	
	yellow	31-905.4	31-955.4	31-935.4	
	green	31-905.5	31-955.5	31-935.5	
	clear	31-905.7	31-955.7	31-935.7	
Concave, transparent lens with transparent support	red	31-906.2	31-956.2		
	yellow	31-906.4	31-956.4		
	green	31-906.5	31-956.5		
	clear	31-906.7	31-956.7		








勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Description	Lamp voltage	Power consumption	Type No.	
Filament lamp midget-grooved T1¼	6,3 V	200 mA	31-963.0	
	14 V	80 mA	31-963.1	
	28 V	40 mA	31-963.2	
	36 V	30 mA	31-963.5	
	48 V	25 mA	31-963.3	
	60 V	20 mA	31-963.4	
Multi-LED midget-grooved T1¼ (6 chips) with built-in blocking diode Recommended: transparent lens with translucent support should be used (Lamp connection a = cathode)	6 V	45 mA red	31-968.02	
		yellow	31-968.04	
		green	31-968.05	
	12 V	25 mA red	31-968.12	
		yellow	31-968.14	
		green	31-968.15	
	24 V	12,5 mA red	31-968.22	
		yellow	31-968.24	
		green	31-968.25	
	48 V	12,5 mA red	31-968.42	
		yellow	31-968.44	
		green	31-968.45	

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Description		Type No.	
Series resistor to reduce the lamp voltage. Use with 60 V/20 mA lamp rating	110 V 2,7 kΩ 125 V 3,3 kΩ 145 V 4,7 kΩ 230-240 V 10 kΩ	02-904.0 02-904.1 02-904.3 02-904.7	
Capacitor to reduce the lamp voltage. Use with 60 V/20 mA lamp rating, 50 Hz	230 V 0,27 μF	02-917.0	
Empty terminal plate for wiring resistors or capacitors	5 spaces 10 spaces 15 spaces 20 spaces	02-912.1 02-912.2 02-912.3 02-912.4	
Terminal plate fitted with resistors or capacitors	2,7 kΩ 110/60 V 5 spaces 10 spaces 15 spaces 20 spaces 3,3 kΩ 125/60 V 5 spaces 10 spaces 15 spaces 20 spaces 10 kΩ 230-240/60 V 5 spaces 10 spaces 15 spaces 20 spaces 0,27 μF 230/60 V 5 spaces 10 spaces 15 spaces 20 spaces	02-913.10 02-913.20 02-913.30 02-913.40 02-913.11 02-913.21 02-913.31 02-913.41 02-913.17 02-913.27 02-913.37 02-913.47 02-914.10 02-914.20 02-914.30 02-914.40	


勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

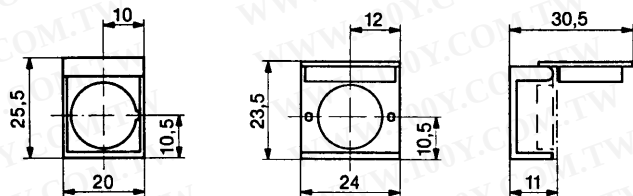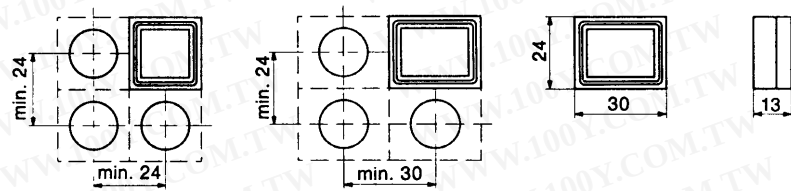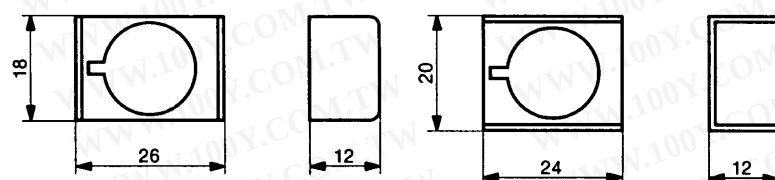Description	Type No.										
Hinged, transparent protective cover with means of sealing (to prevent unauthorized operation of the lens) 	square 31-920 rectangular 01-925										
Two-part sprayproof cover enabling the lamp to be replaced without problems (protection IP 67) 	square membrane of PVC 31-923 rectangular membrane of silicone 31-924.2										
Protective guard, matt chromium-plated (with the narrow ends bent upwards) (with the broad sides bent upwards) 	01-926 01-927										
Blind plugs <table border="1"> <tr> <td>rectangular 18 × 24 mm</td><td>black grey</td><td>01-947.0 01-947.8</td></tr> <tr> <td>square 18 × 18 mm</td><td>black grey</td><td>01-948.0 01-948.8</td></tr> <tr> <td>circular 18 mm dia.</td><td>black grey</td><td>01-949.0 01-949.8</td></tr> </table>	rectangular 18 × 24 mm	black grey	01-947.0 01-947.8	square 18 × 18 mm	black grey	01-948.0 01-948.8	circular 18 mm dia.	black grey	01-949.0 01-949.8		
rectangular 18 × 24 mm	black grey	01-947.0 01-947.8									
square 18 × 18 mm	black grey	01-948.0 01-948.8									
circular 18 mm dia.	black grey	01-949.0 01-949.8									

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Description



AML adaptor
for American
panel cutout



square


Type No.

31-948

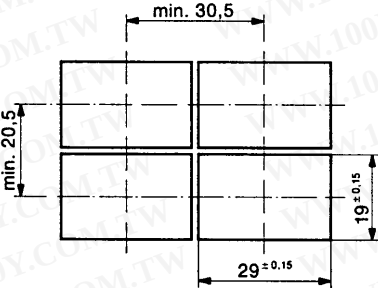


rectangular

31-949




Insulation socket for axial snap-action switching element 2,8 mm,
to cover the plug-in terminals

01-928



Terminal cover for snap-action switching element

01-929




勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)


Description

Type No.

Axial PCB plug-in base for low-level switching elements
16,4 mm dia. x 9,8 mm high

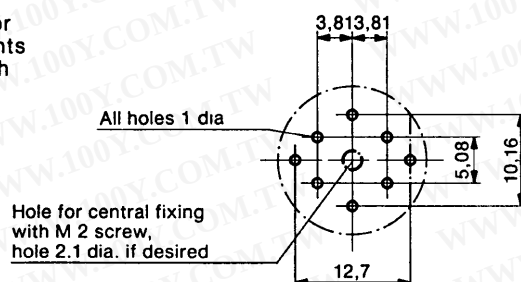


31-940




Right-angled PCB plug-in base for low-level switching elements
17,9 mm square x 8,4 mm high


The withdrawable mounting pins allow the distance between the PCB plug-in base and the board to be varied by up to 3 mm

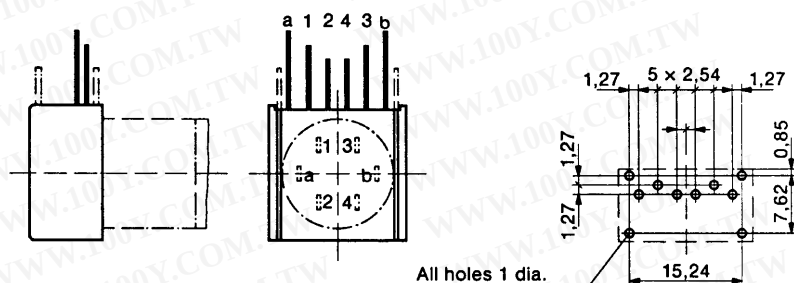


31-941

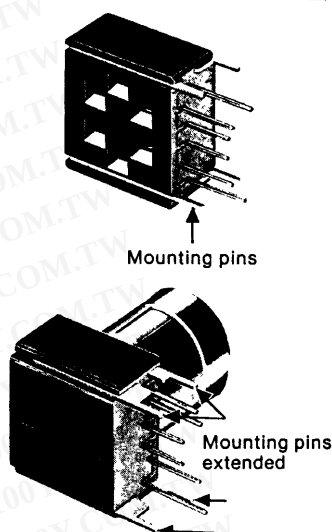

Axial PCB plug-in base for axial snap-action switching element 2,8 mm
17,8 mm dia. x 9,8 mm high

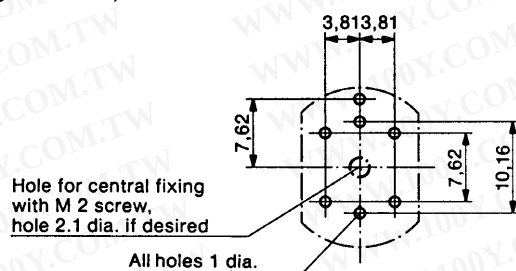

31-942




Plug-In adapter with screw connection for switches with plug-in terminal 2,8 x 0,5 mm

The screw connections can be applied for 2 wires each 1 mm Ø or 2 standard wires each 0,75 mm².

The use of the plug-in adapter increases the back panel depth by 14 mm compared to the standard switch requiring a new spacing dimension with the adapter of 24 x 24 mm.



31-943.0



勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Description	Type No.	
Connector for low-level switching elements Insulation socket for connector 31-945	31-945 31-928	
Connector for axial snap-action switching element 2,8 mm Insulation socket for connector 31-946	31-946 31-929	

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Description	Type No.	
Lens remover	02-905	
Lamp remover	02-906	
LED remover	51-996	
Dressing tool used as aid to aligning buttons	01-906	
Mounting tool for tightening (or loosening) fixing nuts	01-907	

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Description	Type No.	
Metal fixing ring (especially for keylock switches)	31-991	
Adhesive label for illuminated pushbuttons with microfuse 18 mm dia. x 24 mm	31-999	

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

1. Engraving

Typefaces

In addition to the most commonly used world languages (see DIN 1451) with close spacing, the following typefaces are available: Scandinavian, Slavian, Greek, Russian.

Coloured filling of engraving

Red, blue and black lenses have the engraving filled with white. Lenses of other colours have the engraving filled with black.

Symbols

A list of the symbols available can be supplied on request.

2. Hot stamping


For large batches it is worth while to have the lettering produced by hot stamping.

Typefaces

For letters and figures, typefaces with 2,5 mm, 3 mm and 4 mm are available.

Symbols

A list of the symbols available can be supplied on request.



Important!

Before engraving, check the position of the illuminated pushbutton or indicator.

Height of letters mm	Thickness of letters mm	Horizontal mounting			Vertical mounting			Circular mounting			Square mounting		
		Number of lines	Number of letters per line	Number of letters per line	Number of lines	Number of letters per line	Number of letters per line	Number of lines	Number of letters per line	Number of letters per line	Number of lines	Number of letters per line	Number of letters per line
h	s		(caps)	(small)		(caps)	(small)		(caps)	(small)		(caps)	(small)
2,5	0,4	4	11	12	5	7-8	8	3	6	6	4	7-8	8
3	0,4	3	9-10	10-11	4	6-7	7	2	5	6	3	6-7	7
4	0,5	2	7	7-8	3	4-5	5	2	3	4	2	4-5	5
5	0,5	2	5-6	6	2	3-4	4	1	2	3	2	3-4	4
6	0,6	1	4-5	5	2	3	3-4	1	2	3	1	3	3-4
8	0,6	1	3-4	3-4	1	2-3	2-3	1	2	2	1	2-3	2-3

3. Film inserts

Instead of using engraving, the lenses can be fitted with transparent film inserts.

For this purpose, though, it is advisable to use transparent lenses. When a smoked lens is used, the lettering does not become visible until the lamp lights.

To insert the film, the feet of the lens support have to be pushed together far enough to enable the lens to be lifted off easily.


Film dimensions

max. 12,7 x 18,7 mm ☒

12,7 x 12,7 mm ☒

12,8 mm ☒

Film thickness 0,2 mm



勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)