


TN2 Ø22mm/Ø25mm , TN3 Ø30mm 選擇開關

本系列開關之接點座採用直接式接點座，裝配尺寸見 G3 頁，燈泡種類與規格同直接式照光按鈕開關，見 G6 頁。

● 型號說明

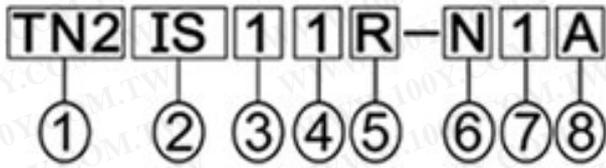

項次	代號	說明
1. 固定孔徑	TN2	Ø22mm/Ø25mm
	TN3	Ø30mm
2. 型式	IS	標準選擇
	IH	長柄選擇
3. 動作方式	1	三段 90°x2
	2	二段 90°
	3	二段 90°復歸
	4	三段 45°x2
	5	三段 45°x2 右邊復歸
	6	三段 45°x2 左邊復歸
	7	三段 45°x2 二邊復歸

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

項次	代號	說明	
4. 電壓	1	110VAC(霓虹 LED 燈泡)	
	2	220VAC(霓虹 LED 燈泡)	
	3	380VAC(霓虹燈泡)	
	4	440VAC(霓虹燈泡)	
	5	6VAC/DC(鎢絲 LED 燈泡)	
	6	18VAC/DC(鎢絲燈泡)	
	7	24VAC/DC(鎢絲 LED 燈泡)	
	8	30VAC/DC(鎢絲 LED 燈泡)	
	9	12VAC/DC((鎢絲燈泡)	
5. 顏色	R	紅	
	G	綠	
	O	橙	
	W	白	
	BL	藍	
	YG	黃綠(LED 專用)	
6. 燈泡種類	I	鎢絲燈泡	
	N	霓虹燈泡	
	L	LED 燈泡	
7. 接點數目	1	1 組	
	2	2 組	
	3	3 組	
	4	4 組	
8. 接點種類		二段	三段
	A	1a	—
	B	1b	—
	C	1a1b	1a 0 1a
	AB	1a+1b	—

● 外觀尺寸

TN2IS



TN3IS



TN2IH



TN3IH



勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

● 直接式照光選擇開關二段接點圖

型式	TN2-I1A	TN2-I1B	TN2-I1C	TN2-I2A	TN2-I2B	TN2-I2C																																																						
接點	1a	1b	1a1b	2a	2b	2a2b																																																						
接點圖	<table border="1" style="margin-top: 10px;"> <tr><td>接點</td><td>0</td><td>1</td></tr> <tr><td>3-4</td><td></td><td>X</td></tr> </table>	接點	0	1	3-4		X	<table border="1" style="margin-top: 10px;"> <tr><td>接點</td><td>0</td><td>1</td></tr> <tr><td>1-2</td><td>X</td><td></td></tr> </table>	接點	0	1	1-2	X		<table border="1" style="margin-top: 10px;"> <tr><td>接點</td><td>0</td><td>1</td></tr> <tr><td>1-2</td><td>X</td><td></td></tr> <tr><td>3-4</td><td></td><td>X</td></tr> </table>	接點	0	1	1-2	X		3-4		X	<table border="1" style="margin-top: 10px;"> <tr><td>接點</td><td>0</td><td>1</td></tr> <tr><td>3-4</td><td></td><td>X</td></tr> <tr><td>3-4</td><td></td><td>X</td></tr> </table>	接點	0	1	3-4		X	3-4		X	<table border="1" style="margin-top: 10px;"> <tr><td>接點</td><td>0</td><td>1</td></tr> <tr><td>1-2</td><td>X</td><td></td></tr> <tr><td>1-2</td><td>X</td><td></td></tr> </table>	接點	0	1	1-2	X		1-2	X		<table border="1" style="margin-top: 10px;"> <tr><td>接點</td><td>0</td><td>1</td></tr> <tr><td>1-2</td><td>X</td><td></td></tr> <tr><td>3-4</td><td></td><td>X</td></tr> <tr><td>1-2</td><td>X</td><td></td></tr> <tr><td>3-4</td><td></td><td>X</td></tr> </table>	接點	0	1	1-2	X		3-4		X	1-2	X		3-4		X
接點	0	1																																																										
3-4		X																																																										
接點	0	1																																																										
1-2	X																																																											
接點	0	1																																																										
1-2	X																																																											
3-4		X																																																										
接點	0	1																																																										
3-4		X																																																										
3-4		X																																																										
接點	0	1																																																										
1-2	X																																																											
1-2	X																																																											
接點	0	1																																																										
1-2	X																																																											
3-4		X																																																										
1-2	X																																																											
3-4		X																																																										

● 直接式照光選擇開關三段接點圖

型式	TN2-I2A	TN2-I4A																																
接點	1a 0 1 a	2a 0 2a																																
接點圖	<table border="1" style="margin-top: 10px;"> <tr><td>接點</td><td>1</td><td>0</td><td>2</td></tr> <tr><td>3-4</td><td>X</td><td></td><td></td></tr> <tr><td>3-4</td><td></td><td></td><td>X</td></tr> </table>	接點	1	0	2	3-4	X			3-4			X	<table border="1" style="margin-top: 10px;"> <tr><td>接點</td><td>1</td><td>0</td><td>2</td></tr> <tr><td>3-4</td><td>X</td><td></td><td></td></tr> <tr><td>3-4</td><td>X</td><td></td><td></td></tr> <tr><td>3-4</td><td></td><td></td><td>X</td></tr> <tr><td>3-4</td><td></td><td></td><td>X</td></tr> </table>	接點	1	0	2	3-4	X			3-4	X			3-4			X	3-4			X
接點	1	0	2																															
3-4	X																																	
3-4			X																															
接點	1	0	2																															
3-4	X																																	
3-4	X																																	
3-4			X																															
3-4			X																															