


勝特力電材超市-龍山店 886-3-5773766
 勝特力電材超市-光復店 886-3-5729570
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
<http://www.100y.com.tw>

AD-N3B8

N Plug To BNC Jack
10GHz VSWR 1.2

50Ω

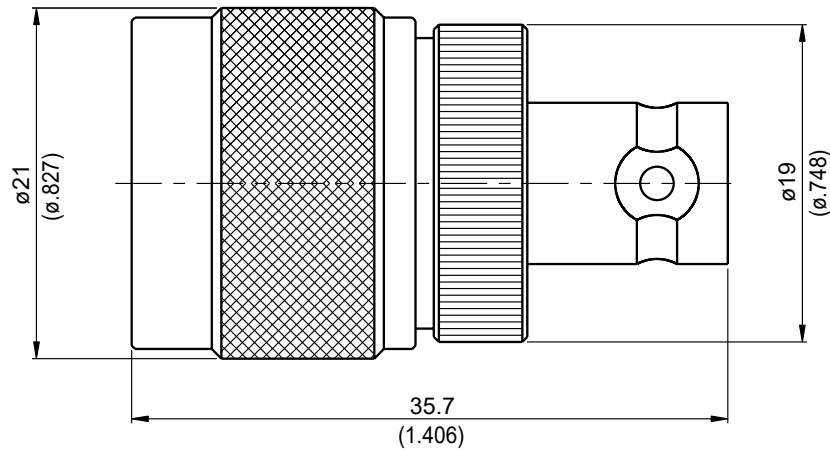

Parts	Material	Plating (Micro-inch)
Insulator	Teflon	
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Contact Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Retainer Ring	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Gasket	Silicon	
Coupling Nut(N)	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Contact Pin	Phosphor Bronze	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20

Weight: 40.3 g


This part number complies with RoHS.

Notice: JYBAO reserves the right to make modifications deemed appropriate.

AD-N3B8	N Plug To BNC Jack 10GHz VSWR 1.2	
<div data-bbox="129 344 531 389" style="border: 1px solid black; padding: 2px;">Interface</div> Standard	<div data-bbox="778 344 1123 389" style="border: 1px solid black; padding: 2px;">N</div> MIL-STD-348B	<div data-bbox="1123 344 1481 389" style="border: 1px solid black; padding: 2px;">BNC</div> MIL-STD-348B
<div data-bbox="129 562 531 607" style="border: 1px solid black; padding: 2px;">Electrical Data</div> Impedance Frequency Range VSWR Insertion Loss Insulation Resistance Dielectric Withstanding Voltage (at sea level) Working Voltage (at sea level)	50Ω DC To 10GHz ≤ 1.2 (DC To 10GHz) ≤ 0.06 x √f(GHz) dB ≥ 5000MΩ 1500 V rms 500 V rms	
<div data-bbox="129 1059 531 1104" style="border: 1px solid black; padding: 2px;">Mechanical Data</div> Recommended Coupling Nut Torque Coupling Proof Torque Coupling Nut Retention Force Contact Captivation-axial Durability (mating)	<div data-bbox="778 1115 1123 1160" style="border: 1px solid black; padding: 2px;">N</div> 6 to 10 in-lbs 15 in-lbs ≥ 101.2 lbs ≥ 6.3 lbs ≥ 500	<div data-bbox="1123 1115 1481 1160" style="border: 1px solid black; padding: 2px;">BNC</div> 0.6 to 2.5 in-lbs NA NA ≥ 6.1 lbs ≥ 500
<div data-bbox="129 1507 531 1552" style="border: 1px solid black; padding: 2px;">Environmental Data</div> Temperature Range Thermal Shock Moisture Resistance Corrosion RoHS	-65°C to +165°C MIL-STD-202, Method 107, Condition B MIL-STD-202, Method 206 MIL-STD-202, Method 101, Condition B Compliant	

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

AD-N3B8

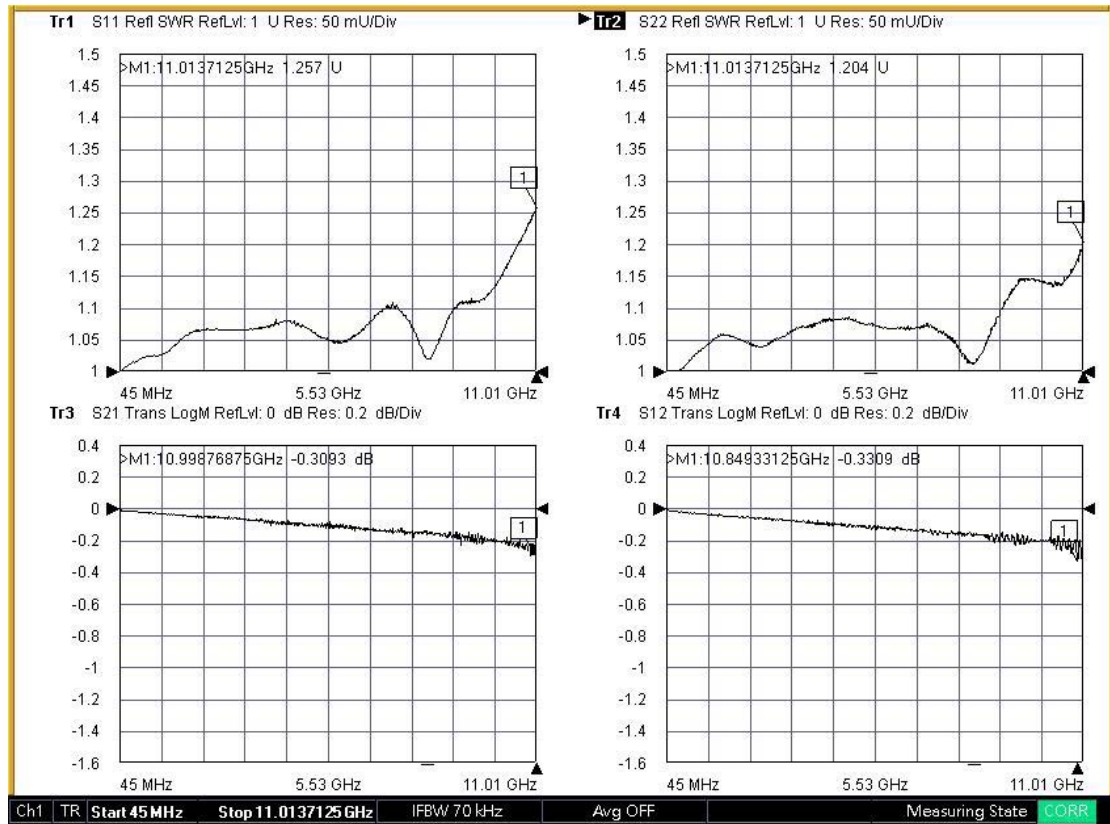

Note: S11/S12/S21/S22 plots shown represent IL and VSWR of two adaptors tested. To extract IL of a single adaptor divide IL measured by two.

勝特力電材超市-龍山店 886-3-5773766
勝特力電材超市-光復店 886-3-5729570
勝特力電子(上海) 86-21-34970699
勝特力電子(深圳) 86-755-83298787
<http://www.100y.com.tw>