


ADS-A3T8-18-1.15

SMA Plug To TNC Jack  
18GHz VSWR 1.15

50Ω


勝特力電材超市-龍山店 886-3-5773766  
 勝特力電材超市-光復店 886-3-5729570  
 勝特力電子(上海) 86-21-34970699  
 勝特力電子(深圳) 86-755-83298787  
<http://www.100y.com.tw>

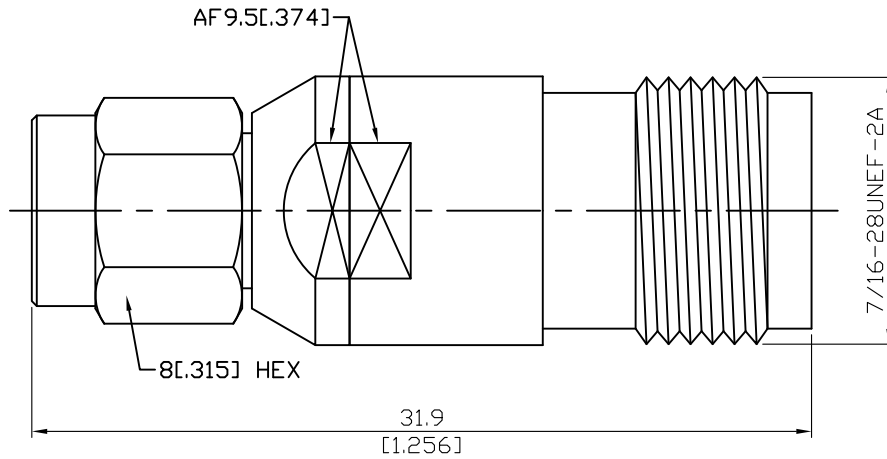

Parts	Material	Plating ( Micro-inch )
Retainer Ring	Beryllium Copper	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Gasket	Silicone	
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Insulator	Teflon	
Body	Stainless Steel	Passivated
Coupling Nut	Stainless Steel	Passivated

ADS-A3T8-18-1.15	SMA Plug To TNC Jack 18GHz VSWR 1.15																																		
<table border="1"> <tr> <td data-bbox="113 324 531 392">Interface</td> <td data-bbox="531 324 778 392"></td> <td data-bbox="778 324 1123 392">SMA</td> <td data-bbox="1123 324 1479 392">TNC</td> </tr> <tr> <td data-bbox="113 392 531 443">Standard</td> <td data-bbox="531 392 778 443"></td> <td data-bbox="778 392 1123 443">MIL-STD-348B</td> <td data-bbox="1123 392 1479 443">MIL-STD-348B</td> </tr> <tr> <td data-bbox="113 443 531 584">Mechanically compatible with</td> <td data-bbox="531 443 778 584"></td> <td data-bbox="778 443 1123 584">2.92 &amp; 3.5</td> <td data-bbox="1123 443 1479 584"></td> </tr> </table>	Interface		SMA	TNC	Standard		MIL-STD-348B	MIL-STD-348B	Mechanically compatible with		2.92 & 3.5																								
Interface		SMA	TNC																																
Standard		MIL-STD-348B	MIL-STD-348B																																
Mechanically compatible with		2.92 & 3.5																																	
<table border="1"> <tr> <td data-bbox="113 584 531 651">Electrical Data</td> <td data-bbox="531 584 778 651"></td> <td data-bbox="778 584 1123 651"></td> <td data-bbox="1123 584 1479 651"></td> </tr> <tr> <td data-bbox="113 651 531 703">Impedance</td> <td data-bbox="531 651 778 703"></td> <td data-bbox="778 651 1123 703">50Ω</td> <td data-bbox="1123 651 1479 703"></td> </tr> <tr> <td data-bbox="113 703 531 754">Frequency Range</td> <td data-bbox="531 703 778 754"></td> <td data-bbox="778 703 1123 754">DC To 18GHz</td> <td data-bbox="1123 703 1479 754"></td> </tr> <tr> <td data-bbox="113 754 531 806">VSWR</td> <td data-bbox="531 754 778 806"></td> <td data-bbox="778 754 1123 806">≤ 1.15 (DC To 18GHz)</td> <td data-bbox="1123 754 1479 806"></td> </tr> <tr> <td data-bbox="113 806 531 857">Insertion Loss</td> <td data-bbox="531 806 778 857"></td> <td data-bbox="778 806 1123 857">≤ 0.05 x √f(GHz) dB</td> <td data-bbox="1123 806 1479 857"></td> </tr> <tr> <td data-bbox="113 857 531 909">Insulation Resistance</td> <td data-bbox="531 857 778 909"></td> <td data-bbox="778 857 1123 909">≥ 5000MΩ</td> <td data-bbox="1123 857 1479 909"></td> </tr> <tr> <td data-bbox="113 909 531 960">Dielectric Withstanding Voltage (at sea level)</td> <td data-bbox="531 909 778 960"></td> <td data-bbox="778 909 1123 960">1500 V rms</td> <td data-bbox="1123 909 1479 960"></td> </tr> <tr> <td data-bbox="113 960 531 1081">Working Voltage (at sea level)</td> <td data-bbox="531 960 778 1081"></td> <td data-bbox="778 960 1123 1081">500 V rms</td> <td data-bbox="1123 960 1479 1081"></td> </tr> </table>	Electrical Data				Impedance		50Ω		Frequency Range		DC To 18GHz		VSWR		≤ 1.15 (DC To 18GHz)		Insertion Loss		≤ 0.05 x √f(GHz) dB		Insulation Resistance		≥ 5000MΩ		Dielectric Withstanding Voltage (at sea level)		1500 V rms		Working Voltage (at sea level)		500 V rms				
Electrical Data																																			
Impedance		50Ω																																	
Frequency Range		DC To 18GHz																																	
VSWR		≤ 1.15 (DC To 18GHz)																																	
Insertion Loss		≤ 0.05 x √f(GHz) dB																																	
Insulation Resistance		≥ 5000MΩ																																	
Dielectric Withstanding Voltage (at sea level)		1500 V rms																																	
Working Voltage (at sea level)		500 V rms																																	
<table border="1"> <tr> <td data-bbox="113 1081 531 1149">Mechanical Data</td> <td data-bbox="531 1081 778 1149"></td> <td data-bbox="778 1081 1123 1149">SMA</td> <td data-bbox="1123 1081 1479 1149">TNC</td> </tr> <tr> <td data-bbox="113 1149 531 1200">Recommended Coupling Nut Torque</td> <td data-bbox="531 1149 778 1200"></td> <td data-bbox="778 1149 1123 1200">7 to 9.5 in-lbs</td> <td data-bbox="1123 1149 1479 1200">4.1 to 6.1 in-lbs</td> </tr> <tr> <td data-bbox="113 1200 531 1252">Coupling Proof Torque</td> <td data-bbox="531 1200 778 1252"></td> <td data-bbox="778 1200 1123 1252">15 in-lbs</td> <td data-bbox="1123 1200 1479 1252">15 in-lbs</td> </tr> <tr> <td data-bbox="113 1252 531 1303">Coupling Nut Retention Force</td> <td data-bbox="531 1252 778 1303"></td> <td data-bbox="778 1252 1123 1303">≥ 60.7 lbs</td> <td data-bbox="1123 1252 1479 1303">NA</td> </tr> <tr> <td data-bbox="113 1303 531 1355">Contact Captivation-axial</td> <td data-bbox="531 1303 778 1355"></td> <td data-bbox="778 1303 1123 1355">≥ 6.1 lbs</td> <td data-bbox="1123 1303 1479 1355">≥ 6.1 lbs</td> </tr> <tr> <td data-bbox="113 1355 531 1485">Durability (mating)</td> <td data-bbox="531 1355 778 1485"></td> <td data-bbox="778 1355 1123 1485">≥ 500</td> <td data-bbox="1123 1355 1479 1485">≥ 500</td> </tr> </table>	Mechanical Data		SMA	TNC	Recommended Coupling Nut Torque		7 to 9.5 in-lbs	4.1 to 6.1 in-lbs	Coupling Proof Torque		15 in-lbs	15 in-lbs	Coupling Nut Retention Force		≥ 60.7 lbs	NA	Contact Captivation-axial		≥ 6.1 lbs	≥ 6.1 lbs	Durability (mating)		≥ 500	≥ 500											
Mechanical Data		SMA	TNC																																
Recommended Coupling Nut Torque		7 to 9.5 in-lbs	4.1 to 6.1 in-lbs																																
Coupling Proof Torque		15 in-lbs	15 in-lbs																																
Coupling Nut Retention Force		≥ 60.7 lbs	NA																																
Contact Captivation-axial		≥ 6.1 lbs	≥ 6.1 lbs																																
Durability (mating)		≥ 500	≥ 500																																
<table border="1"> <tr> <td data-bbox="113 1485 531 1552">Environmental Data</td> <td data-bbox="531 1485 778 1552"></td> <td data-bbox="778 1485 1123 1552"></td> <td data-bbox="1123 1485 1479 1552"></td> </tr> <tr> <td data-bbox="113 1552 531 1603">Temperature Range</td> <td data-bbox="531 1552 778 1603"></td> <td data-bbox="778 1552 1123 1603">-65°C to +165°C</td> <td data-bbox="1123 1552 1479 1603"></td> </tr> <tr> <td data-bbox="113 1603 531 1655">Thermal Shock</td> <td data-bbox="531 1603 778 1655"></td> <td data-bbox="778 1603 1123 1655">MIL-STD-202, Method</td> <td data-bbox="1123 1603 1479 1655"></td> </tr> <tr> <td data-bbox="113 1655 531 1706">Moisture Resistance</td> <td data-bbox="531 1655 778 1706"></td> <td data-bbox="778 1655 1123 1706">MIL-STD-202, Method</td> <td data-bbox="1123 1655 1479 1706"></td> </tr> <tr> <td data-bbox="113 1706 531 1758">Corrosion</td> <td data-bbox="531 1706 778 1758"></td> <td data-bbox="778 1706 1123 1758">MIL-STD-202, Method</td> <td data-bbox="1123 1706 1479 1758"></td> </tr> <tr> <td data-bbox="113 1758 531 1998">RoHS</td> <td data-bbox="531 1758 778 1998"></td> <td data-bbox="778 1758 1123 1998">Compliant</td> <td data-bbox="1123 1758 1479 1998"></td> </tr> </table>	Environmental Data				Temperature Range		-65°C to +165°C		Thermal Shock		MIL-STD-202, Method		Moisture Resistance		MIL-STD-202, Method		Corrosion		MIL-STD-202, Method		RoHS		Compliant												
Environmental Data																																			
Temperature Range		-65°C to +165°C																																	
Thermal Shock		MIL-STD-202, Method																																	
Moisture Resistance		MIL-STD-202, Method																																	
Corrosion		MIL-STD-202, Method																																	
RoHS		Compliant																																	

# ADS-A3T8-18-1.15

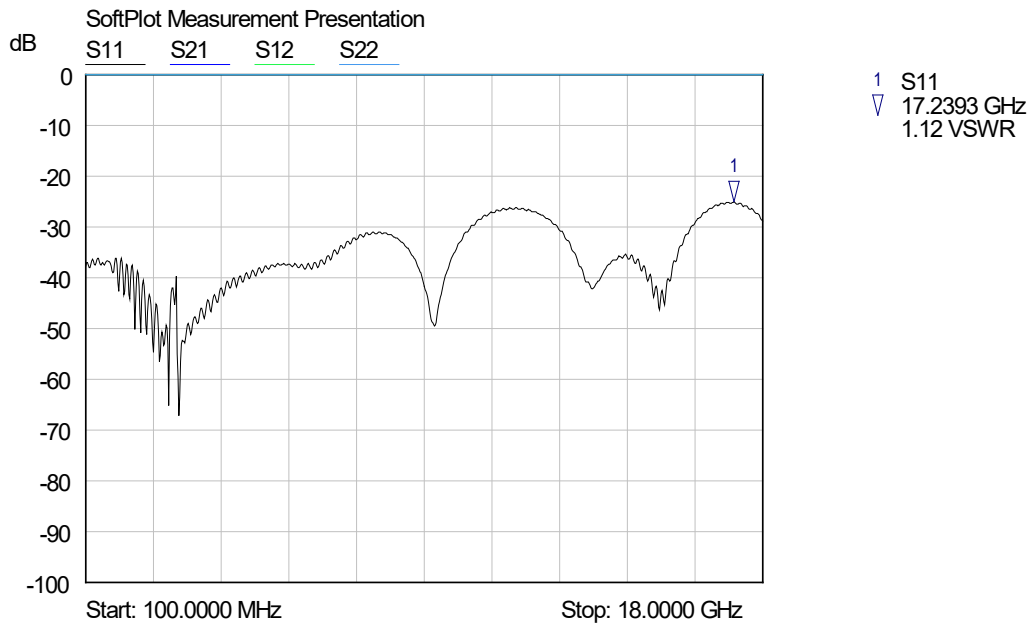

勝特力電材超市-龍山店 886-3-5773766  
勝特力電材超市-光復店 886-3-5729570  
勝特力电子(上海) 86-21-34970699  
勝特力电子(深圳) 86-755-83298787  
<http://www.100y.com.tw>