

## LED dual function displays

## Universal with dual functions, 4 combinations (AC+DC)


## Codix 54U



The Codix 54U is a voltage-powered dual function counter with 4 functions in one device:

Counter with 2 totalising ranges, totaliser and timer, totaliser and frequency meter, timer with 2 time ranges.

For fast and slow count pulses, with 6-digit LED display for NPN, PNP input signals.

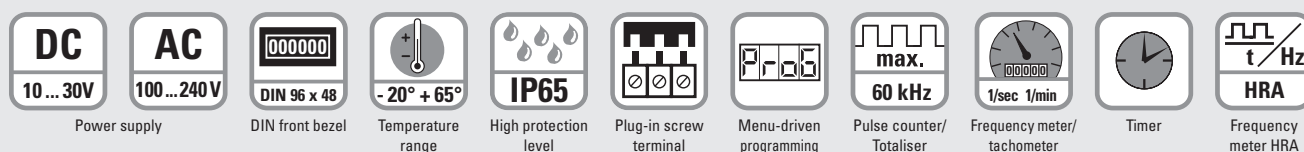

## Powerful

- Fast count and frequency input – input frequency max. 60 kHz
- Robust housing – IP65 protected
- Very bright LED display, 14 mm high, 6 digits
- Very accurate precise frequency measurement principle (HRA-High Rate Accuracy System)  
 Frequencies up to 38 Hz are calculated using time-interval (period duration) measurement. Frequencies > 38 Hz are calculated using a special time base (gate time) measurement. A very high accuracy of < 0.1% is achieved, even with very short gate times. The resulting measurement is available after a max. of 50 ms.
- Short start-up time – detects input pulses just 16 msec after being switched on => no pulses are lost with a simultaneous motor start-up

## User-friendly and universal

- Large keys – can also be operated when wearing gloves
- Programming:
  - Simple uniform menu-driven programming and operation
  - Possible to enter the programming also during operation with a confirmation prompt
  - Pressing the right key switches between displays
- Individually programmable scaling: multiplication and division factor (0.0001...99.9999), to display corresponding engineering units, e.g. position in 1/10 mm and speed in RPM
- Separate factors for frequency- and pulse counting
- AC or DC power supply
- Inputs: as an alternative to the HTL inputs, devices with a 5 V DC input level are available, for use as parallel displays for PLCs
- Timer specials: timer or hours-run meter with various Start/Stop measurements, time range settings in hours, minutes or seconds, with decimal point. Resolutions up to 1/1000 can be programmed.

## Order code

6.54U . 01 2 . XX0  
 a b

**a** Power supply  
 0 = 100 ... 240 V AC, ± 10%  
 3 = 10 ... 30 V DC

**b** Input switching level  
 0 = Standard (HTL)  
 A = 4 ... 30 V DC

**Delivery specification**  
 – Digital display  
 – Mounting clip  
 – Gasket  
 – 2 plug-in screw terminals  
 – Instruction manual, multilingual

**Replacement parts**  
 7 pin screw terminal RM 3.81 1 ... 7: N100387  
 2 pin screw terminal RM 5.08 1 ... 2: N100133

## Accessories

## Dimensions in mm [inch]

## Order-No.

**Mounting frame**  
 with cut-out 92 x 45 [3.62 x 1.77]

For snap-on mounting on 35 [1.38] top-hat DIN rail,  
 for counters 96 x 48 [3.74 x 1.89]

grey

G300005

Suitable gaskets as well as further accessories can be found in the accessories section or in the accessories area of our website at: [www.kuebler.com/accessories](http://www.kuebler.com/accessories).

# Multifunction devices, electronic

<b>LED dual function displays</b>	<b>Universal with dual functions, 4 combinations (AC+DC)</b>	<b>Codix 54U</b>
-----------------------------------	--	------------------

## Technical data

General technical data	
<b>Display</b>	6 digit, red 7 segment LED display; 14 mm [0.55"] high
<b>Data backup</b>	EEPROM
<b>Operating temperature</b>	10 ... 26 V DC -20°C ... +60°C [-4°F ... +140°F] (non-condensing)
<b>Storage temperature</b>	-25°C ... +70°C [-13°F ... +158°F]
<b>Altitude</b>	up to 2000 m [6562']

Electrical characteristics	
<b>Power supply</b>	10 ... 30 V DC, with reverse polarity protection 100 ... 240 V AC, $\pm 10\%$
<b>Current consumption</b>	max. 50 mA, 6 VA
<b>EMC</b>	Emitted interference EN 55011 class B Immunity to interference EN 61000-6-2
<b>Device safety</b>	Designed to EN 61010 part 1 Protection class 2 Application area Pollution level 2


Mechanical characteristics	
<b>Housing</b>	front panel mount 96 x 48 mm [3.74 x 1.89"] acc. to DIN 43700; RAL 7021, dark grey
<b>Protection</b>	IP65 (front side)
<b>Weight</b>	approx. 150 g [5.29 oz]

Inputs	
<b>Polarity of inputs</b>	programmable, NPN or PNP for all inputs
<b>Input resistance</b>	approx. 5 k $\Omega$
<b>Counting frequency <sup>1)</sup></b>	max. 60 kHz, can be damped to 30 Hz
<b>Display range</b>	timer 0.001 s ... 999999 h frequency meter 1/min or 1/sec
<b>Minimum pulse duration of the reset input</b>	5 ms
<b>Input switching level standard version (HTL)</b>	
DC power supply	LOW 0 ... 0.2 x U <sub>B</sub> [V DC] HIGH 0.6 x U <sub>B</sub> ... 30 V DC
AC power supply	LOW 0 ... 4 V DC HIGH 12 ... 30 V DC
<b>Input switching level at 4 ... 30 V DC</b>	LOW 0 ... 2 V DC HIGH 4 ... 30 V DC
<b>Accuracy</b>	frequency meter / tachometer < 0.1 % timer < 50 ppm


Outputs	
<b>Sensor power supply (AC version)</b>	24 V DC $\pm 15\%$ / 100 mA

## Applications for dual functions


- Pulse and frequency (speed)  
e.g. production data acquisition: total piece count and speed on OEM equipment, flow rate measuring systems – total flow and current flow
- 2 pulse counters  
Measurement of batch and total piece count or of daily production count and total count values
- Pulse and time (maintenance counter)  
Used in the lift industry as trip counters and hours-run meters and on production machines for piece and time counting, flow and time measurement, materials handling time and quantities
- 2 timers  
Measurement of total time and orderspecific times, maintenance intervals and total time, time of day and total time



Piece count on conveyor and production speed




Trip counter and hours-run



Flow rate and total volume

Multifunction devices

## Block diagram

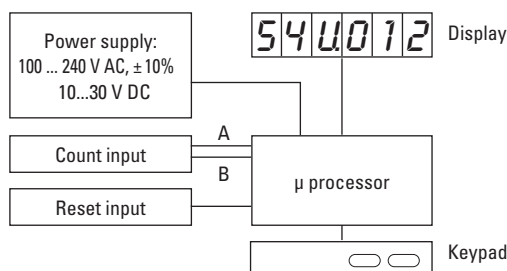

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

1) Details see manual


## Multifunction devices, electronic

### LED dual function displays

### Universal with dual functions, 4 combinations (AC+DC)

### Codix 54U

#### Terminal assignment

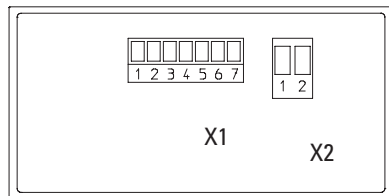

#### Connection X1

PIN	AC version	DC version
1	n.c.	
2	n.c.	
3	Reset	
4	INP B	
5	INP A	
6	GND out	n.c.
7	+24 V out	n.c.

#### Connection X2

PIN	AC version	DC version
1	100 ... 240 V AC, $\pm 10\%$	0V DC (GND)
2	100 ... 240 V AC, $\pm 10\%$	10 ... 30 V DC

#### Function of the inputs INP A, INP B

##### Counter with 2 totalising ranges:

INP A: Dynamic count input counter 1 and counter 2

INP B: Inactive

##### Totaliser and timer:

INP A: Dynamic count input for totaliser

INP B: Start/Stop or gate input for timer, totaliser and frequency meter

##### Totaliser and frequency meter:

INP A: Dynamic count input/frequency input

INP B: Inactive


##### Timer with 2 time ranges:

INP A: Start input (depends on input type)

INP B: Start/Stop or gate input for timer (depends on input type)

#### Dimensions

Dimensions in mm [inch]

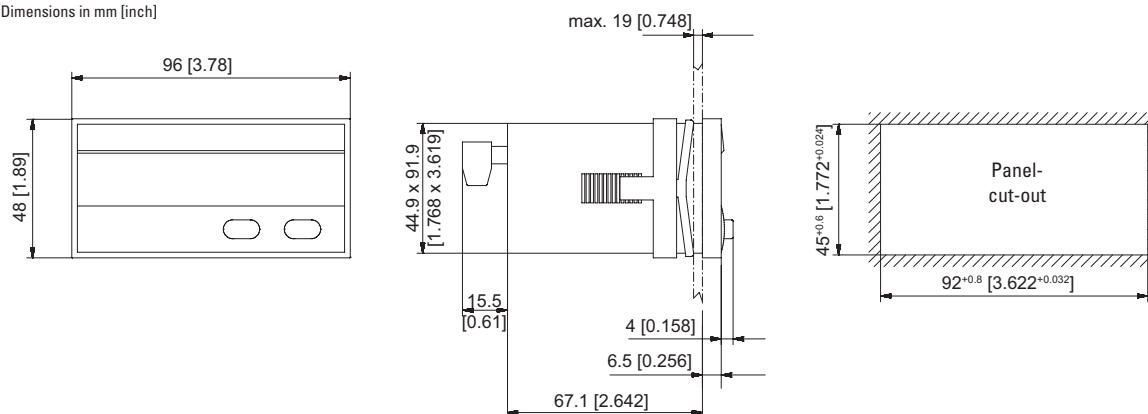

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)