

PL2303-USB-UART-Board

USB 轉 TTL USB 轉串口 mini

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)



產品說明

產品特性：

採用 PL2303TA (兼容 PL2303HXA)

支援 windows XP/7/8/8.1/10/...

支援 3 種供電模式：5V 對外供電；3.3V 對外供電；由外部供電(要求 3.3V-5V)

帶 3 個 LED：TXD LED、RXD LED、POWER LED

使用說明：(以接入 MCU 為例)

VCCIO：輸出 3.3V 或 5V(模塊由 USB 供電，須將跳線帽跳到 3.3V 或 5V)

GND：接 GND

TXD：接 MCU.RX (信號流向：MCU.RX << PL2303 << PC.TX)

RXD：接 MCU.TX (信號流向：MCU.TX >> PL2303 >> PC.RX)

注意：該模塊為 USB 轉 TTL 電平，切勿直連 RS232 電平，以免燒壞模塊。

資料包括：

電路原理圖

開發資料

開發軟件


下載路徑：[www.waveshare.net/wiki/PL2303_USB_UART_Board_\(mini\)](http://www.waveshare.net/wiki/PL2303_USB_UART_Board_(mini))

產品兼容性說明

兼容且可直接接入下列產品：

Open051C	Open103C	Open103R	Open103V
Open103Z	Open107V	Open1114	Open11C14
Open1343	Open16F877A	Open1768	Open1788
Open18F4520	Open207I-C	Open207V-C	Open207Z-C
Open2440	Open32F0-D	Open32F3-D	Open32L-D
Open3S250E	Open3S500E	Open407I-C	Open407V-C
Open407V-D	Open407Z-C	Open4337-C	Open8S208Q80
OpenEP2C8-C	OpenEP3C16	OpenEP3C16-C	OpenEP4CE10-C
OpenEP4CE6-C	OpenEPM1270	OpenM128	

產品尺寸

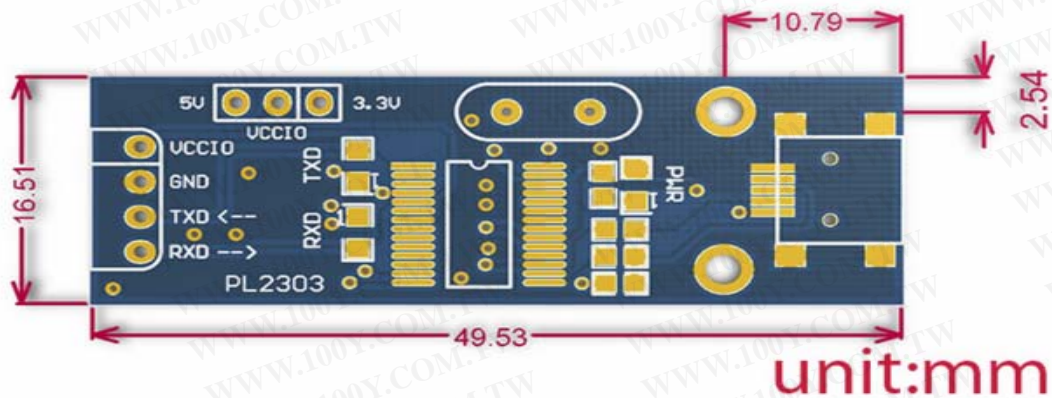

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)