



N8146-0058

N Jack Crimp For Panel Receptacle 50Ω

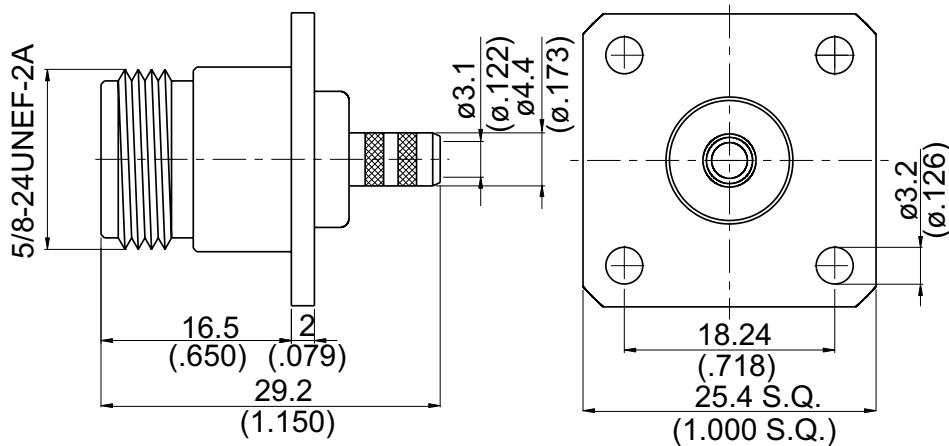

MOUNTING HOLE :

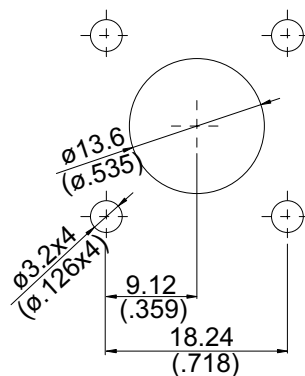

Parts	Material	Plating (Micro-inch)
Ferrule	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Contact Pin	Phosphor Bronze	Gold 5 Over Nickel 50 Over Copper 50
Barrel	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Insulator	Teflon	
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50

Weight: 32.16 g

Suitable Cables: RG58, JBY195

CABLE ASSEMBLY INSTRUCTION

N8146-0058

JYE BAO CO., LTD.

N8146-0058

DATE

2014/04/29


REV

—

A

B

C



BODY



CONTACT PIN




FERRULE

DIAGRAM


ASSEMBLY INSTRUCTION




Step 1: STRIP AS SHOWN.



Step 2: SLIDE FERRULE "C" OVER CABLE.
 Step 3: PUT PIN "B" ON CENTER CONDUCTOR AND SOLDER OR CRIMP IN "Y".
 (USE SQUARE 2.4mm/0.094inch SECTION OF INSERT-B IF CRIMPED)

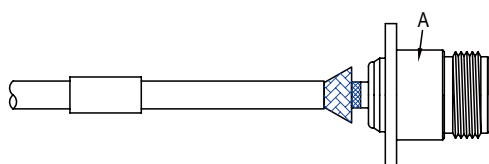

Step 4: LOOSEN BRAIDING AND SLIDE CONNECTOR "A" IN PLACE.

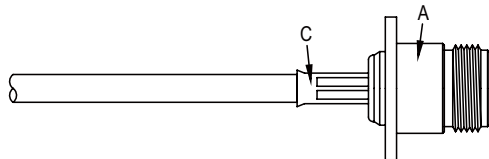

Step 5: SLIDE FERRULE "C" TOWARDS THE CONNECTOR "A" AND CRIMP.
 (USE 5.5mm/0.217inch HEX SECTION OF INSERT-B)