

勝特力電材超市-龍山店 886-3-5773766
 勝特力電材超市-光復店 886-3-5729570
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
<http://www.100y.com.tw>

技术参数 ZYTD-38SRZ-R

电压 Voltage VDC	空载转速 No-load speed Rpm	空载电流 No-load Curent Amp	额定转速 Sated Speed Rpm	额定电流 Sated Curent Amp	额定转矩 Rated Torque G. cm
12v	2000	0. 05	1600	0. 52	160
	3000	0. 19	2500	0. 38	200
	4000	0. 35	3200	0. 67	280
	5000	0. 32	4000	1. 15	500
24V	2000	0. 12	1800	0. 52	180
	3000	0. 35	2500	0. 38	200
	4000	0. 32	3500	1. 12	300
	5000	0. 22	4000	0. 97	500

品名	规格	出轴
ZYTD-38SRZ	12V1500R/AD38S-001/R	常规出轴
ZYTD-38SRZ	12V2000R/AD38S-001/R	常规出轴
ZYTD-38SRZ	12V2000R/AD38S-144/R	
ZYTD-38SRZ	12V2000R/AD38S-168/R	
ZYTD-38SRZ	12V2500R/AD38S-118/R	
ZYTD-38SRZ	12V3000R/AD38S-001/R	常规出轴
ZYTD-38SRZ	12V4000R/AD38S-001/R	常规出轴
ZYTD-38SRZ	12V4000R/AD38S-158/R	
ZYTD-38SRZ	12V5000R/AD38S-001/R	常规出轴
ZYTD-38SRZ	12V5500R/AD38S-001/R	常规出轴
ZYTD-38SRZ	12V6000R/AD38S-001/R	常规出轴
ZYTD-38SRZ	12V7000R/AD38S-001/R	常规出轴
ZYTD-38SRZ	12V10000R/AD38S-001/R	常规出轴
ZYTD-38SRZ	24V1000R/AD38S-001/R	常规出轴
ZYTD-38SRZ	24V1000R/AD38S-040/R	
ZYTD-38SRZ	24V2000R/AD38S-001/R	常规出轴
ZYTD-38SRZ	24V2000R/AD38S-170/R	
ZYTD-38SRZ	24V3000R/AD38S-001/R	常规出轴
ZYTD-38SRZ	24V3000R/AD38S-003/R	
ZYTD-38SRZ	24V3000R/AD38S-020/R	
ZYTD-38SRZ	24V3000R/AD38S-040/R	
ZYTD-38SRZ	24V3000R/AD38S-045/R	
ZYTD-38SRZ	24V3500R/AD38S-158/R	
ZYTD-38SRZ	24V4000R/AD38S-001/R	常规出轴
ZYTD-38SRZ	24V4000R/AD38S-020/R	
ZYTD-38SRZ	24V4000R/AD38S-178/R	
ZYTD-38SRZ	24V5000R/AD38S-001/R	常规出轴
ZYTD-38SRZ	24V5000R/AD38S-138/R	
ZYTD-38SRZ	24V5000R/AD38S-169/R	
ZYTD-38SRZ	24V7000R/AD38S-001/R	常规出轴
ZYTD-38SRZ	24V7000R/AD38S-045/R	
ZYTD-38SRZ	24V8000R/AD38S-001/R	常规出轴
ZYTD-38SRZ	28V2000R/AD38S-120/R	




WIRING DIAGRAM

接线图示

正科电机 专注品质


正反转接线图

接电源（不分正负）

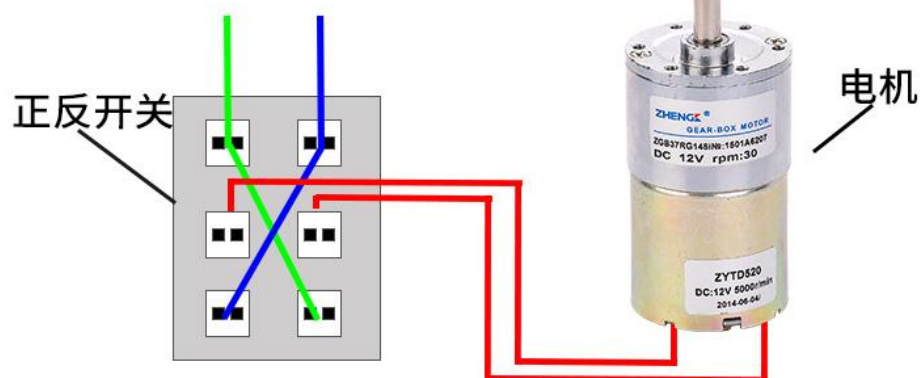


注意：此接法只适合有刷电机，无刷电机不适合

正科有刷电机调速板+正反转开关接线图

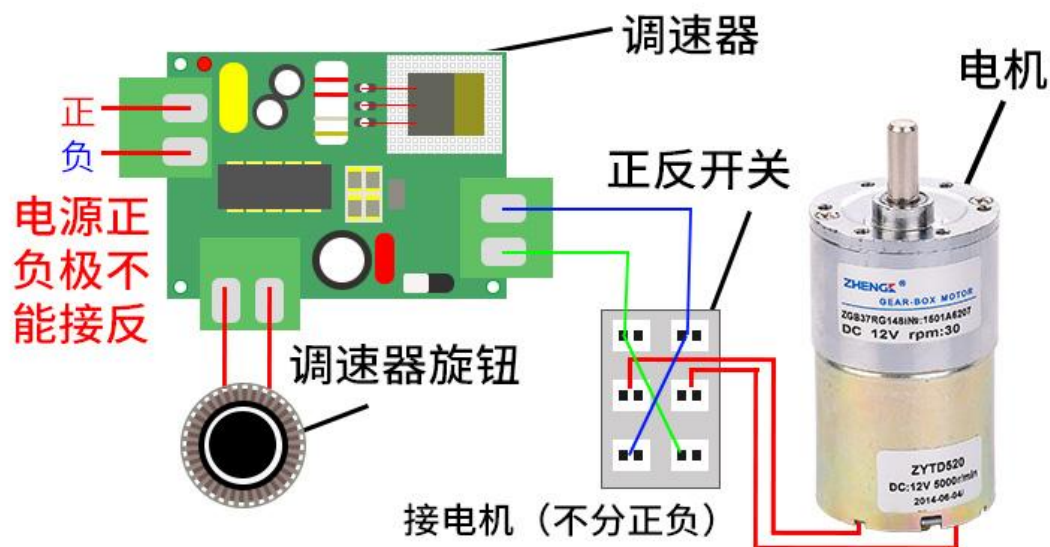


注意：电源电压应于电机额定电机一样

无级调速接线图

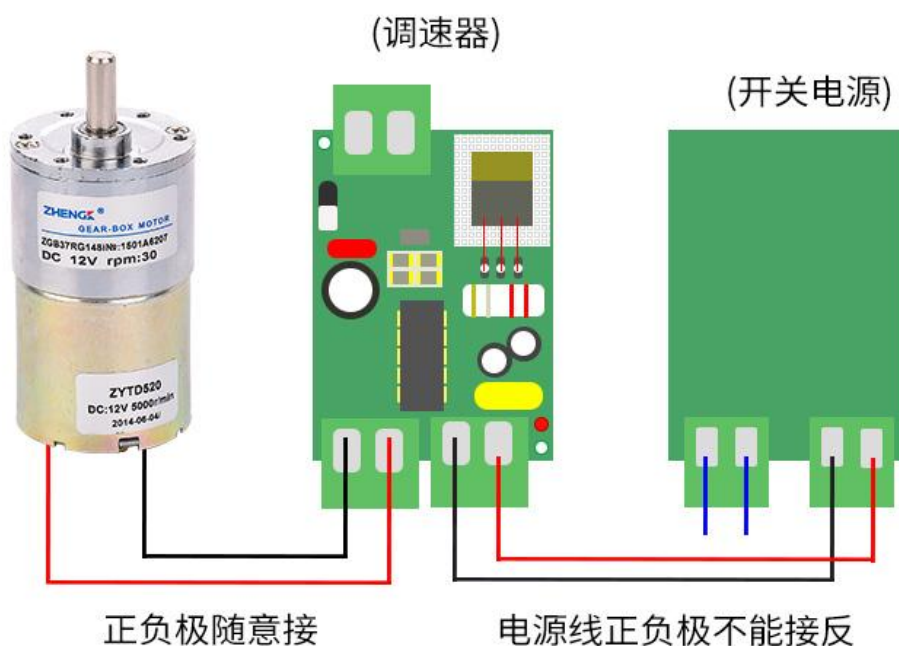

型号及说明

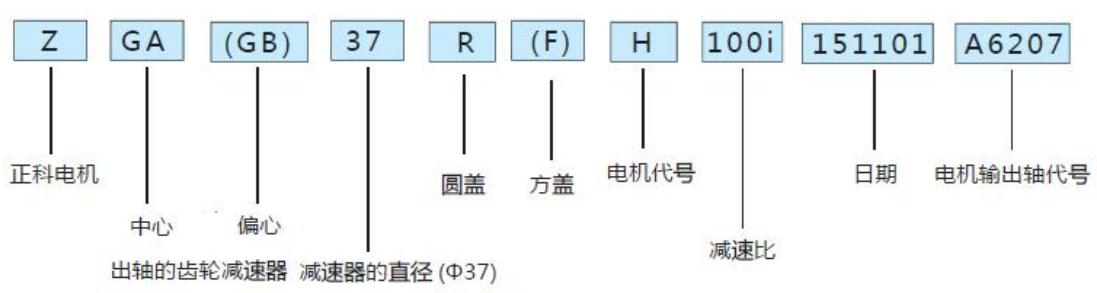

大功率直流减速电机型号及说明



单位换算表

N.m	mN.m	gf.cm	kgf.cm
1	1000	10200	10.2
0.001	2	10.2	0.0102
9.8×10^{-5}	9.8×10^{-2}	1	10×10^{-3}
9.8×10^{-2}	98	1000	1