

Supplementary Fuseblocks

Type M, For 13/32" x 1 1/2" Fuses

600 Volt, 30 Amps

BM Series



Dimensional Data All dimensions (±0.015)

Catalog Symbol: BM Series

Type M Supplementary Fuseblocks

For use with any 13/32" x 1 1/2" Fuses
(Bussmann KTK, FNQ, FNM, BAF, BAN and AGU)

Ampere Rating: 1/10 to 30A

Voltage Rating: 600V

Withstand Rating: 10,000A RMS Sym. or interrupting rating of the fuse used, whichever is lower.

Agency Information:

UL Recognized, UL 512, Guide IZLT2, File E14853

CSA Certified, C22.2 No. 39, Class 6225-01, File 47235


UL Flammability: 94VO

Material: Thermoplastic

DIN-RAIL Adapters: DRA-1 and DRA-2


Catalog Data

Amps	Poles	Terminal Type			Fig. No.
		Screw with Quick Connect*	Pressure Plate w/ Quick Connect*	Box Lug	
1/10 to 30	1	BM6031SQ	BM6031PQ	BM6031B	1
	2	BM6032SQ	BM6032PQ	BM6032B	2
	3	BM6033SQ	BM6033PQ	BM6033B	3

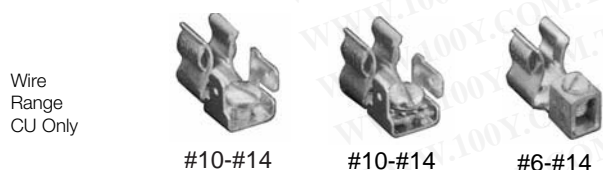


* QUICK CONNECT RATED FOR 20A MAXIMUM.


1 POLE

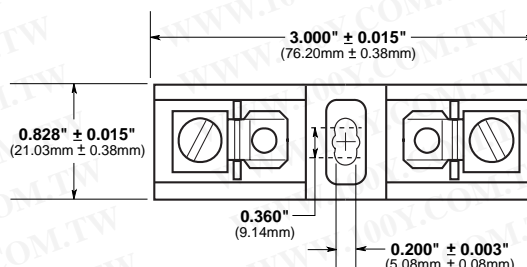


2 POLE

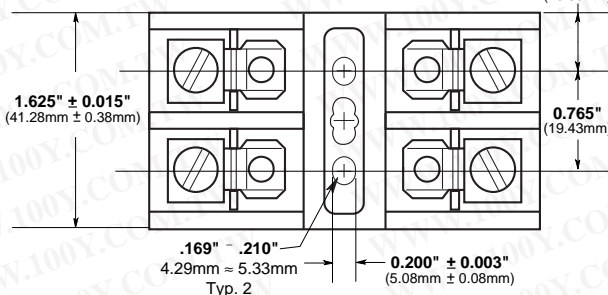

3 POLE

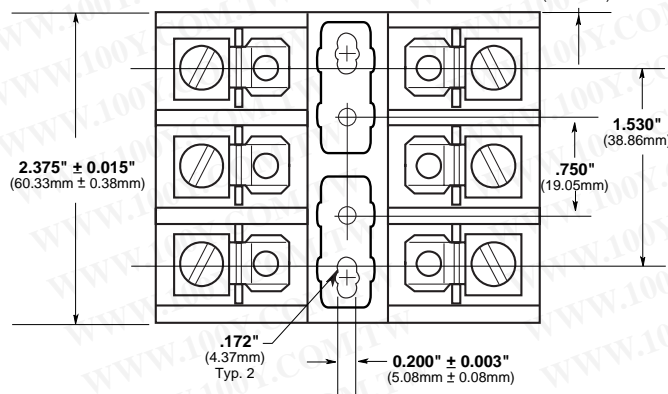

FUSEBLOCK LABEL (EXAMPLE SHOWN)

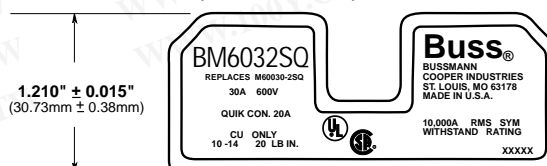

The only controlled copy of this Data Sheet is the electronic read-only version located on the Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)