

# DATA SHEET

## **BFT92**

## **PNP 5 GHz wideband transistor**

Product specification

November 1992

File under Discrete Semiconductors, SC14

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## PNP 5 GHz wideband transistor

## BFT92

## DESCRIPTION

PNP transistor in a plastic SOT23 envelope.

It is primarily intended for use in RF wideband amplifiers, such as in aerial amplifiers, radar systems, oscilloscopes, spectrum analyzers, etc. The transistor features low intermodulation distortion and high power gain; due to its very high transition frequency, it also has excellent wideband properties and low noise up to high frequencies.

NPN complements are BFR92 and BFR92A.

## PINNING

PIN	DESCRIPTION
Code: W1p	
1	base
2	emitter
3	collector

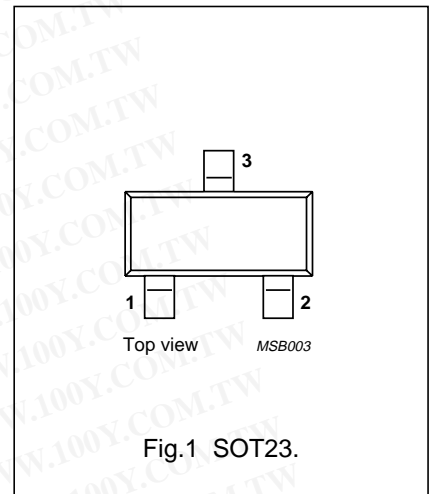


Fig.1 SOT23.

## QUICK REFERENCE DATA

SYMBOL	PARAMETER	CONDITIONS	TYP.	MAX.	UNIT
$V_{CBO}$	collector-base voltage	open emitter	–	–20	V
$V_{CEO}$	collector-emitter voltage	open base	–	–15	V
$I_C$	DC collector current		–	–25	mA
$P_{tot}$	total power dissipation	up to $T_s = 95\text{ }^\circ\text{C}$ ; note 1	–	300	mW
$f_T$	transition frequency	$I_C = -14\text{ mA}$ ; $V_{CE} = -10\text{ V}$ ; $f = 500\text{ MHz}$	5	–	GHz
$C_{re}$	feedback capacitance	$I_C = -2\text{ mA}$ ; $V_{CE} = -10\text{ V}$ ; $f = 1\text{ MHz}$	0.7	–	pF
$G_{UM}$	maximum unilateral power gain	$I_C = -14\text{ mA}$ ; $V_{CE} = -10\text{ V}$ ; $f = 500\text{ MHz}$ ; $T_{amb} = 25\text{ }^\circ\text{C}$	18	–	dB
F	noise figure	$I_C = -5\text{ mA}$ ; $V_{CE} = -10\text{ V}$ ; $f = 500\text{ MHz}$ ; $T_{amb} = 25\text{ }^\circ\text{C}$	2.5	–	dB
$d_{im}$	intermodulation distortion	$I_C = -14\text{ mA}$ ; $V_{CE} = -10\text{ V}$ ; $R_L = 75\text{ }\Omega$ ; $V_o = 150\text{ mV}$ ; $T_{amb} = 25\text{ }^\circ\text{C}$ ; $f_{(p+q-r)} = 493.25\text{ MHz}$	–60	–	dB

## Note

- $T_s$  is the temperature at the soldering point of the collector tab.

## PNP 5 GHz wideband transistor

BFT92

**LIMITING VALUES**

In accordance with the Absolute Maximum System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V <sub>CBO</sub>	collector-base voltage	open emitter	–	–20	V
V <sub>CEO</sub>	collector-emitter voltage	open base	–	–15	V
V <sub>EBO</sub>	emitter-base voltage	open collector	–	–2	V
I <sub>C</sub>	DC collector current		–	–25	mA
I <sub>CM</sub>	peak collector current	f > 1 MHz	–	–35	mA
P <sub>tot</sub>	total power dissipation	up to T <sub>s</sub> = 95 °C; note 1	–	300	mW
T <sub>stg</sub>	storage temperature		–65	150	°C
T <sub>j</sub>	junction temperature		–	175	°C

**THERMAL RESISTANCE**

SYMBOL	PARAMETER	CONDITIONS	THERMAL RESISTANCE
R <sub>th j-s</sub>	thermal resistance from junction to soldering point	up to T <sub>s</sub> = 95 °C; note 1	260 K/W

**Note**

1. T<sub>s</sub> is the temperature at the soldering point of the collector tab.

## PNP 5 GHz wideband transistor

## BFT92

## CHARACTERISTICS

$T_j = 25\text{ }^\circ\text{C}$  unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
$I_{CBO}$	collector cut-off current	$I_E = 0; V_{CB} = -10\text{ V};$	–	–	–50	nA
$h_{FE}$	DC current gain	$I_C = -14\text{ mA}; V_{CE} = -10\text{ V}$	20	50	–	
$f_T$	transition frequency	$I_C = -14\text{ mA}; V_{CE} = -10\text{ V};$ $f = 500\text{ MHz}$	–	5	–	GHz
$C_c$	collector capacitance	$I_E = i_e = 0; V_{CB} = -10\text{ V}; f = 1\text{ MHz}$	–	0.75	–	pF
$C_e$	emitter capacitance	$I_C = i_c = 0; V_{EB} = -0.5\text{ V}; f = 1\text{ MHz}$	–	0.8	–	pF
$C_{re}$	feedback capacitance	$I_C = -2\text{ mA}; V_{CE} = -10\text{ V}; f = 1\text{ MHz}$	–	0.7	–	pF
$G_{UM}$	maximum unilateral power gain (note 1)	$I_C = -14\text{ mA}; V_{CE} = -10\text{ V};$ $f = 500\text{ MHz}; T_{amb} = 25\text{ }^\circ\text{C}$	–	18	–	dB
F	noise figure	$I_C = -5\text{ mA}; V_{CE} = -10\text{ V};$ $f = 500\text{ MHz}; T_{amb} = 25\text{ }^\circ\text{C}$	–	2.5	–	dB
$V_o$	output voltage	note 2	–	150	–	mV

## Notes





1.  $G_{UM}$  is the maximum unilateral power gain, assuming  $S_{12}$  is zero and

$$G_{UM} = 10 \log \left( \frac{|S_{21}|^2}{(1 - |S_{11}|^2)(1 - |S_{22}|^2)} \right) \text{dB.}$$

2.  $d_{im} = -60\text{ dB}$  (DIN 45004B);  $I_C = -14\text{ mA}; V_{CE} = -10\text{ V}; R_L = 75\text{ }\Omega;$   
 $V_p = V_o$  at  $d_{im} = -60\text{ dB}; f_p = 495.25\text{ MHz};$   
 $V_q = V_o - 6\text{ dB}; f_q = 503.25\text{ MHz};$   
 $V_r = V_o - 6\text{ dB}; f_r = 505.25\text{ MHz};$   
 measured at  $f_{(p+q-r)} = 493.25\text{ MHz}.$



PNP 5 GHz wideband transistor

BFT92

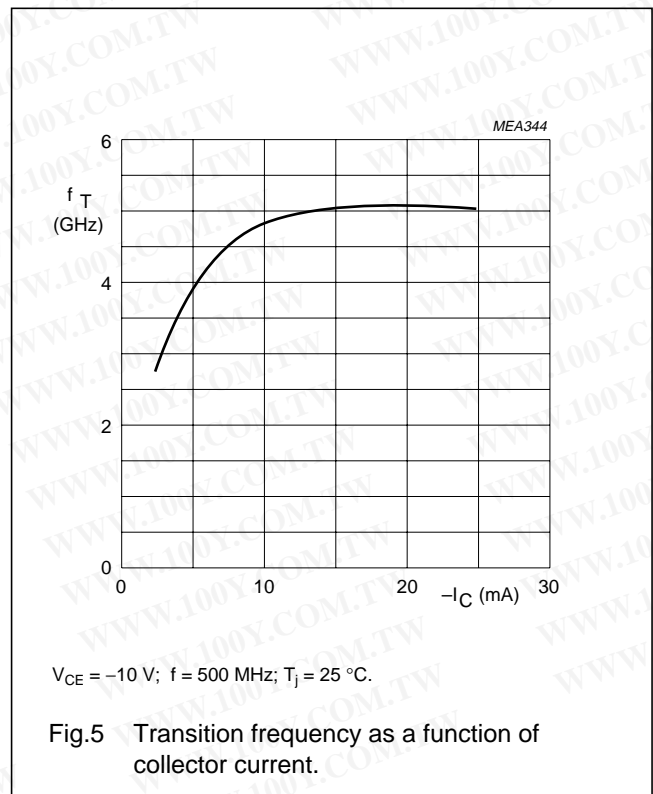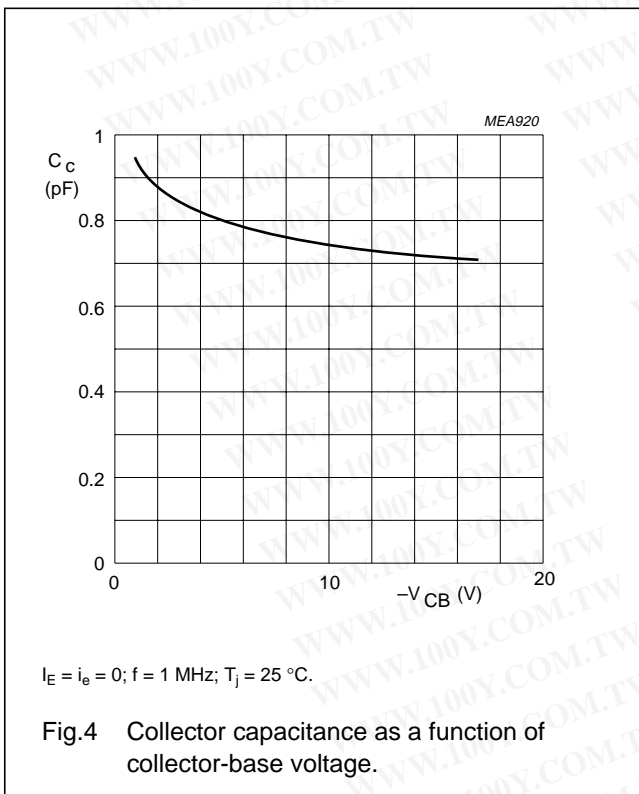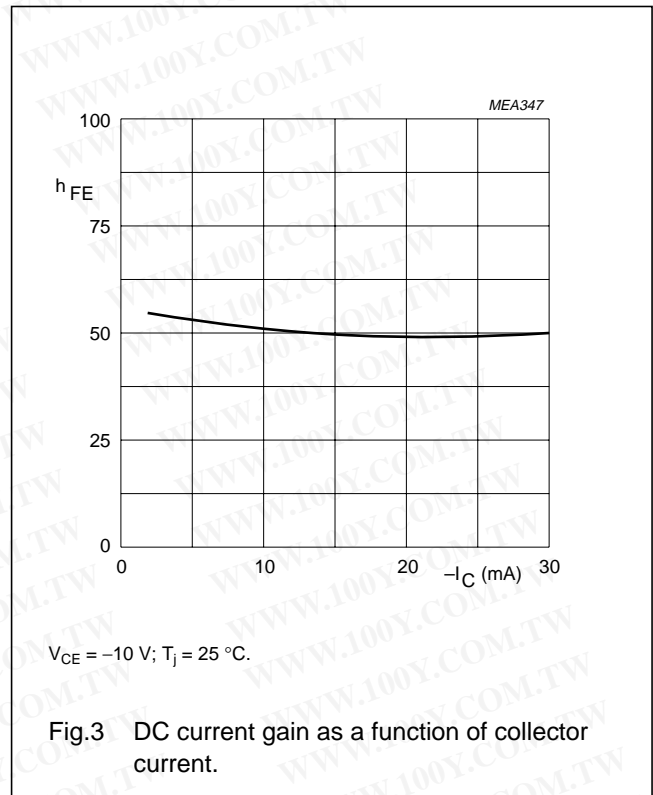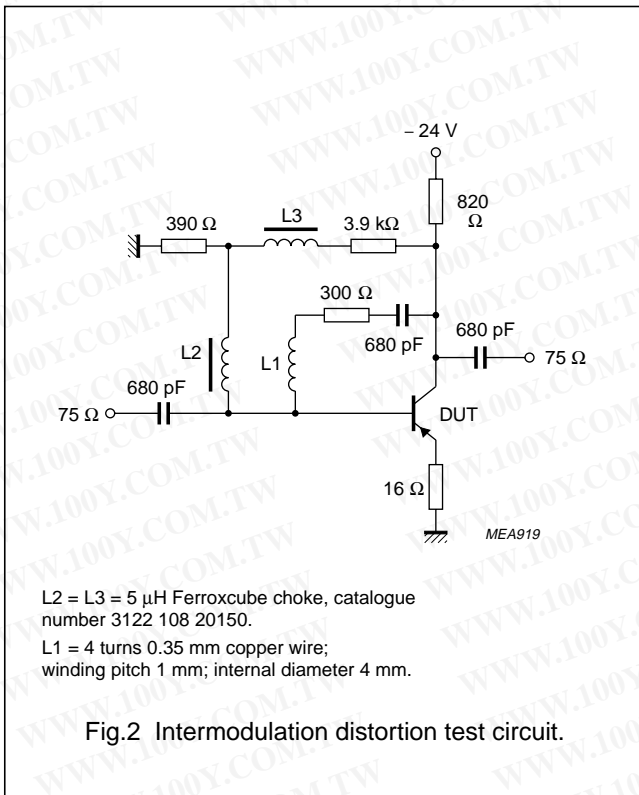

PNP 5 GHz wideband transistor

BFT92

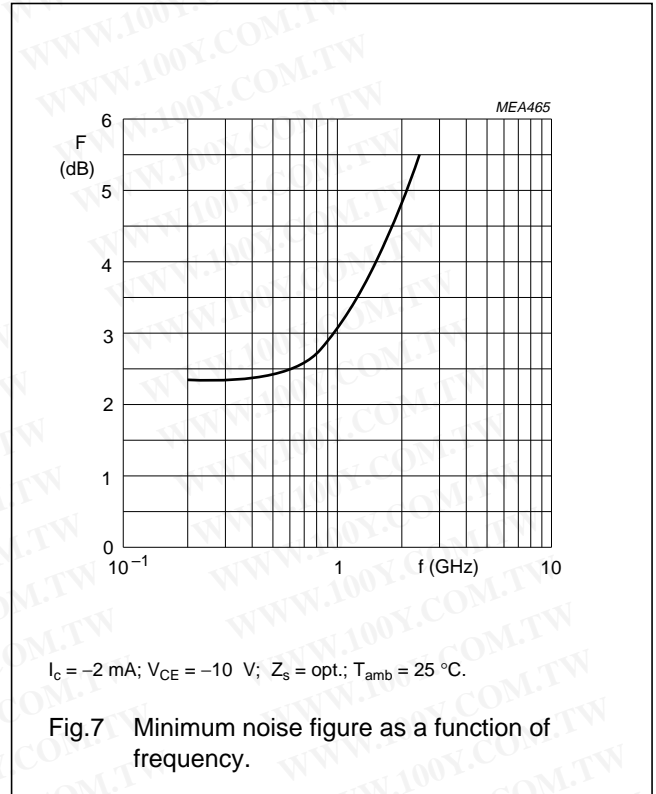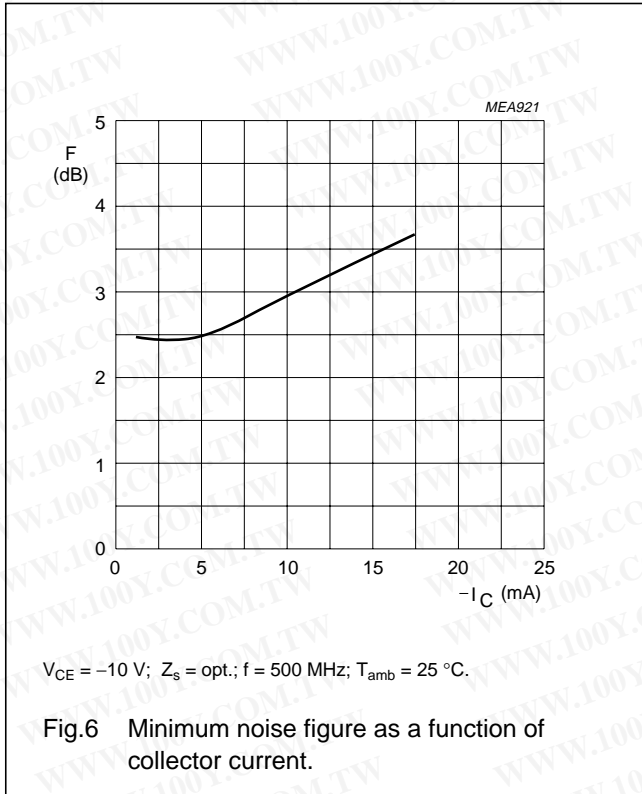

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)


PNP 5 GHz wideband transistor

BFT92

PACKAGE OUTLINE

Plastic surface mounted package; 3 leads

SOT23

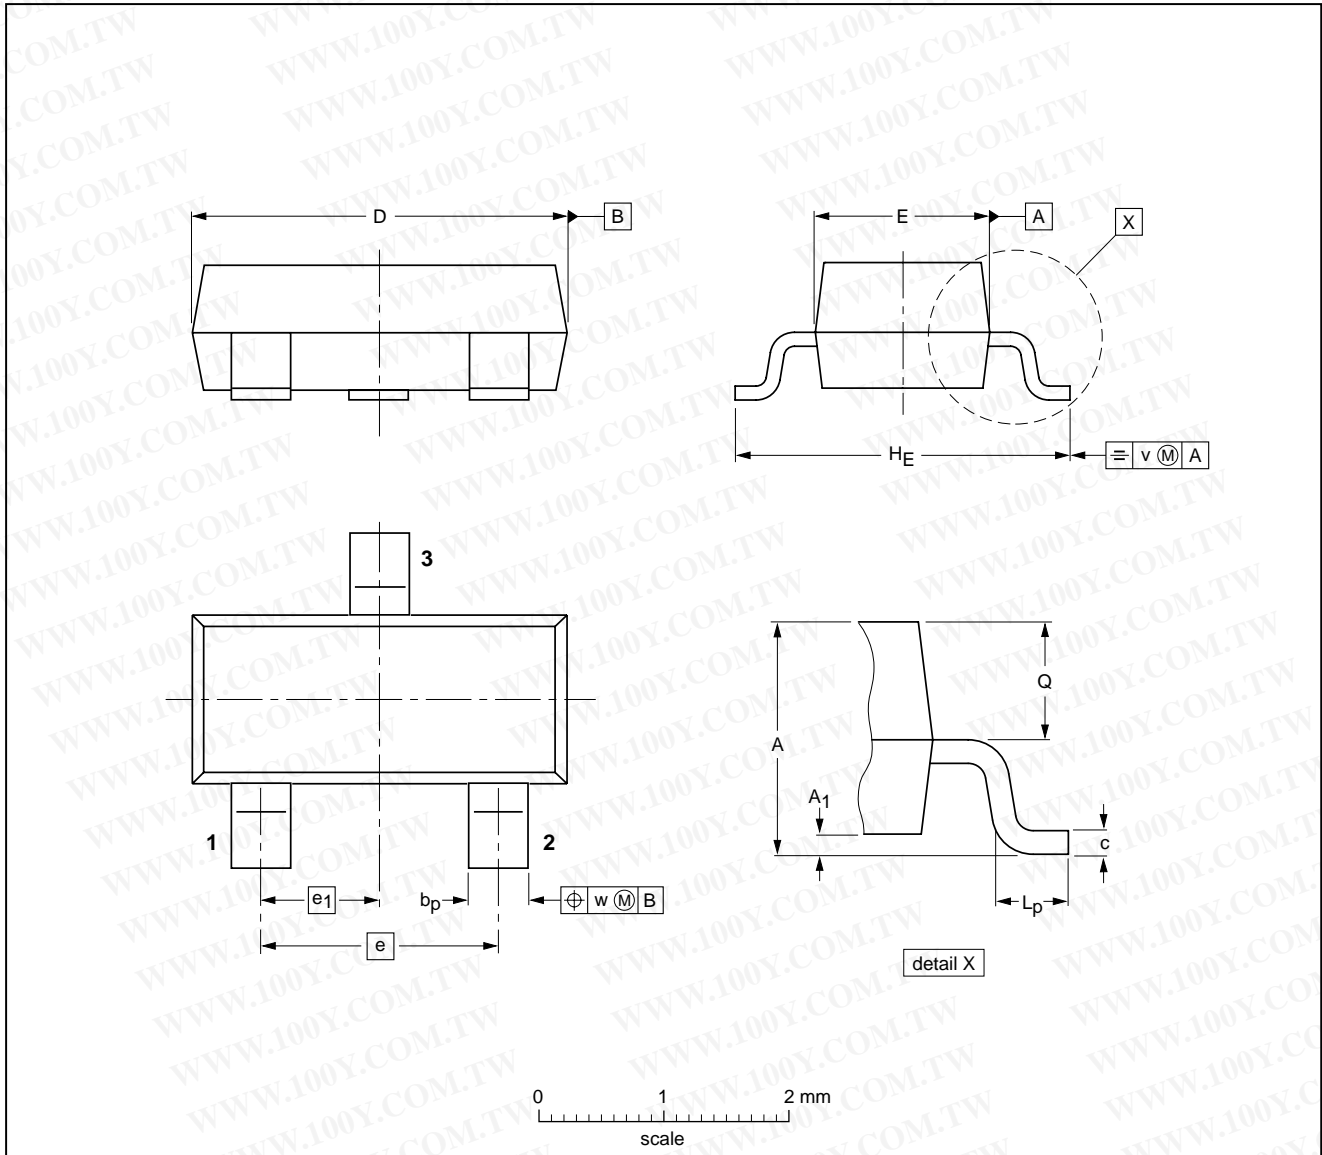

DIMENSIONS (mm are the original dimensions)

UNIT	A	A <sub>1</sub> max.	b <sub>p</sub>	c	D	E	e	e <sub>1</sub>	H <sub>E</sub>	L <sub>p</sub>	Q	v	w
mm	1.1 0.9	0.1	0.48 0.38	0.15 0.09	3.0 2.8	1.4 1.2	1.9	0.95	2.5 2.1	0.45 0.15	0.55 0.45	0.2	0.1

OUTLINE VERSION	REFERENCES			EUROPEAN PROJECTION	ISSUE DATE
	IEC	JEDEC	EIAJ		
SOT23					97-02-28

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## PNP 5 GHz wideband transistor

BFT92

## DEFINITIONS

Data Sheet Status	
Objective specification	This data sheet contains target or goal specifications for product development.
Preliminary specification	This data sheet contains preliminary data; supplementary data may be published later.
Product specification	This data sheet contains final product specifications.
Limiting values	
Limiting values given are in accordance with the Absolute Maximum Rating System (IEC 134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of the specification is not implied. Exposure to limiting values for extended periods may affect device reliability.	
Application information	
Where application information is given, it is advisory and does not form part of the specification.	

## LIFE SUPPORT APPLICATIONS

These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Philips customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips for any damages resulting from such improper use or sale.