**Triacs** 

勝 特 力 材 料 886-3-5753170 胜特力电子(上海) 86-21-54151736 胜特力电子(深圳) 86-755-83298787 Http://www.100y.com.tw

BT138F series

### **GENERAL DESCRIPTION**

Glass passivated triacs in a full pack plastic envelope, intended for use in applications requiring high bidirectional transient and blocking voltage capability and high thermal cycling performance. Typical applications include motor control, industrial and domestic lighting, heating and static switching.


## **QUICK REFERENCE DATA**

SYMBOL	PARAMETER	MAX.	MAX.	MAX.	UNIT
WW	BT138F- BT138F- BT138F-	500 500F 500G	600 600F 600G	800 800F 800G	M.TV
$V_{DRM}$	Repetitive peak off-state voltages	500	600	800	Λ.,
I <sub>T(RMS)</sub> I <sub>TSM</sub>	RMS on-state current Non-repetitive peak on-state current	12 90	12 90	12 90	A


## **PINNING - SOT186**

PIN	DESCRIPTION
1	main terminal 1
2	main terminal 2
3	gate
case	isolated

## PIN CONFIGURATION



### SYMBOL



## LIMITING VALUES

Limiting values in accordance with the Absolute Maximum System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	I.Con	MAX.		UNIT
V <sub>DRM</sub>	Repetitive peak off-state voltages	V.100Y.COM.TW WY	M.TO	<b>-500</b> 500 <sup>1</sup>	<b>-600</b> 600 <sup>1</sup>	<b>-800</b> 800	V
I <sub>T(RMS)</sub>	RMS on-state current Non-repetitive peak on-state current	full sine wave; $T_{hs} \le 56 ^{\circ}\text{C}$ full sine wave; $T_j = 125 ^{\circ}\text{C}$ prior to surge; with reapplied $V_{DRM(max)}$	MW.	100X.C	12	TW	A
	1	t = 20 ms t = 16.7 ms	WINV	1.100	90 100		A
l <sup>2</sup> t dl <sub>⊤</sub> /dt	I <sup>2</sup> t for fusing Repetitive rate of rise of on-state current after	t = 10  ms $I_{TM} = 20 \text{ A}; I_G = 0.2 \text{ A};$ $dI_G/dt = 0.2 \text{ A}/\mu\text{s}$	WW	M.100	40		A A <sup>2</sup> s
	triggering	T2+ G+ T2+ G- T2- G- T2- G+	W.	NW.19	50 50 50 10		A/μs A/μs A/μs A/μs
$egin{array}{c} I_{GM} \ V_{GM} \ P_{GM} \end{array}$	Peak gate current Peak gate voltage Peak gate power	WWW.1007.COW.TW	-	NWW	2 5 5		V W
P <sub>G(AV)</sub> T <sub>stg</sub> T <sub>j</sub>	Average gate power Storage temperature Operating junction temperature	over any 20 ms period	-40 -		0.5 150 125		°C °C

<sup>1</sup> Although not recommended, off-state voltages up to 800V may be applied without damage, but the triac may switch to the on-state. The rate of rise of current should not exceed 15  $A/\mu s$ .

Triacs

勝 特 力 材 料 886-3-5753170 胜特力电子(上海) 86-21-54151736 胜特力电子(深圳) 86-755-83298787 Http://www.100y.com.tw

BT138F series

## **ISOLATION LIMITING VALUE & CHARACTERISTIC**

T<sub>hs</sub> = 25 °C unless otherwise specified

	ON LIMITING VALUE & CHA unless otherwise specified	RACILRISTIC				
SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
V <sub>isol</sub>	Repetitive peak voltage from all three terminals to external heatsink	R.H. ≤ 65% ; clean and dustfree	-11	MM·7	1500	ON.
C <sub>isol</sub>	Capacitance from T2 to external heatsink	f = 1 MHz	- 1	12	109X	pF

## THERMAL RESISTANCES

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
R <sub>th j-hs</sub>	Thermal resistance junction to heatsink	full or half cycle with heatsink compound without heatsink compound	OM.TW	- 1	4.0 5.5	K/W K/W
$R_{\text{th j-a}}$	Thermal resistance junction to ambient	in free air	OMITW	55	0.5 W 1-	K/W

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MO.	MAX.	111	UNIT
I <sub>GT</sub>	Gate trigger current	$V_D = 12 \text{ V}; I_T = 0.1 \text{ A}$ T2+ G+	NAA	501	35	<b>F</b> 25	<b>G</b> 50	mA
	WWW.)	T2+ G- T2- G- T2- G+	WW.	8 10 22	35 35 70	25 25 25 70	50 50 100	mA mA mA
I <sub>L</sub>	Latching current	$V_D = 12 \text{ V}; I_{GT} = 0.1 \text{ A}$ $T2+G+$ $T2+G T2-G T2-G+$	-4/	7 20 8 10	40 60 40 60	40 60 40 60	60 90 60 90	mA mA mA mA
I <sub>H</sub>	Holding current	$V_D = 12 \text{ V}; I_{GT} = 0.1 \text{ A}$	-	6	30	30	60	mA
$V_{T}$	On-state voltage Gate trigger voltage	$I_T = 15 \text{ A}$ $V_D = 12 \text{ V}; I_T = 0.1 \text{ A}$ $V_D = 400 \text{ V}; I_T = 0.1 \text{ A};$ $T_i = 125 \text{ °C}$	- - 0.25	1.4 0.7 0.4	M.100	1.65 1.5 -	I.TW M.TW	> > >
I <sub>D</sub>	Off-state leakage current	$V_D = V_{DRM(max)};$ $T_j = 125 ^{\circ}C$	M -	0.1		0.5	$M^{T}$	mA

特力材料886-3-5753170 胜特力电子(上海) 86-21-54151736 胜特力电子(深圳) 86-755-83298787

Http://www. 100y. com. tw

BT138F series

Triacs

## DYNAMIC CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	M.T.V	MIN.	MA	TYP.	MAX.	UNIT
dV <sub>D</sub> /dt	Critical rate of change of off-state voltage	BT138F- $V_{DM} = 67\% V_{DRM(max)};$ $T_i = 125 ^{\circ}C;$ exponential	100	<b>F</b> 50	<b>G</b> 200	250	107.C	V/μs
	WWW.toox.COM.	waveform; gate open circuit		WI	1	MAN	1007.	
dV <sub>com</sub> /dt	Critical rate of change of commutating voltage	$V_{DM} = 400 \text{ V}; T_j = 95 \text{ °C};$ $I_{T(RMS)} = 12 \text{ A};$ $dI_{com}/dt = 5.4 \text{ A/ms}; \text{ gate}$	$C_{O_{N}}$	V.T.M	10	20	N.1007	V/μs
	WP 11 100Y.CO.M	dl <sub>com</sub> /dt = 5.4 A/ms; gate   open circuit		WIIN	- 7	1111	W.100	7.00
$\mathbf{t}_{gt}$	Gate controlled turn-on time	$I_{TM} = 16 \text{ A}; V_D = V_{DRM(max)}; $ $I_G = 0.1 \text{ A}; dI_G/dt = 5 \text{ A}/\mu\text{s}$	07-0	OM.T	N -	2	N. 10	μs

勝 特 力 材 料 886-3-5753170 胜特力电子(上海) 86-21-54151736 胜特力电子(深圳) 86-755-83298787 Http://www.100y.com.tw

BT138F series






Fig.1. Maximum on-state dissipation,  $P_{tot}$ , versus rms on-state current,  $I_{T(RMS)}$ , where  $\alpha$  = conduction angle.




Fig.4. Maximum permissible rms current  $I_{T(RMS)}$ , versus heatsink temperature  $T_{hs}$ .




Fig.2. Maximum permissible non-repetitive peak on-state current  $I_{TSM}$ , versus pulse width  $t_p$ , for sinusoidal currents,  $t_p \le 20$ ms.




Fig.5. Maximum permissible repetitive rms on-state current  $I_{T(RMS)}$ , versus surge duration, for sinusoidal currents, f = 50 Hz;  $T_{hs} \le 56$  °C.




Fig.3. Maximum permissible non-repetitive peak on-state current  $I_{TSM}$ , versus number of cycles, for sinusoidal currents, f = 50 Hz.






Fig.6. Normalised gate trigger voltage  $V_{GT}(T_j)/V_{GT}(25\,^{\circ}C)$ , versus junction temperature  $T_j$ .


Triacs


勝 特 力 材 料 886-3-5753170 胜特力电子(上海) 86-21-54151736 胜特力电子(深圳) 86-755-83298787 Http://www.100y.com.tw


BT138F series

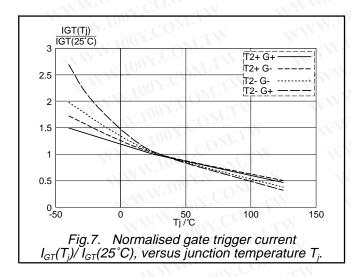

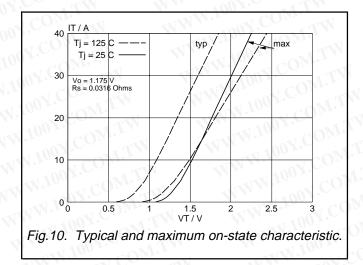




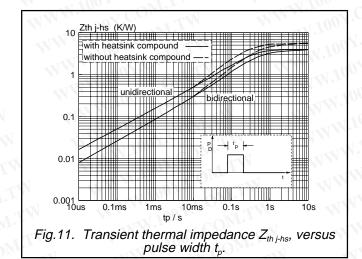



versus junction temperature T







Fig.12. Typical commutation dV/dt versus junction temperature, parameter commutation dl<sub>1</sub>/dt. The triac should commutate when the dV/dt is below the value on the appropriate curve for pre-commutation dl<sub>1</sub>/dt.

Product specification

BT138F series

# **MECHANICAL DATA**

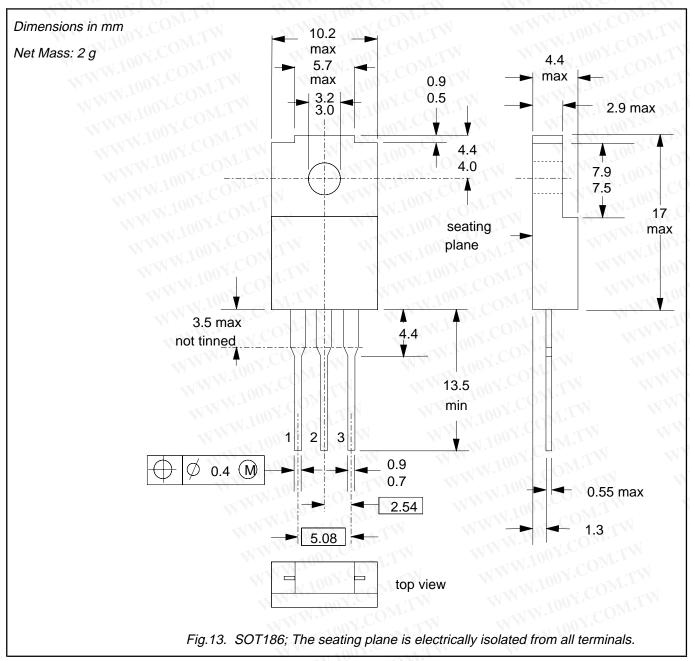

Http://www. 100y. com. tw

## **Notes**

- Accessories supplied on request: refer to mounting instructions for F-pack envelopes.
   Epoxy meets UL94 V0 at 1/8".

勝 特 力 材 料 886-3-5753170 胜特力电子(上海) 86-21-54151736 胜特力电子(深圳) 86-755-83298787

Http://www. 100y. com. tw

Triacs

BT138F series

### **DEFINITIONS**

N.TW WWW.1003.COM.TW WWW.1003.COM.TW
DW. I.A. COM. I. M. M. I. M. I. COM. I. M. I. M. I. M. COM. I. M. COM.
This data sheet contains target or goal specifications for product development.
This data sheet contains preliminary data; supplementary data may be published later.
This data sheet contains final product specifications.

#### Limiting values

Limiting values are given in accordance with the Absolute Maximum Rating System (IEC 134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of this specification is not implied. Exposure to limiting values for extended periods may affect device reliability.

#### Application information

Where application information is given, it is advisory and does not form part of the specification.

#### © Philips Electronics N.V. 1996

All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.

The information presented in this document does not form part of any quotation or contract, it is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent or other industrial or intellectual property rights.

#### LIFE SUPPORT APPLICATIONS

These products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Philips customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips for any damages resulting from such improper use or sale.